

low
voltage
system

S
S
A
R
B

Clight

www.clight-led.com

BRASS

low voltage system

A precision-machined in solid brass modular system which brings together minimalisation and customization. It is composed of a series of magnetically attached connectors and cylindrical light segments which will shape the form and function of the fixture. The system comes in 2 colors in which the user has options to choose from different lengths of luminaires, connectors and colours, to achieve endless combinations according to their needs.



4




4-BAR

6




SINGLE BAR

8




TRIANGLE

10




CUBE

12

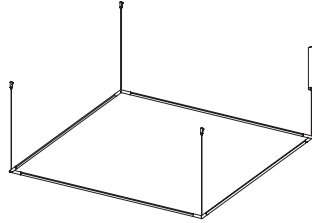


SQUARE

14

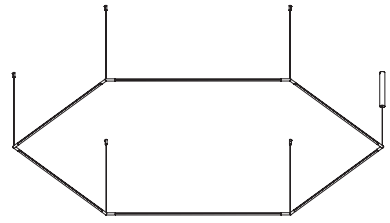


HEXAGON

16




LINEAR

18



2-LINEAR

20



WALL



| BRASS | Low Voltage System |

4-BAR 60

DIMENSIONS

96mm (w) 96mm (d)
630mm (h)

ELECTRICAL

Power: 5 Watt x4
Lumens: 330 Lumens x4
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15439/15468
15431/15461 (4 pcs)

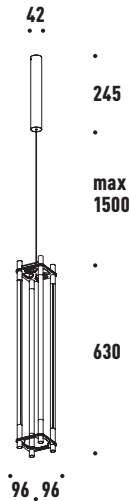

120

DIMENSIONS

96mm (w) 96mm (d)
1230mm (h)

ELECTRICAL

Power: 10 Watt x4
Lumens: 792 Lumens x4
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15439/15468
15432/15462 (4 pcs)

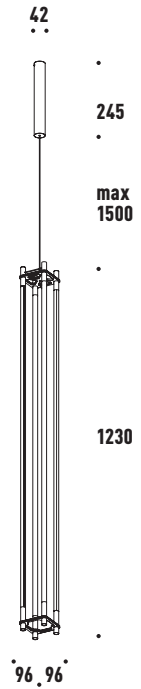

COMPONENTS (required for installation)

			60	120
Recessed Kit with Driver 15493	Surface Kit with 48V 60W Driver 15433 (Brass) 15463 (Black)	4-BAR Kit 15439 (Brass) 15468 (Black)	Line 60 15431 (Brass) 15461 (Black)	Line 120 15432 (Brass) 15462 (Black)

* Optional




| BRASS | Low Voltage System |

SINGLE BAR 35

DIMENSIONS

15mm (ø) 390mm (h)



ELECTRICAL

Power: 3 Watt
Lumens: 230 Lumens
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES

Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*


COMPONENTS

15493/15433/15463
15440/15469
15430/15460

60

DIMENSIONS

15mm (ø) 630mm (h)



ELECTRICAL

Power: 5 Watt
Lumens: 330 Lumens
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES

Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*


COMPONENTS

15493/15433/15463
15440/15469
15431/15461

120

DIMENSIONS

15mm (ø) 1185mm (h)

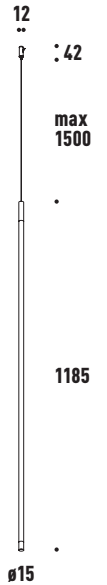

ELECTRICAL

Power: 10 Watt
Lumens: 792 Lumens
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES

Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15440/15469
15432/15462

COMPONENTS (required for installation)

	35	60	120
			
Recessed Kit with Driver 15493			
			
Surface Kit with 48V 60W Driver 15433 (Brass) 15463 (Black)			
			
Single Bar Kit 15440 (Brass) 15469 (Black)			
			
Line 35 15430 (Brass) 15460 (Black)			
			
Line 60 15431 (Brass) 15461 (Black)			
			
Line 120 15432 (Brass) 15462 (Black)			

* Optional



TRIANGLE 60

DIMENSIONS

1170mm (w) 1010mm (d)

ELECTRICAL

Power: 5 Watt x3
Lumens: 330 Lumens x3
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15436/15466
15431/15461 (3 pcs)

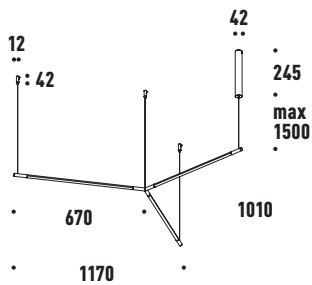

120

DIMENSIONS

2760mm (w) 2650mm (d)

ELECTRICAL

Power: 10 Watt x3
Lumens: 792 Lumens x3
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15436/15466
15432/15462 (3 pcs)

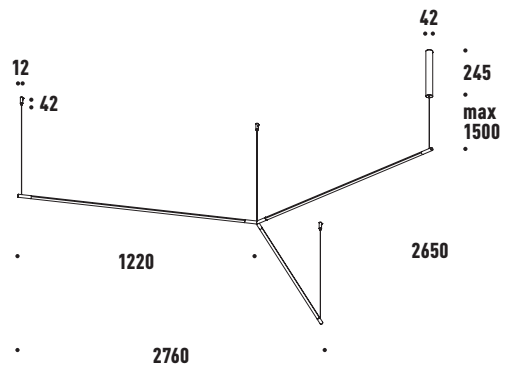


COMPONENTS (required for installation)




Recessed Kit with Driver
15493



Surface Kit with 48V 60W Driver
15433 (Brass)
15463 (Black)

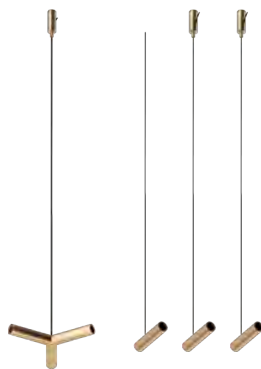

Triangle Kit
15436 (Brass)
15466 (Black)



Line 60
15431 (Brass)
15461 (Black)



Line 120
15432 (Brass)
15462 (Black)



CUBE 60

DIMENSIONS

685mm (w) 685mm (d)
685mm (h)

ELECTRICAL

Power: 5 Watt x12
Lumens: 330 Lumens x12
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493
15438/15467
15431/16461 (12 pcs)

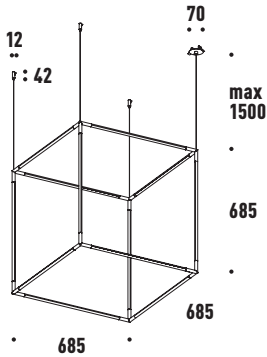

120

DIMENSIONS

1240mm (w) 1240mm (d)
1240mm (h)

ELECTRICAL

Power: 10 Watt x12
Lumens: 792 Lumens x12
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493
15438/15467
15432/15462 (12 pcs)

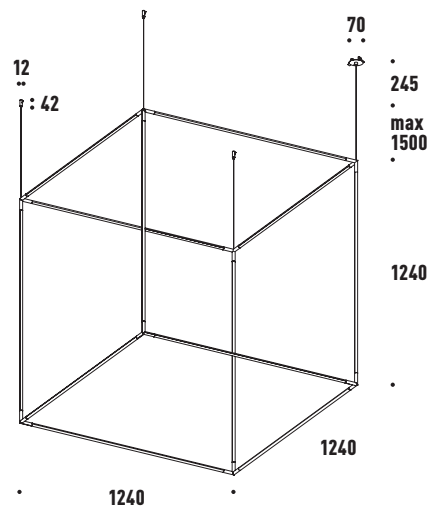


COMPONENTS (required for installation)

60


120




**Recessed Kit
with Driver**
15493

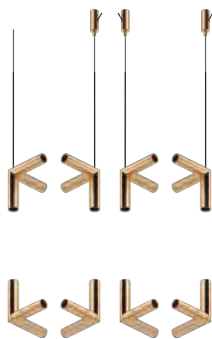

Cube Kit
15438 (Brass)
15467 (Black)



Line 60
15431 (Brass)
15461 (Black)

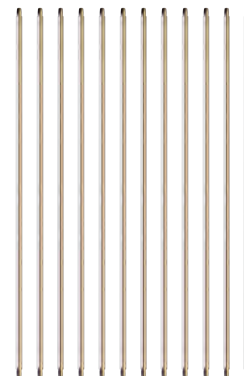

Line 120
15432 (Brass)
15462 (Black)

* Optional



SQUARE 60

DIMENSIONS

670mm (w) 670mm (d)

ELECTRICAL

Power: 5 Watt x4
 Lumens: 330 Lumens x4
 48 V LED
 3000 Kelvin
 90 CRI
 IP20

MATERIAL

Brass

FINISHES


Brushed Brass
 Brushed Black

DIMMING

0-10 V*
 DALI*

COMPONENTS

15493/15433/15463
 15441/15470
 15431/15461 (4 pcs)

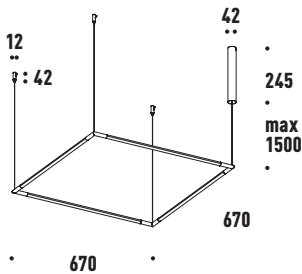

120

DIMENSIONS

1240mm (w) 1240mm (d)

ELECTRICAL

Power: 10 Watt x4
 Lumens: 792 Lumens x4
 48 V LED
 3000 Kelvin
 90 CRI
 IP20

MATERIAL

Brass

FINISHES


Brushed Brass
 Brushed Black

DIMMING

0-10 V*
 DALI*

COMPONENTS

15493/15433/15463
 15441/15470
 15432/15462 (4 pcs)

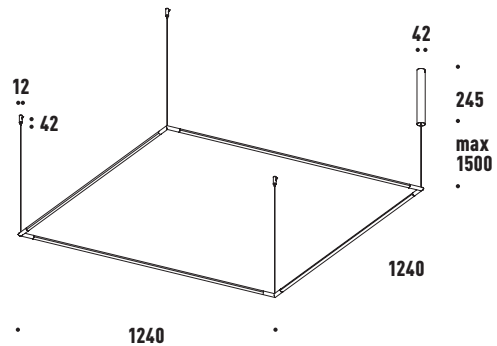


COMPONENTS (required for installation)




Recessed Kit with Driver
15493



Surface Kit with 48V 60W Driver
15433 (Brass)
15463 (Black)

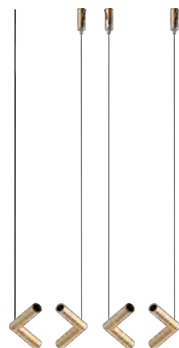

Square Kit
15441 (Brass)
15470 (Black)



Line 60
15431 (Brass)
15461 (Black)



Line 120
15432 (Brass)
15462 (Black)

* Optional



HEXAGON 60

DIMENSIONS

1340mm (w) 1180mm (d)

ELECTRICAL

Power: 5 Watt x6
 Lumens: 330 Lumens x6
 48 V LED
 3000 Kelvin
 90 CRI
 IP20

MATERIAL

Brass

FINISHES


Brushed Brass
 Brushed Black

DIMMING

0-10 V*
 DALI*

COMPONENTS

15493/15433/15463
 15435/15456
 15431/15461 (6 pcs)

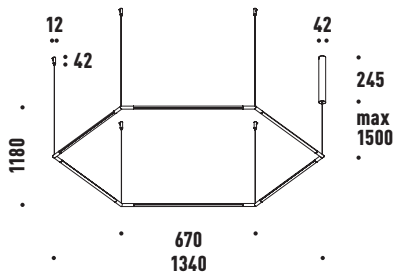

120

DIMENSIONS

2455mm (w) 2135mm (d)

ELECTRICAL

Power: 10 Watt x6
 Lumens: 792 Lumens x6
 48 V LED
 3000 Kelvin
 90 CRI
 IP20

MATERIAL

Brass

FINISHES


Brushed Brass
 Brushed Black

DIMMING






0-10 V*
 DALI*

COMPONENTS

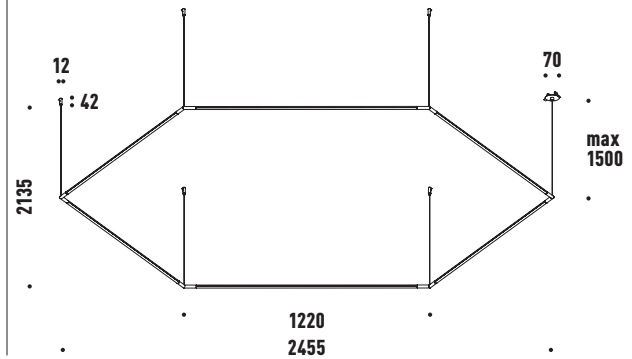15493
 15435/15456
 15432/15462 (6 pcs)



COMPONENTS (required for installation)

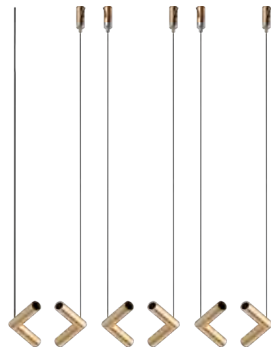	60	120
 <p>Recessed Kit with Driver 15493</p>	 <p>Surface Kit with 48V 60W Driver 15433 (Brass) 15463 (Black)</p>	 <p>Hexagon Kit 15435 (Brass) 15456 (Black)</p>
	 <p>Line 60 15431 (Brass) 15461 (Black)</p>	 <p>Line 120 15432 (Brass) 15462 (Black)</p>

* Optional



| BRASS | Low Voltage System |

LINEAR 60

DIMENSIONS

685mm (w) 15mm (ø)

ELECTRICAL

Power: 5 Watt
 Lumens: 330 Lumens
 48 V LED
 3000 Kelvin
 90 CRI
 IP20

MATERIAL

Brass

FINISHES


Brushed Brass
 Brushed Black

DIMMING

0-10 V*
 DALI*

COMPONENTS

15493/15433/15463
 15434/15464
 15459/15472
 15431/15461

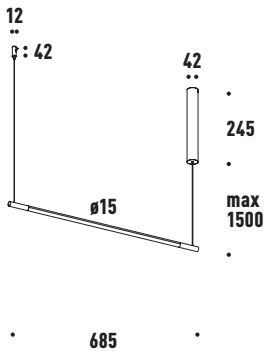

120

DIMENSIONS

1240mm (w) 15mm (ø)

ELECTRICAL

Power: 10 Watt
 Lumens: 792 Lumens
 48 V LED
 3000 Kelvin
 90 CRI
 IP20

MATERIAL

Brass

FINISHES


Brushed Brass
 Brushed Black

DIMMING

0-10 V*
 DALI*

COMPONENTS

15493/15433/15463
 15434/15464
 15459/15472
 15432/15462

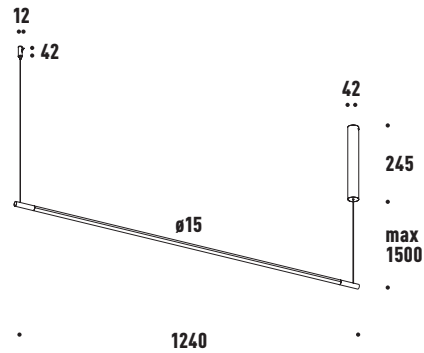

COMPONENTS (required for installation)

				60	120
Recessed Kit with Driver 15493	Surface Kit with 48W Driver 15433 (Brass) 15463 (Black)	Linear Kit 15434 (Brass) 15464 (Black)	Extension Kit 15459 (Brass) 15472 (Black)	Line 60 15431 (Brass) 15461 (Black)	Line 120 15432 (Brass) 15462 (Black)

* Optional



2-LINEAR 60

DIMENSIONS

685mm (w) 96mm (d)
77mm (h)

ELECTRICAL

Power: 5 Watt x2
Lumens: 330 Lumens x2
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15437/15492
15494/15495
15431/15461

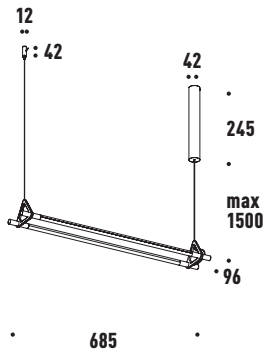

120

DIMENSIONS

1240mm (w) 96mm (d)
77mm (h)

ELECTRICAL

Power: 10 Watt x2
Lumens: 792 Lumens x2
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING







0-10 V*
DALI*

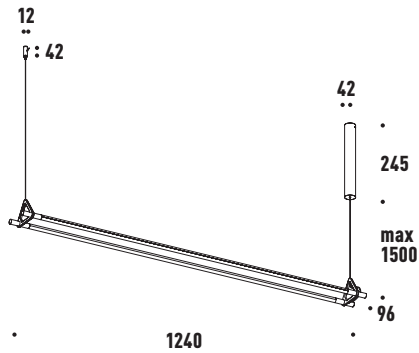COMPONENTS

15493/15433/15463
15437/15492
15494/15495
15432/15462

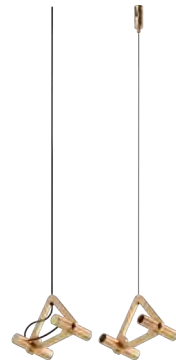

COMPONENTS (required for installation)

				60	120
					
Recessed Kit with Driver 15493	Surface Kit with 48V 60W Driver 15433 (Brass) 15463 (Black)	2-Linear Kit 15437 (Brass) 15492 (Black)	Extension Kit 15494 (Brass) 15495 (Black)	Line 60 15431 (Brass) 15461 (Black)	Line 120 15432 (Brass) 15462 (Black)

* Optional



WALL 35

DIMENSIONS

766mm (w) 48mm (d)
90mm (h)

FINISHES

Brushed Brass
Brushed Black

ELECTRICAL

Power: 3 Watt x2
Lumens: 230 Lumens x2
48 V LED
3000 Kelvin
90 CRI
IP20

DIMMING


0-10 V*
DALI*

MATERIAL

Brass

COMPONENTS

15442/15471

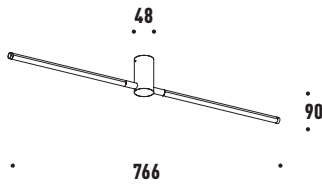

REQUIRED for installation



Wall Kit
15442 (Brass)
15471 (Black)



BRASS

low voltage system

We Are C-LIGHT

Being a young company, we always focus on the most advanced LED technology.

As all relevant development processes are carried out in house, we can produce custom designs and create new collections followed by the latest trends quickly and flexibly.

DESIGNED in EUROPE MADE in CHINA

C-light factory is located in Zhongshan China. The lowered cost that we achieved is being passed directly on to you.

C-light has been working with European lighting designers to develop custom lights of the highest technical standard. C-light uses the best materials in the market with Hardness Quality Checks for each product. The result is Premium Quality with reasonable price.

HEADQUARTER

Hatnufa 7 St.
9342207 Jerusalem
Israel

LOGISTIC CENTER

Tsela ha-Har St. 47
7178127 Modein
Israel

T +972 (2) 6727811/2
F +972 (2) 6727813

office@clight-led.com
export@clight-led.com

Clight
by **Cabasso Group**