

LIGHT COLLEC- TION

Clight

We Are C-LIGHT

Being a young company, we always focus on the most advanced LED technology.

As all relevant development processes are carried out in house, we can produce custom designs and create new collections followed by the latest trends quickly and flexibly.


C-light has been working with European lighting designers to develop custom lights of the highest technical standard. C-light uses the best materials in the market with Hardness Quality Checks for each product. The result is Premium Quality with reasonable price.

We are looking for worldwide partners from the High-end lighting industry. Please contact us for more information about B2B opportunities.




06	SMD Downlights
28	COB Downlights
54	IP54 Lights
72	SPOT Lights
90	STEP Lights
98	WALL Lights
120	SUSPENDED Lights
142	DOTTA Recessed Luminaires
158	FLOW Low Voltage System
184	micro Low Voltage System
200	BRASS Low Voltage System
220	OUTDOOR Collection


SMD Downlights | 06




BRI | 08




BRIS | 12



SELINE | 16




BT PANEL | 20



COSTA | 24


COB Downlights | 28




CONE | 30




MINI | 34




PRO | 38



MINI LENS | 42



Trimless DOTS | 46



RING DOTS | 50


IP54 Lights | 54




RON | 56



TORI | 60



COB TUBE | 64



SMD TUBE | 68


SPOT Lights | 72



TOMI | 74



TORRES | 80



TUBE | 86

STEP Lights | 90



MINI LINE | 92




MINI DROP | 96




MINI SQUARE | 96


WALL Lights | 98




NICK | 100




NOVA | 104



NOVA Recessed | 108



VENTO | 112




VENTO Reading | 116


SUSPENDED Lights | 120



JIMI | 122



MOON | 126



GLASS BALL | 130




JENNY | 134



TOMI Hanging | 138

DOTTA Recessed Luminaires | 142



ACYRLIC | 146



CONE A | 148



CONE B | 150



SQUARE | 152




SPOT | 154




WALL-WASHER | 156


FLOW Low Voltage System | 158




TRACKS | 160




TON | 166




TOMI | 168




LIGHT STRIPE | 170



DOTS | 172




BOOK/OUT | 174



GLASS BALL | 176



MOON | 178




Hanging RAIN | 180




Hanging TOMI | 182


micro Low Voltage System | 184




TRACKS | 186




TON | 190




TOMI | 192



LIGHT STRIPE | 194



DOTS | 196



GLASS BALL | 198


BRASS Low Voltage System | 200




4-BAR | 202




SINGLE BAR | 204




TRIANGLE | 206




CUBE | 208




SQUARE | 210



HEXAGON | 212



LINEAR | 214




2-LINEAR | 216




WALL | 218

OUTDOOR Collection | 220




ANTRO | 222




DELLA | 224



FLATO | 228




RIO | 232



ESTRA | 236



COB TUBE | 238




SMD TUBE | 240




MARS | 242



MODO | 244



VEGA | 248



POLE | 250



FLORA | 256

SMD DOWNLIGHTS

BRI

BRIS

SELINE

BT PANEL

COSTA



Erhan Yavuz


BRI



SMD Downlight


A modern and elegant design, which complements the surrounding style. These recessed downlights create uniform light distribution for use in general lighting applications. The depth creates an anti glare effect. Available in three sizes.




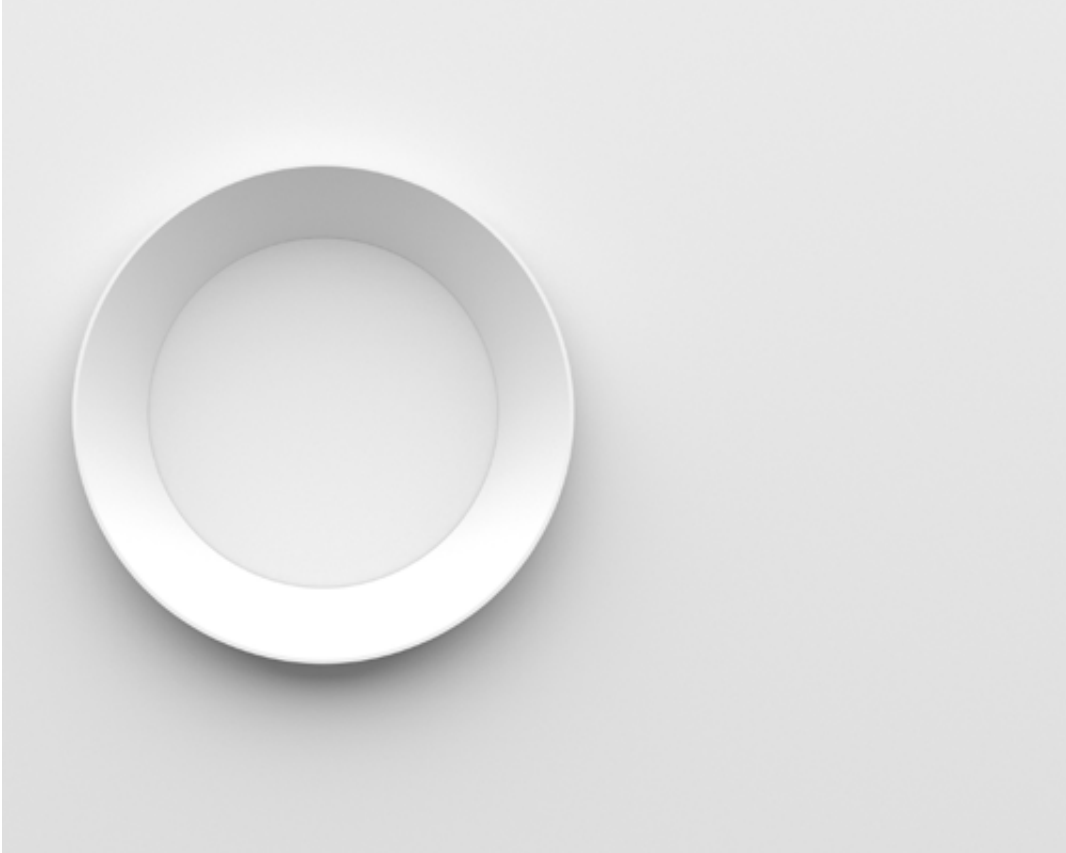


- High quality diffuser
- Integrated SMD backlight
- Bold aluminum frame



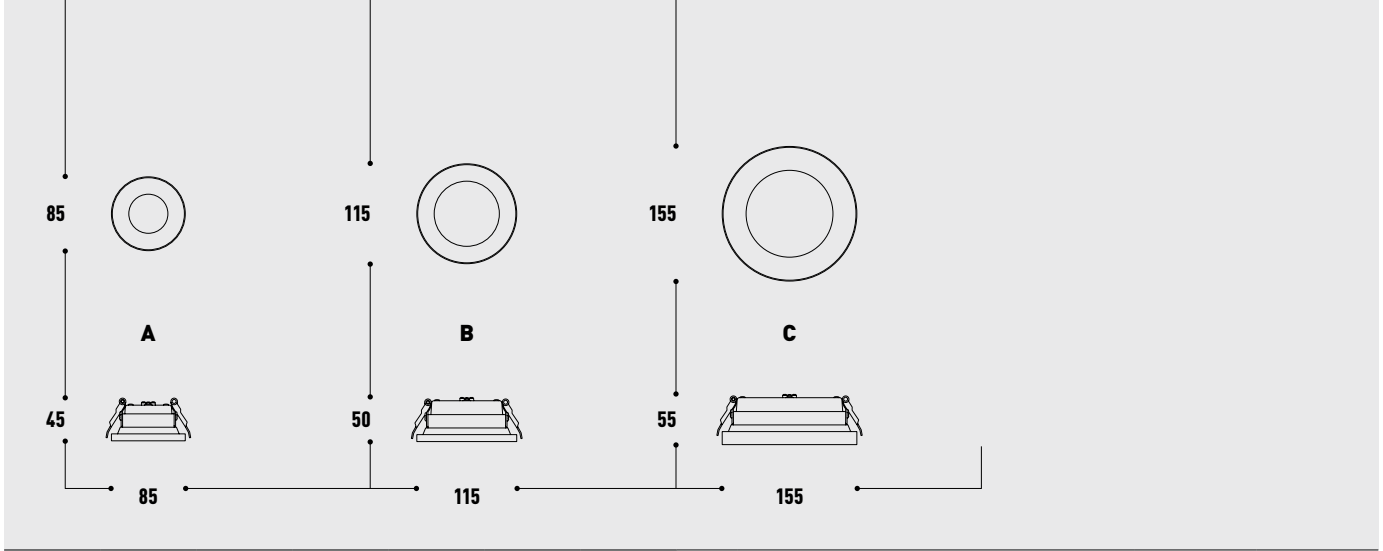


LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
SMD	270	3000	3.5	350	90°	75	A	White	15001
								Black	150011
SMD	1125	3000	11	350	94°	105	B	White	15002
								Black	150022
SMD	1725	3000	17	350	92°	145	C	White	15003
								Black	150033

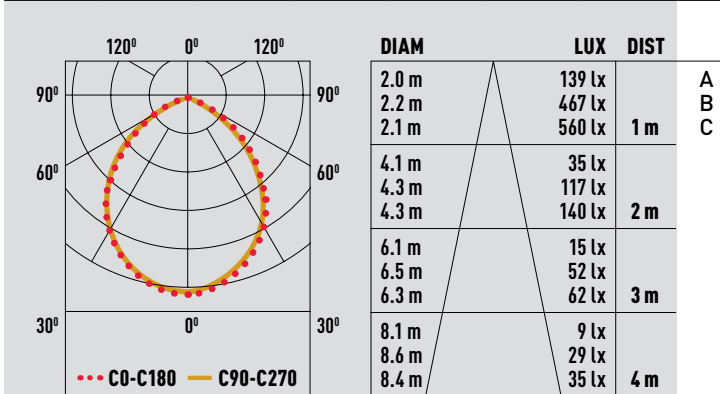

CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	47.5*38*24.5	60	0.044	10.8
B	50*26*32	40	0.041	12.4
C	50*34*37	30	0.062	12.4

BRIS




SMD Downlight

BRIS is a recessed collection with SMD backlight. The product comes with a high quality diffuser that spreads soft and warm light to the space. The depth creates an anti glare effect. It is perfect for private interiors and public buildings. Three sizes to choose from.







- High quality diffuser
- Integrated SMD backlight
- Aluminum body

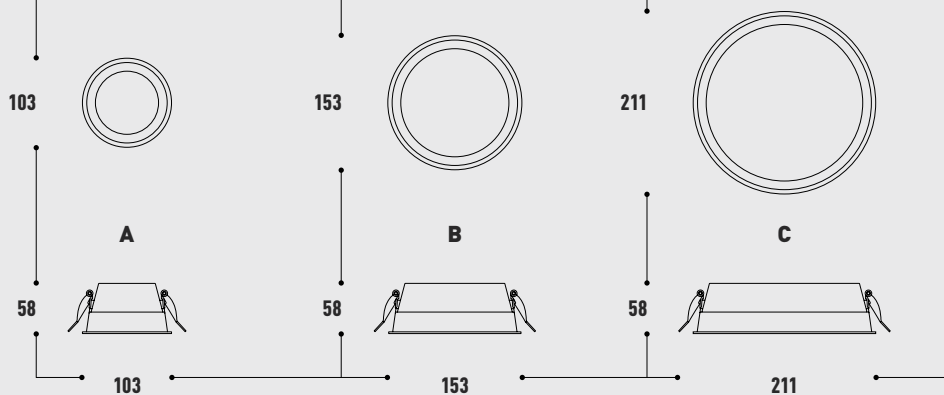

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
SMD	940	3000	10	300	90°	98	A	White	15004
								Black	150044
SMD	1400	3000	16	300	100°	148	B	White	15005
								Black	150055
SMD	1870	3000	24	300	100°	206	C	White	15006
								Black	150066

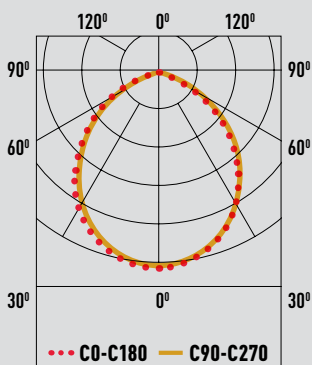


DIAM	LUX	DIST
2.0 m	349 lx	1 m
2.3 m	582 lx	
2.4 m	819 lx	
4.1 m	87 lx	2 m
4.7 m	145 lx	
4.9 m	205 lx	
6.1 m	39 lx	3 m
7.0 m	65 lx	
7.3 m	91 lx	
8.1 m	22 lx	4 m
9.4 m	37 lx	
9.8 m	51 lx	




CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	63.5*28*35	60	0.062	14.4
B	64*38*34	40	0.082	18.8
C	50*38.5*46	24	0.088	15


SELINE




SMD Downlight

SELINE is a refined integrated led spot light, with a minimalist design frame. Built with SMD backlight, it is equipped with a high quality diffuser that spreads soft and warm light to the space. These downlights come in three sizes. Available in sandy white or black.

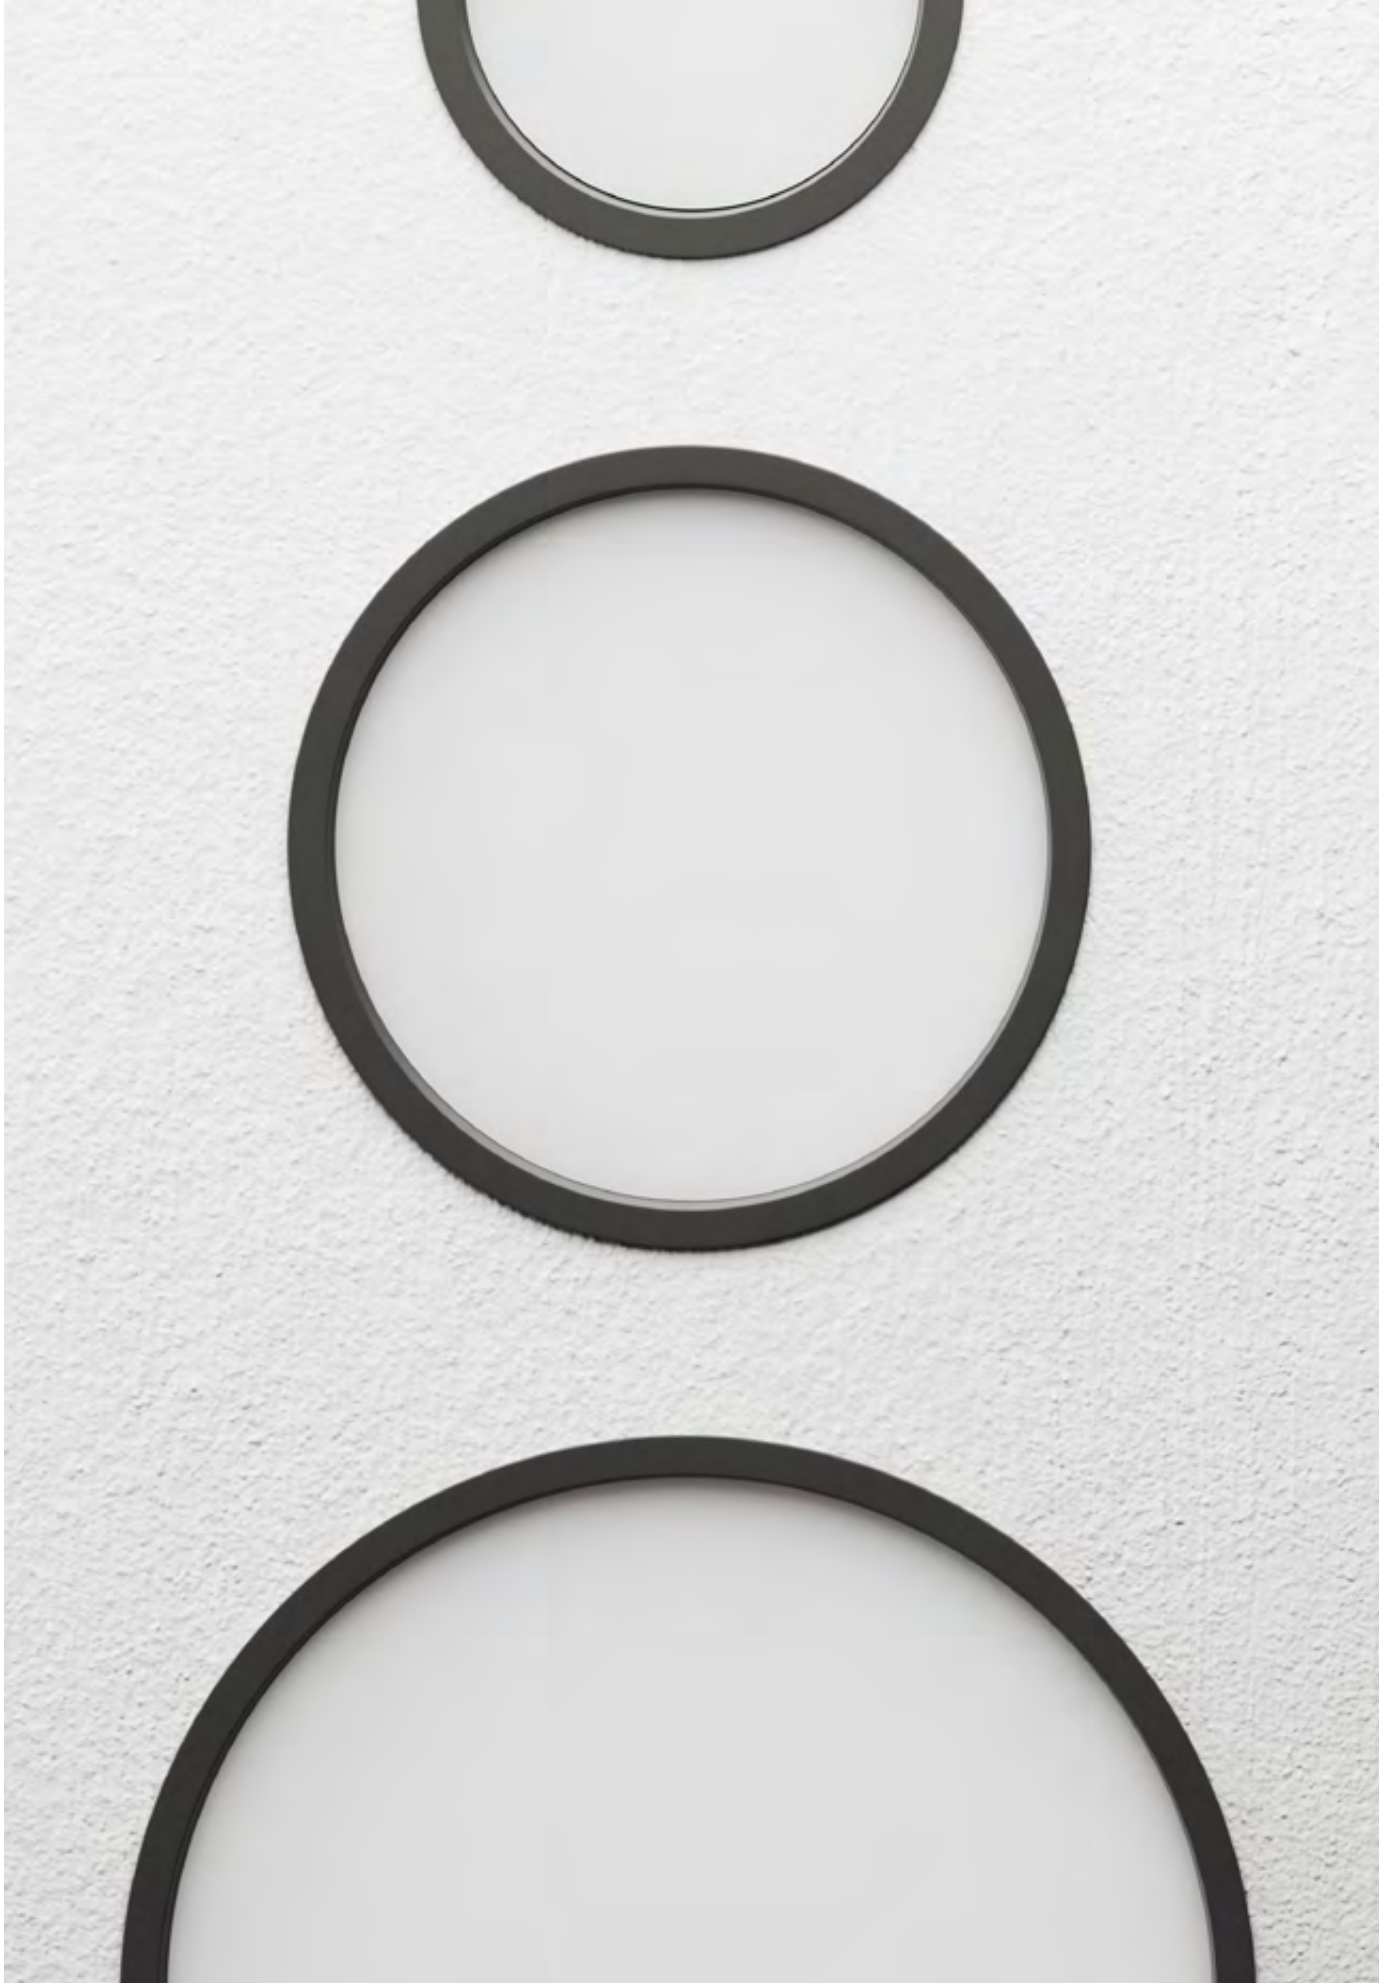


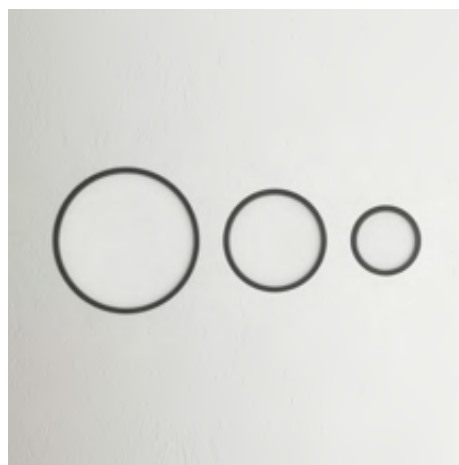

- High quality diffuser
- Integrated SMD backlight
- Aluminum body

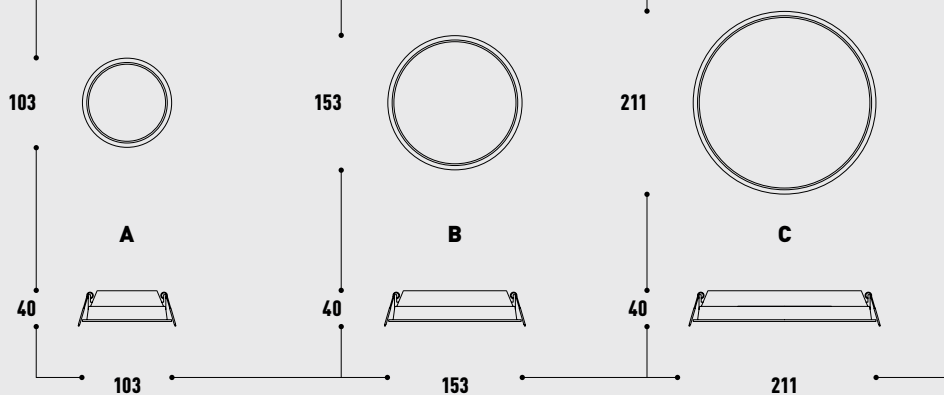

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
SMD	980	3000	10	300	106°	98	A	White	15007
								Black	150077
SMD	1400	3000	16	300	106°	148	B	White	15008
								Black	150088
SMD	2250	3000	24	300	106°	206	C	White	15009
								Black	150099

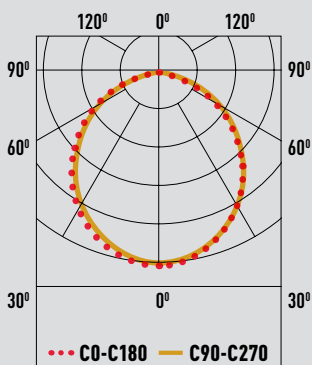

DIAM	LUX	DIST
2.7 m	302 lx	1 m
2.7 m	514 lx	
2.7 m	825 lx	
5.3 m	75 lx	2 m
5.4 m	128 lx	
5.4 m	206 lx	
8.0 m	34 lx	3 m
8.2 m	57 lx	
8.0 m	92 lx	
10.6 m	19 lx	4 m
10.9 m	32 lx	
10.7 m	52 lx	

A
B
C




CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	43.5*28*35	60	0.042	13
B	54*38*34	40	0.069	13.2
C	52*33*46	24	0.078	9.8


BT PANEL

SMD Downlight



BT PANEL is an ideal lighting solution for commercial spaces such as offices, schools, hospitals, and supermarkets. This high-quality and durable backlight panel provides uniform lighting with no yellowing problem. It's energy-efficient, cost-effective, and comes in different color temperatures to suit any project that requires a high-quality and uniform light source.

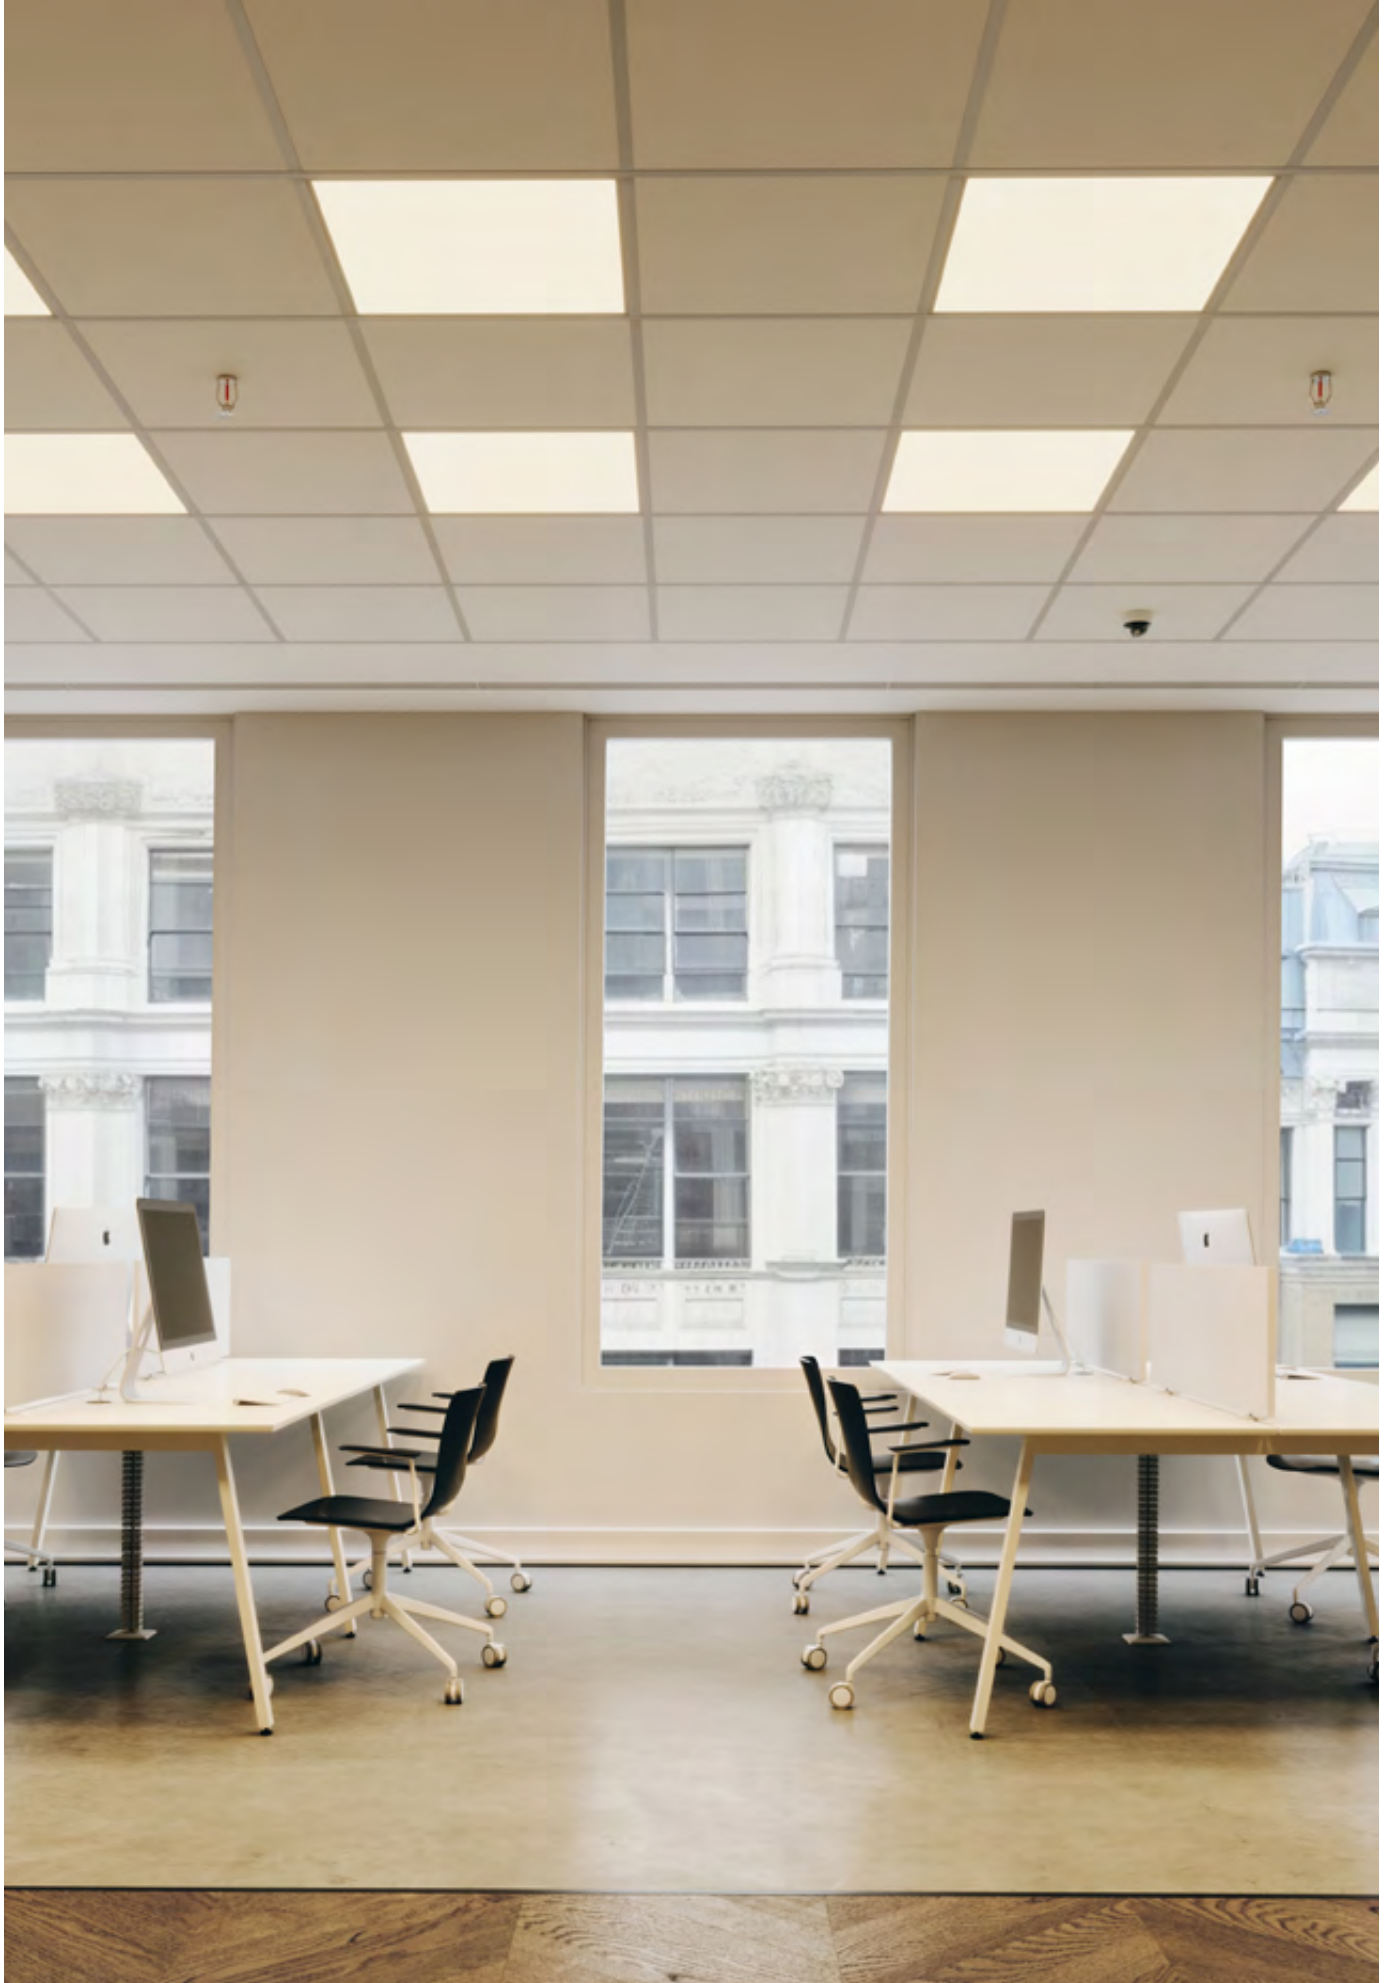

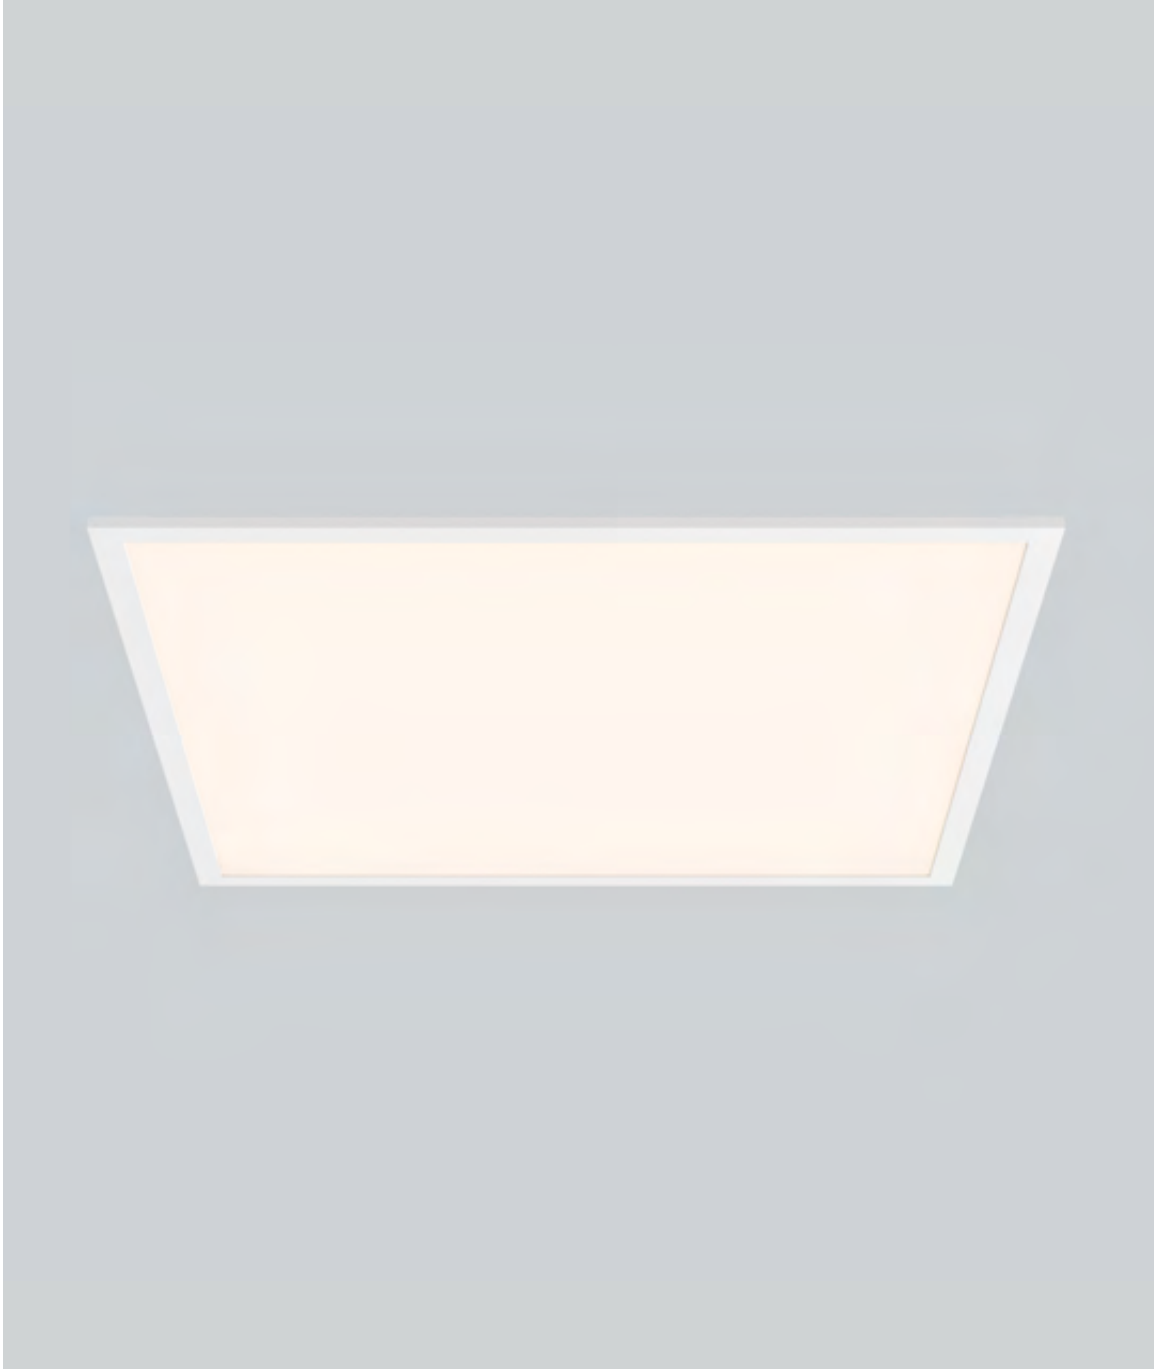

- Uniform light effect with optical lens
- Interchangeable CCT (3000K + 4000K + 5700K) with slide switch
- Integrated iron plate design provides excellent thermal management
- Ultra slim, 25mm only
- Built-out driver





LED	lm	K	W	OUTPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
SMD	3600	3000 4000 5700	36	900	120°	-	•	White	15518



CARTON	Size (L*W*H) cm	PCS	CBM	kg
•	67.5*20*62	6	0.084	8.4

COSTA




SMD Downlight

The COSTA series, available in diameters of 40cm, 60cm, and 80cm, epitomizes technical precision and design harmony. Each fixture provides uniform, wide-angle luminescence with minimal shadowing, due to its superior LED technology. Ideal for a spectrum of applications, COSTA ensures energy-efficient, high-quality lighting solutions for both residential and commercial environments.







- Surface light
- High quality diffuser
- Integrated SMD backlight
- Aluminum body
- CRI ≥ 80

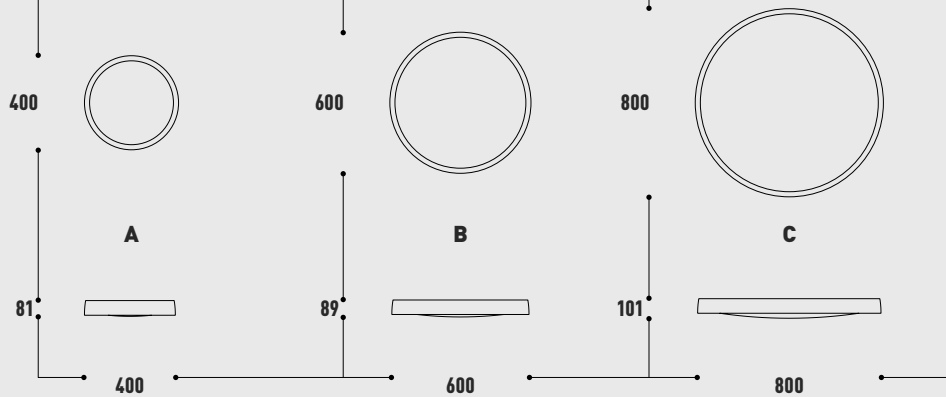

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
SMD	1580	3000	30	750	90°	-	A	White	15450
								Black	15451
								White/Gold	15452
SMD	3200	3000	60	2x750	90°	-	B	White	15453
								Black	15454
								White/Gold	15455
SMD	5200	3000	100	2x1200	90°	-	C	White	15456
								Black	15457
								White/Gold	15458

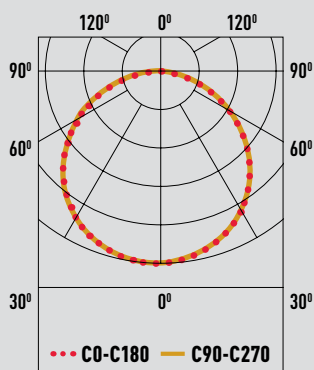

DIAM	LUX	DIST	
4.2 m	303 lx	1.5 m	A
3.1 m	1185 lx	1.0 m	B
4.4 m	1248 lx	1.5 m	C
6.3 m	135 lx	2.3 m	
6.2 m	296 lx	2.0 m	
6.5 m	555 lx	2.3 m	
9.9 m	56 lx	3.5 m	
9.4 m	132 lx	3.0 m	
10.1 m	229 lx	3.5 m	
11.3 m	43 lx		
12.5 m	74 lx		
11.6 m	176 lx	4.0 m	

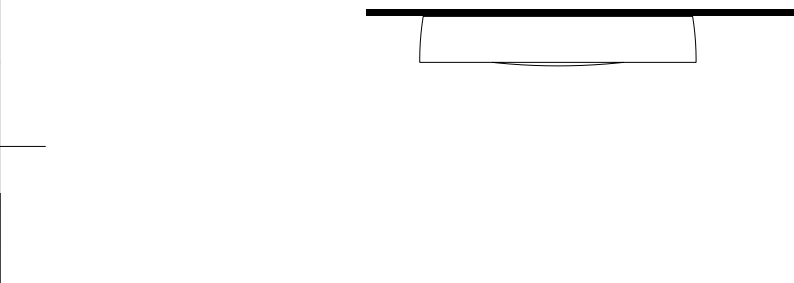

CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	45*45*45	4	0.091	8
B	65*65*10.5	1	0.044	4.65
C	86*86*10.5	1	0.078	8

COB DOWNLIGHTS

CONE
MINI
PRO


MINI LENS
DOTS Trimless
RING DOTS




CONE

COB Downlight


CONE is a range of circular recessed downlights featuring a trimless design and deep-set LED position that reduces glare. The luminaire is available in fixed and wall-washer versions that can be used throughout a project for many different lighting needs.

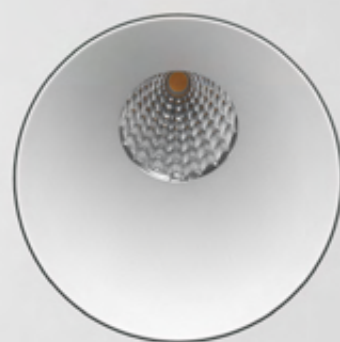


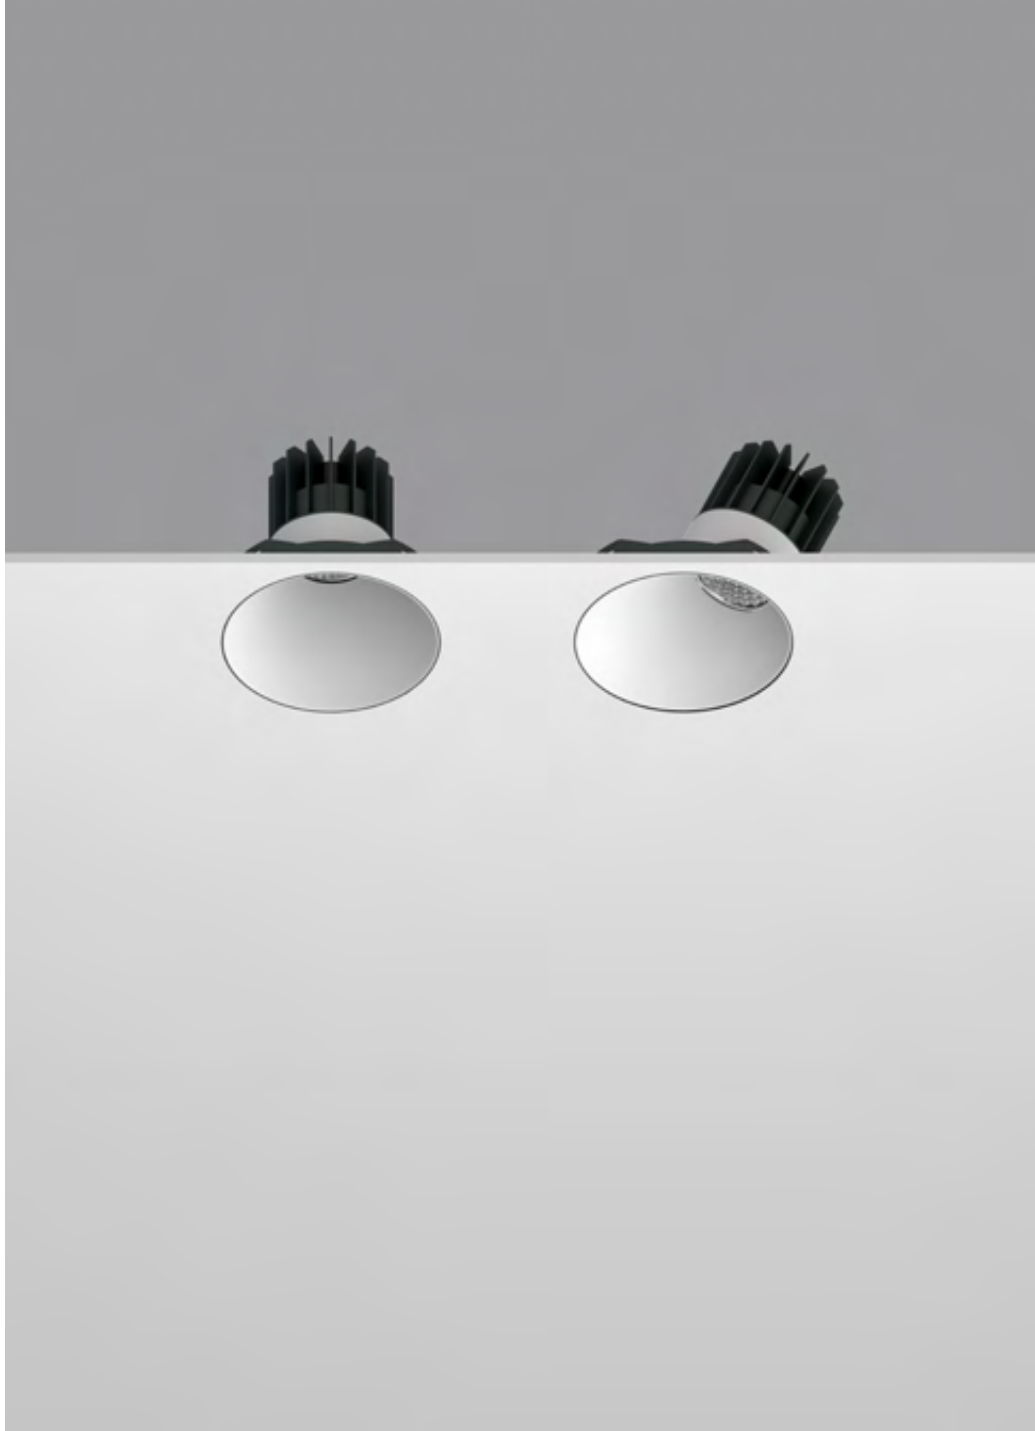


- Integrated COB LED
- CRI 90
- Trimless frame



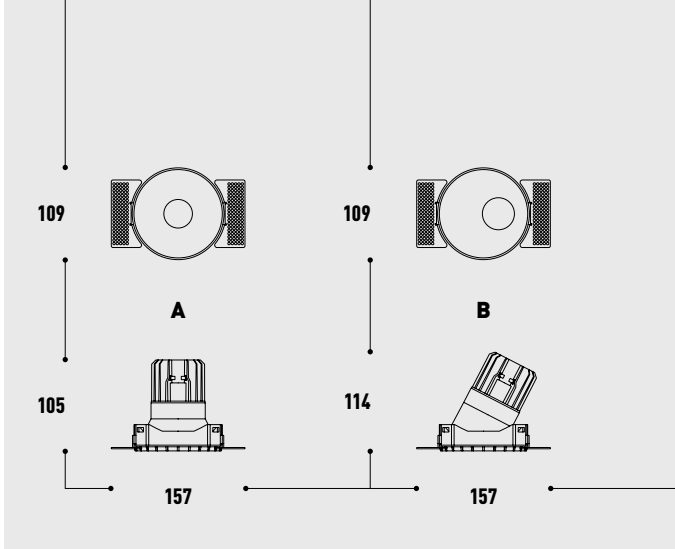

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	1326	3000	13	350	60°	110	A	White	15017
								Black	150177
COB	1326	3000	13	350	60°	110	B	White	15018
								Black	150188

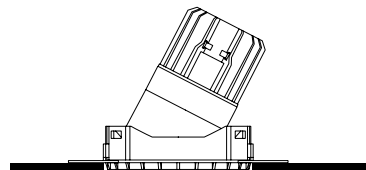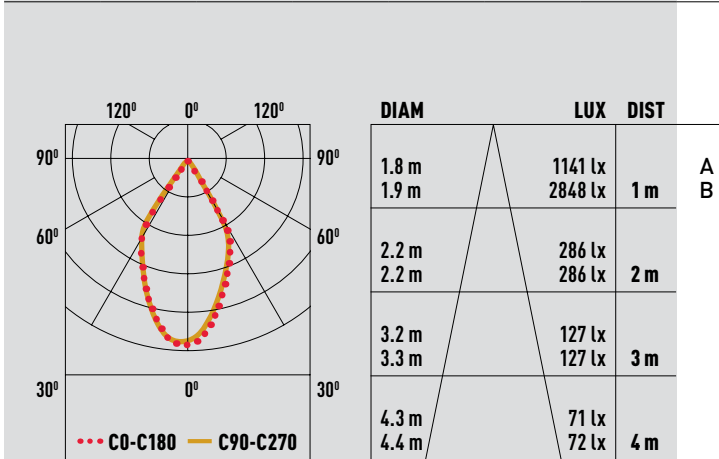

CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	46*40*28	12	0.051	8.7
B	46*40*28	12	0.051	8.7

MINI

COB Downlight


An ultra-low glare accent COB downlight with a minimal design. Two different sizes and availability of models with CRI90 make it easy to adapt the luminaire to the needs of any interior.







- Integrated COB LED
- Anti glare effect
- CRI 90
- IP54



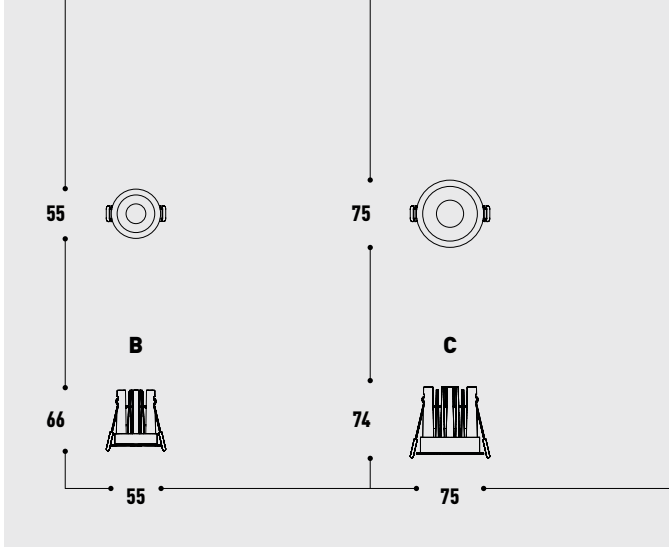

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	550	3000	8	200	33°	50	B	White	15027
								Black	150277
COB	960	3000	15	350	25°	70	C	White	15028
								Black	150288

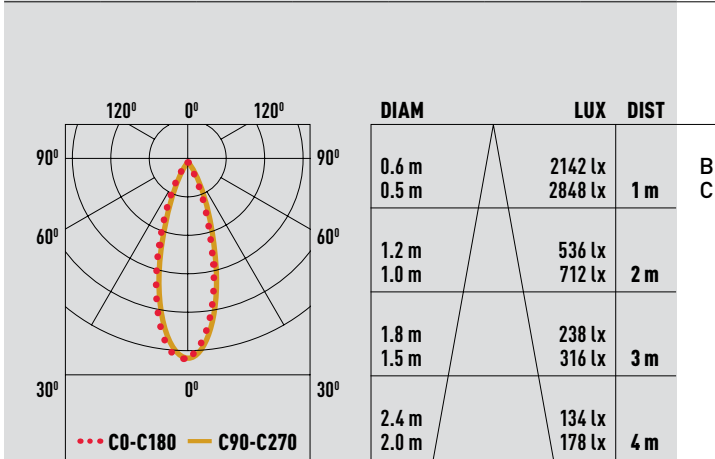

CARTON	Size (L*W*H) cm	PCS	CBM	kg
B	47.5*20*40	50	0.038	7.5
C	60*25*33	40	0.050	10.8

PRO


COB Downlight

The PRO family of lights is a cutting-edge lighting solution for general lighting needs. With unparalleled brightness and efficiency, they ensure optimal illumination in any environment. These lights provide a wide range of colors with minimal variation, delivering consistent and uniform lighting for a visually pleasing experience.





- Integrated COB LED
- Anti glare effect
- CRI 80



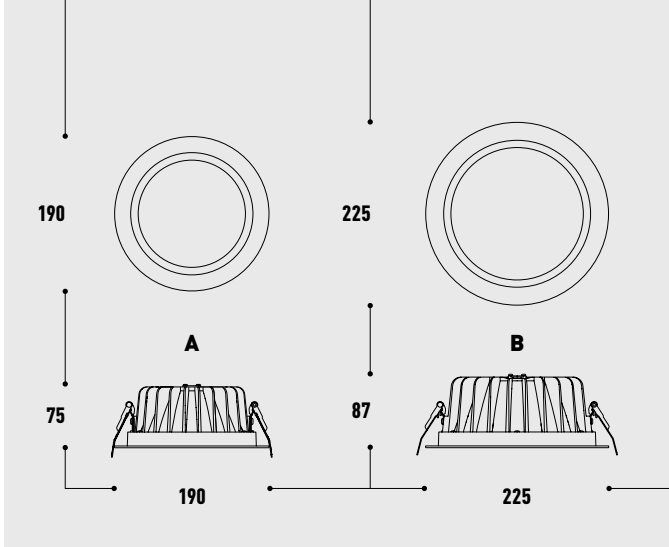


LED	lm	K	W	INPUT	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	3600	4000	33	200-240V	60°	180	A	White	15390
								Black	15391
COB	4600	4000	42	200-240V	60°	215	B	White	15392
								Black	15393

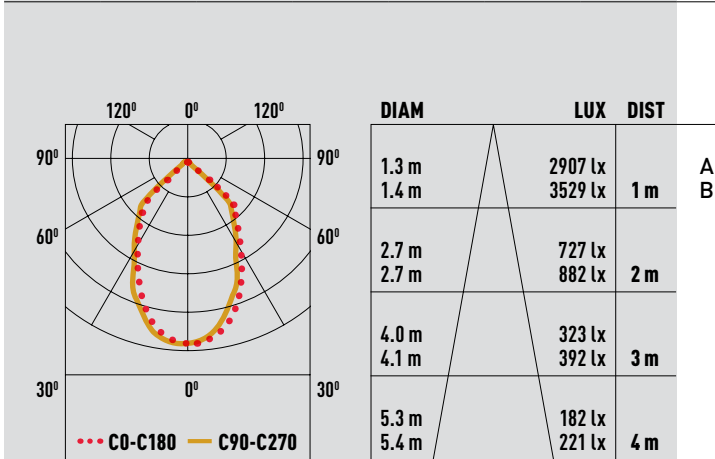


CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	66*46*20.5	10	0.062	NA
B	54.5*51*35	10	0.097	NA

MINI Lens




CREE Downlight

MINI-LENS is a high-end, modern linear luminaire which elegantly combines points of light. Comes in four different lengths, it is known as a low glare downlight that can be perfectly incorporated into any architecture thanks to its extraordinary compact size.


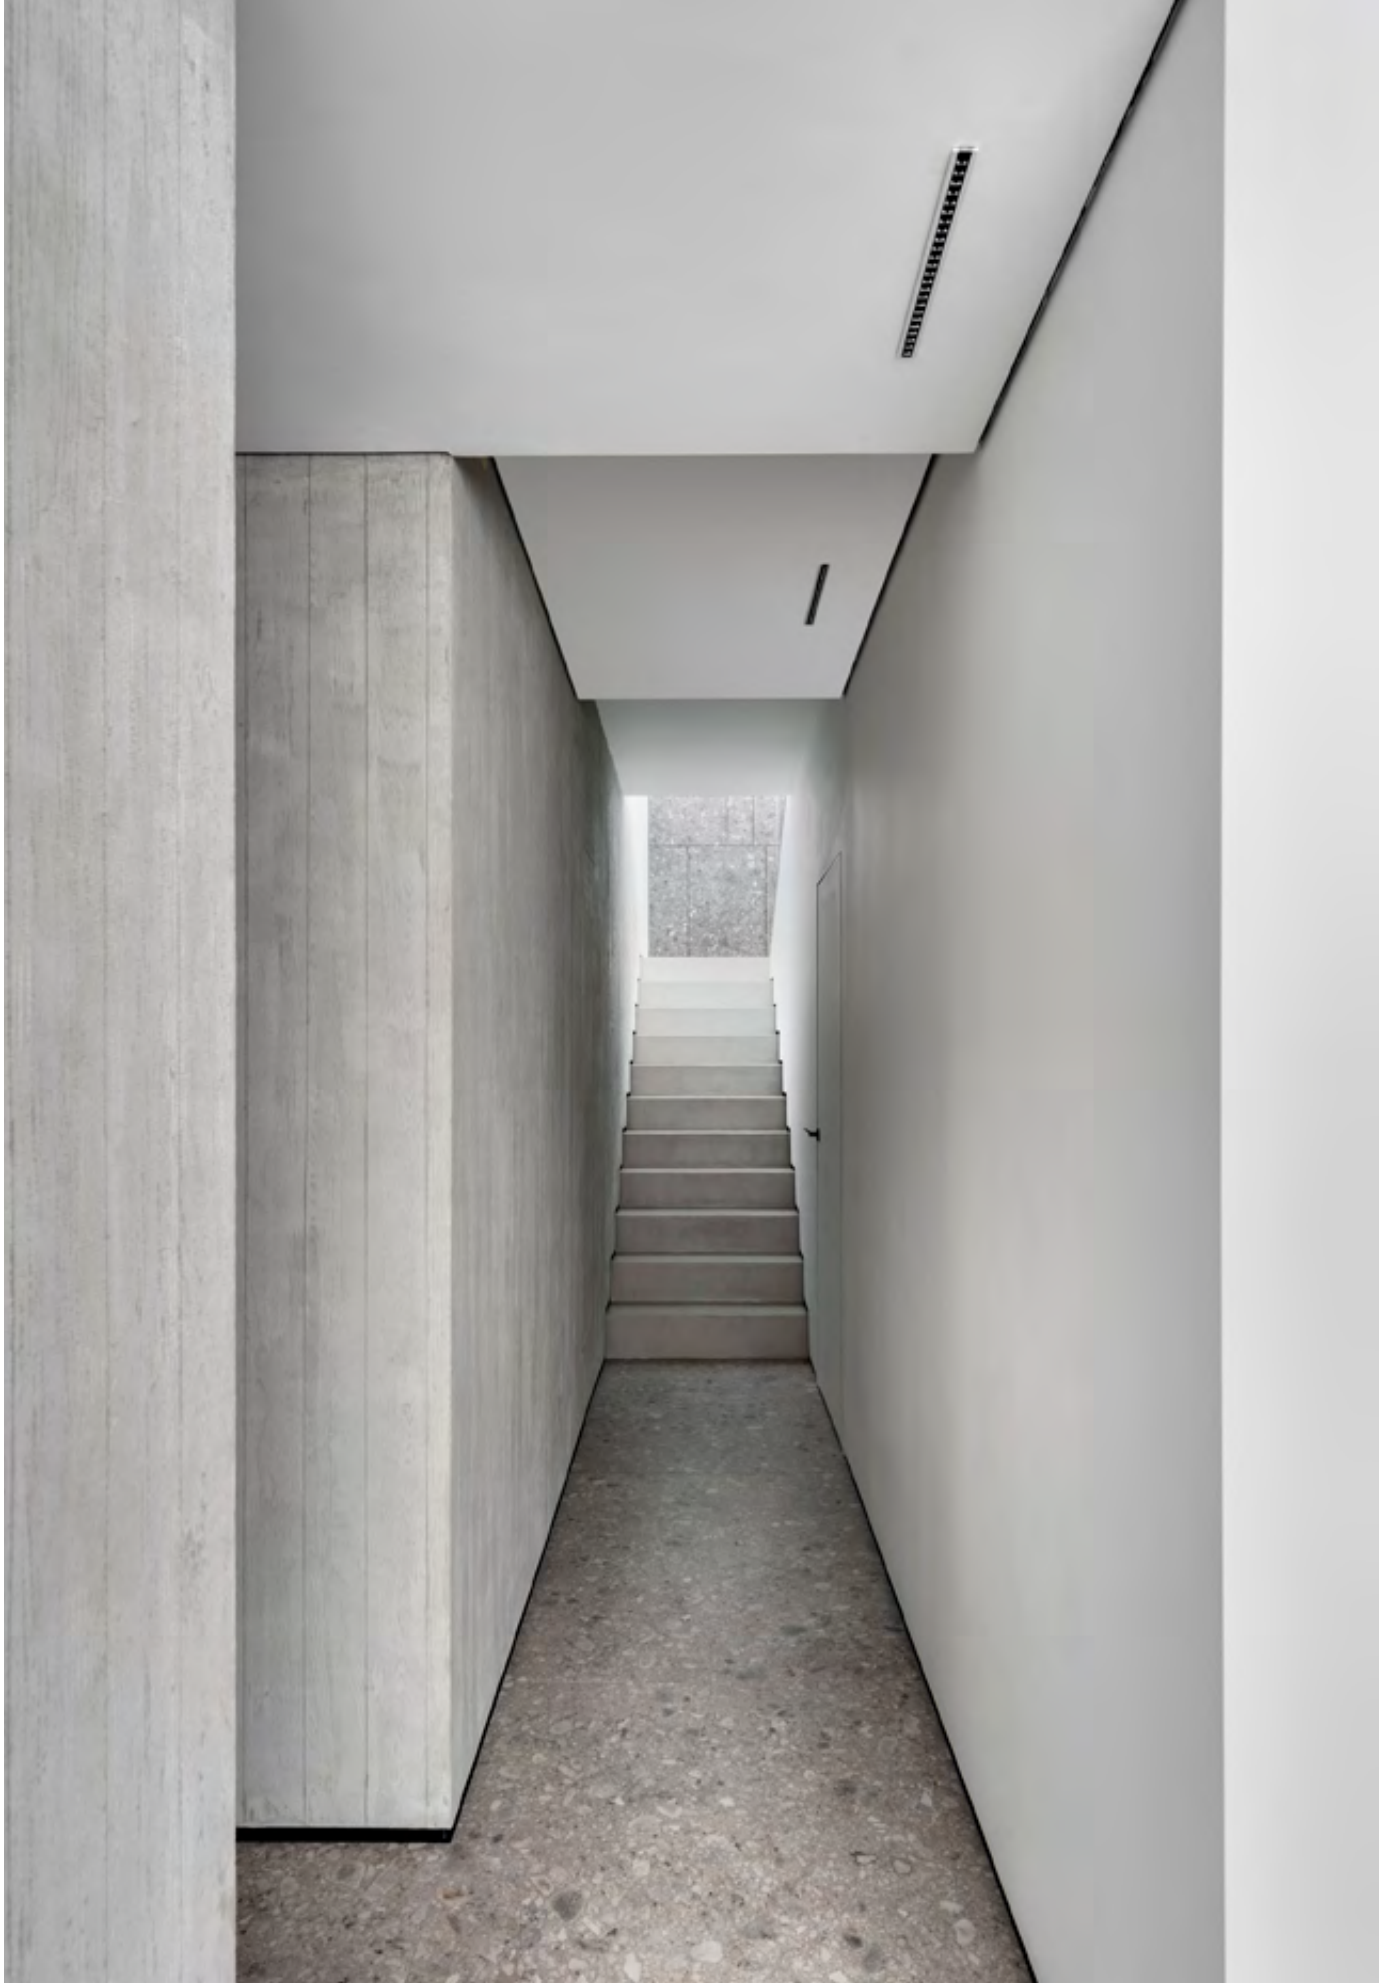




- Integrated COB LED
- Anti glare effect
- CRI 90

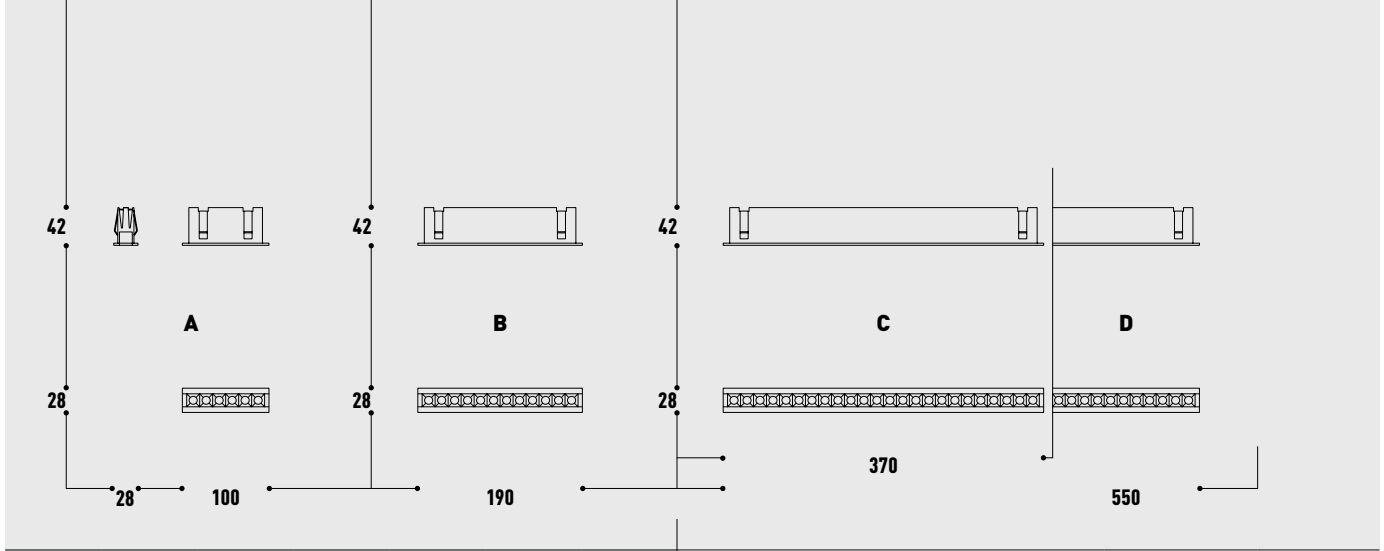


LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
CREE	450	3000	6	150	30°	92x22	A	White/black	15069
CREE	990	3000	12	350	30°	182x22	B	White/black	15070
CREE	1812	3000	24	700	30°	362x22	C	White/black	15071
CREE	2853	3000	32	1000	30°	542x22	D	White/black	15072

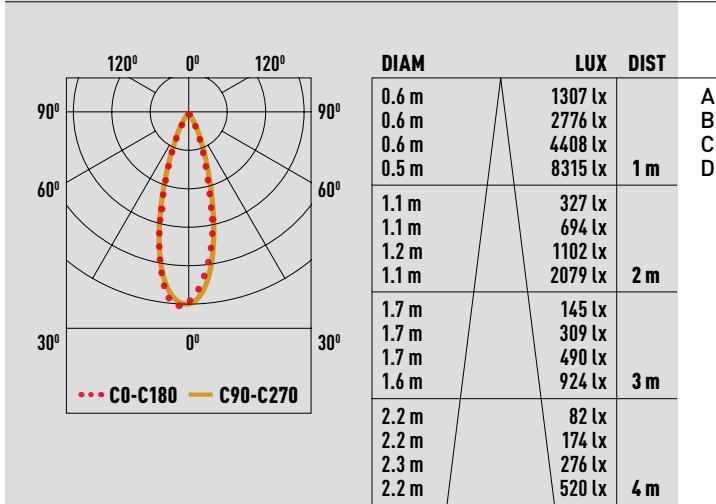

CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	31*28*20	20	0.017	7.2
B	31*28*20	20	0.017	9.3
C	40*21*20.5	20	0.017	13.8
D	59*22.5*20.5	16	0.027	15

Trimless DOTS

CREE Downlight




DOTS Trimless, a modern luminaire seamlessly melding with your ceiling for a sleek, uninterrupted look. Offering two versatile length options, DOTS Trimless provides low-glare lighting that harmonizes with any architectural setting, delivering a clean and stylish ceiling aesthetic. Plus, it boasts a high color rendering index (CRI 90), ensuring vibrant and true-to-life illumination.






- Trimless application
- Integrated COB LED
- Anti glare effect
- CRI 90

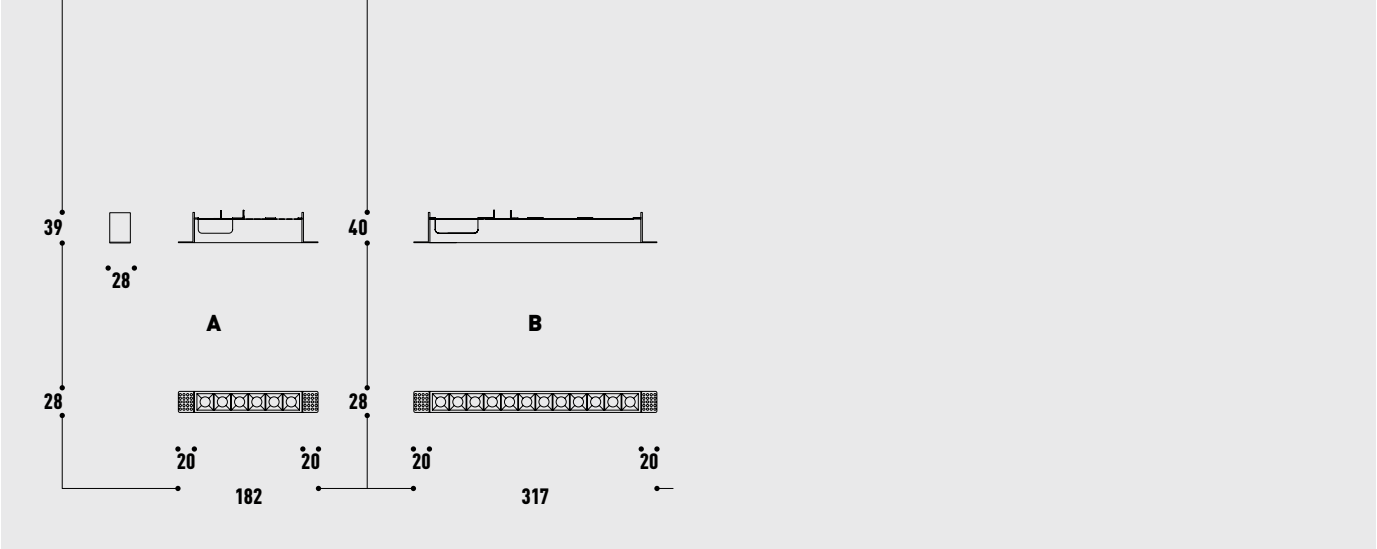


LED	lm	K	W	INPUT	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	639	3000	6	200-240V	33°	150x30	A	Black	15479
								White	15480
COB	1125	3000	12	200-240V	33°	285x30	B	Black	15481
								White	15482

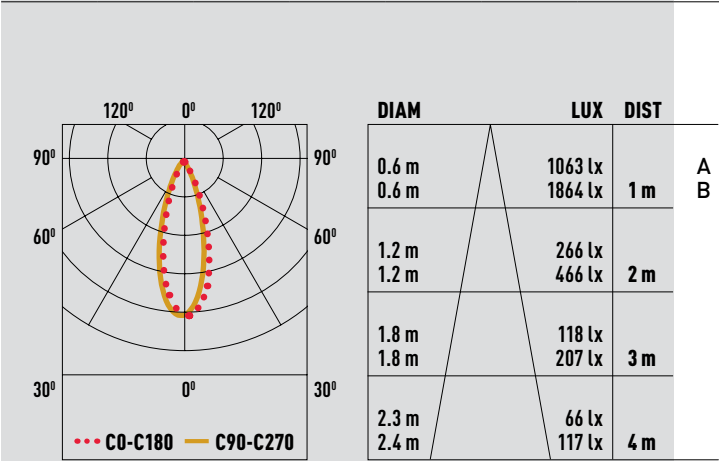


CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	30*30*23	20	0.023	7.4
B	46*34*26	30	0.041	17.4


RING DOTS

COB Downlight




Circular, seamless recessed luminaires, which provides stunning and soft illumination. RING DOTS is designed to minimise the glare for high visual comfort. The installation is simple and the family is available in three diameters: 30, 60 or 90cm.


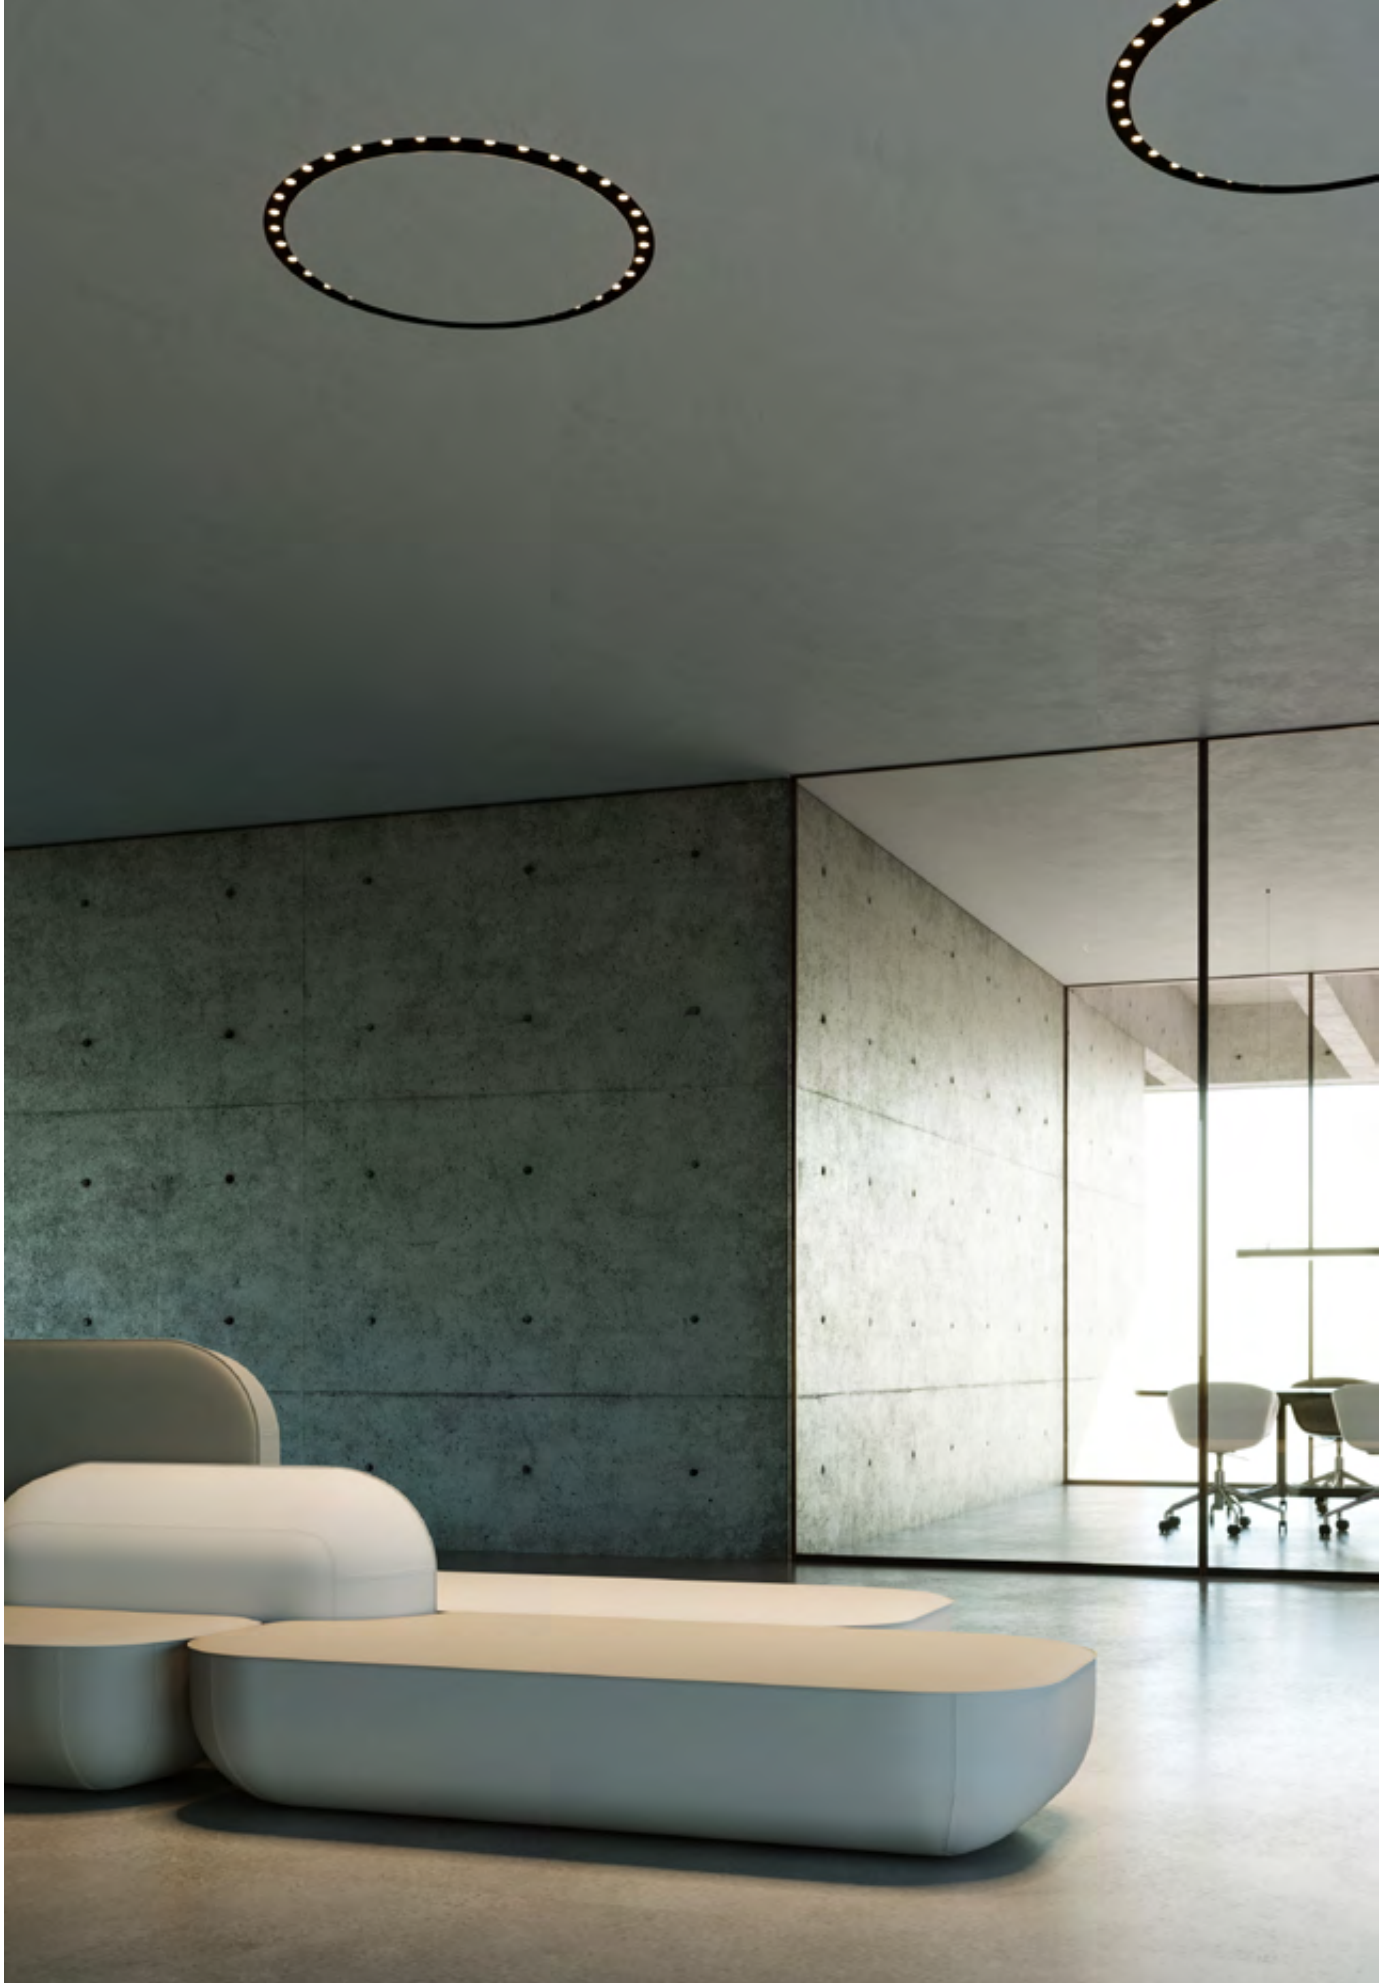


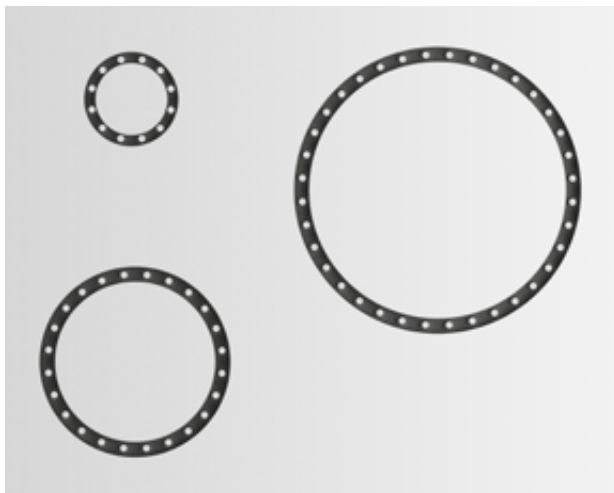

- Integrated COB LED
- Trimless frame
- TRIAC dimmable
- CRI 90

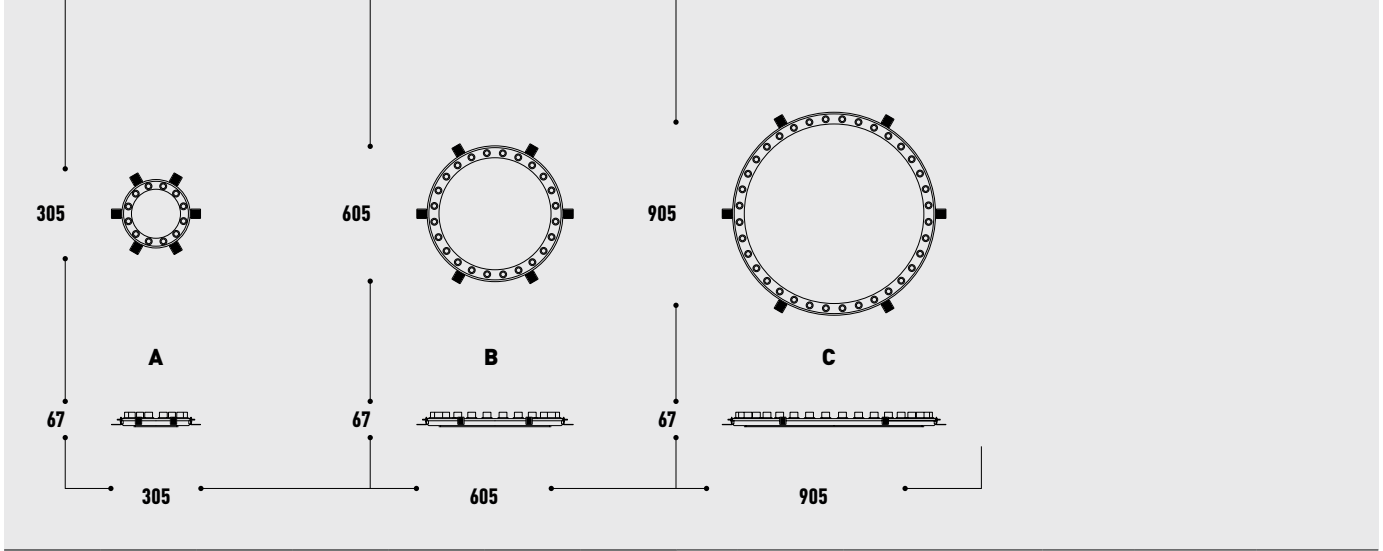

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Dimming	Colour	Item no.
LED	1152	3000	24	700	24°	310	A	TRIAC	Black	15369
LED	2400	3000	50	700	24°	610	B		Black	15309
LED	3600	3000	72	700	24°	910	C		Black	15311

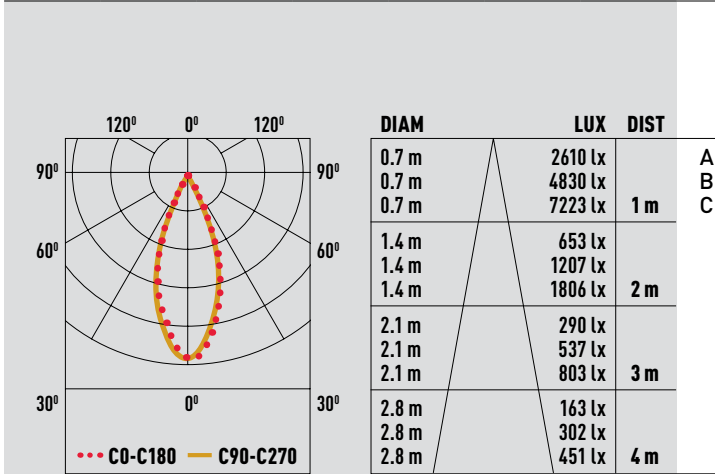

CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	38*34.5*33	5	0.043	11.5
B	63*68*7.5	1	0.032	7.5
C	97*98*7.5	1	0.071	13.5

IP54 DOWNLIGHTS

RON
TORI

COB TUBE
SMD TUBE



RON

IP54 COB Downlight

1


RON is a fine COB led waterproof downlight. This IP54 recessed spot light provides ample direct and ambient illumination by the adjustable integrated led. This collection has a TRIAC dimmable option.






- Integrated COB LED
- IP54 waterproof
- Adjustable spotlight




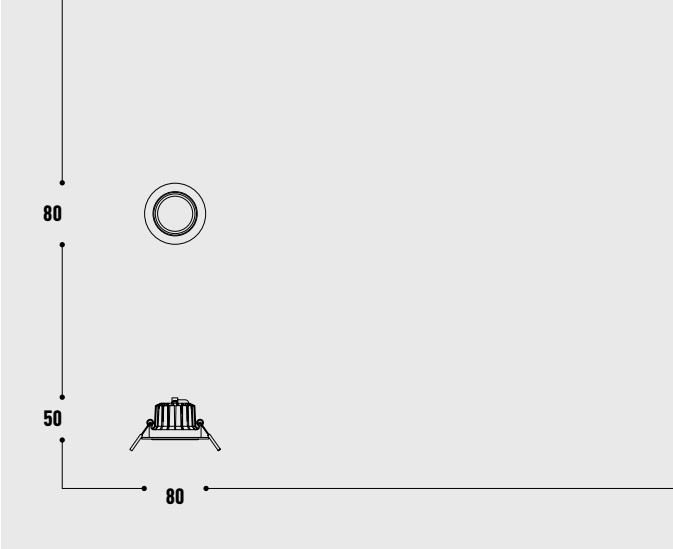

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	IP Rating	Dimming	Colour	Item no.
COB	760	3000	8	170	60°	68	•	IP54	TRIAC	White	15033
										Black	150033

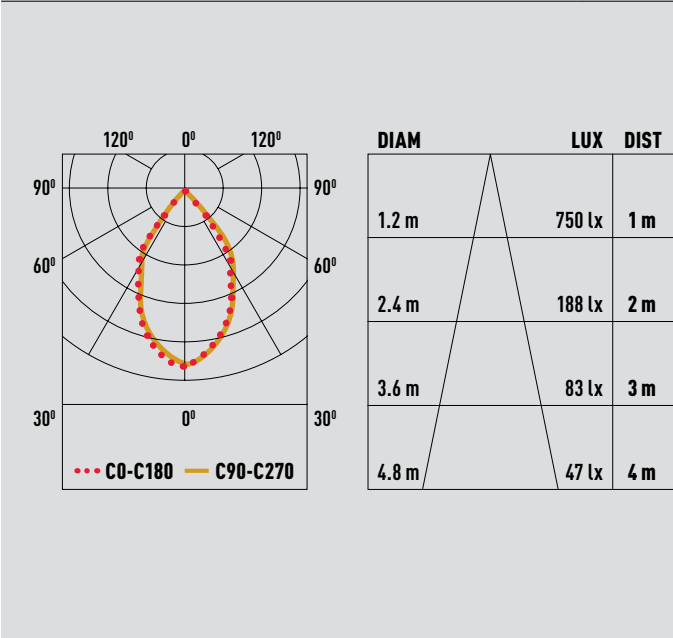

--	--	--	--	--	--	--	--	--	--	--	--

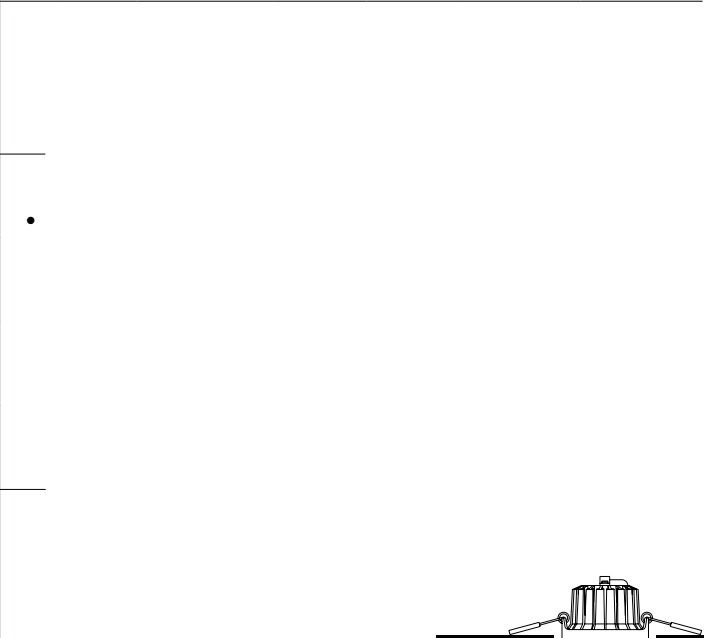

CARTON	Size (L*W*H) cm	PCS	CBM	kg
•	46*46*29.5	48	0.062	15

TORI


IP54 SMD Downlight

TORI is a refined integrated led waterproof downlight, which creates uniform light distribution in wet spaces. Three sizes and availability of models with CRI90 make it easy to adapt the luminaire to the needs of the interior.






- High quality diffuser
- Integrated SMD backlight
- IP54 waterproof

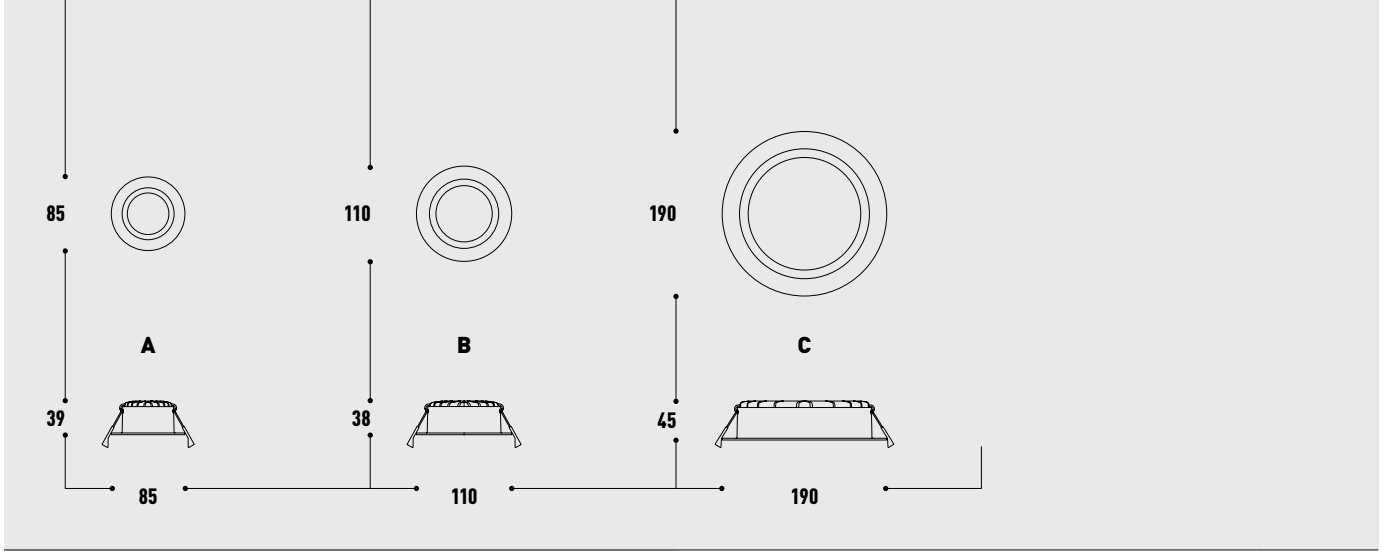

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	IP Rating	Colour	Item no.
SMD	650	3000	7	220	90°	70	A	IP54	White	15035
									Black	150355
SMD	1100	3000	13	230	90°	90	B	IP54	White	15036
									Black	150366
SMD	2600	3000	25	580	90°	160	C	IP54	White	15219
									Black	15220

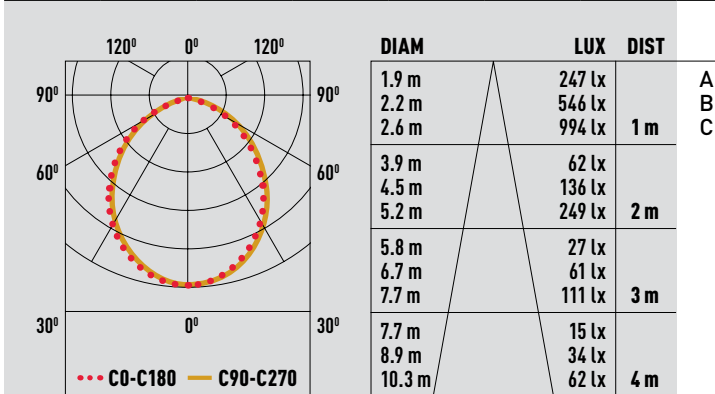

CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	57.5*57.5*20	50	0.066	13.9
B	58.5*37*29.5	36	0.064	12.3
C	46*44*40	20	0.081	15.4

COB TUBE

IP54 Surface Downlight











COB TUBE is a dimmable surface downlight which offers many different combinations. Providing two anti glare options; CONE or RING shape, it can also be used for wet spaces. Variety of finishes for inserts and housings allows to get interesting compositions that fit into any interior.





- | COB TUBE | IP54 Surface Downlight |

OPTIONS

<div> <div>  Total White 15301 </div> <div>  Total Black 15302 </div> </div>		
 White* 15303	 Black* 15304	 Gold* 15305
 White* 15306	 Black* 15307	 Gold* 15308

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	IP Rating	Dimming
COB	655	3000	8	200	24°	-	•	IP54	TRIAC


Beam spread diagram showing the distribution of light from two different beam types: CO-C180 (red dotted line) and C90-C270 (yellow solid line). The diagram is a polar plot with angles marked at 120°, 0°, and 120° horizontally, and 90°, 60°, and 30° vertically. The CO-C180 beam is wider, while the C90-C270 beam is narrower and more focused.

Legend: ●●● CO-C180 — C90-C270

DIAM	LUX	DIST	
0.4 m	3186 lx	1 m	•
0.8 m	796 lx	2 m	
1.2 m	354 lx	3 m	
1.6 m	199 lx	4 m	



CARTON	Size (L*W*H) cm	PCS	CBM	kg
•	50x40x21	40	0.04	15.8




* not included

SMD TUBE




IP54 Surface Downlight


SMD TUBE is a surface light, with a minimalist painted aluminium cylinder that comes in 3 different finishes. This IP54 surface mounted family is built with SMD backlight. All 3 Sizes come with high quality diffusers that spread soft and bright light to the space. It can also be used for wet spaces.

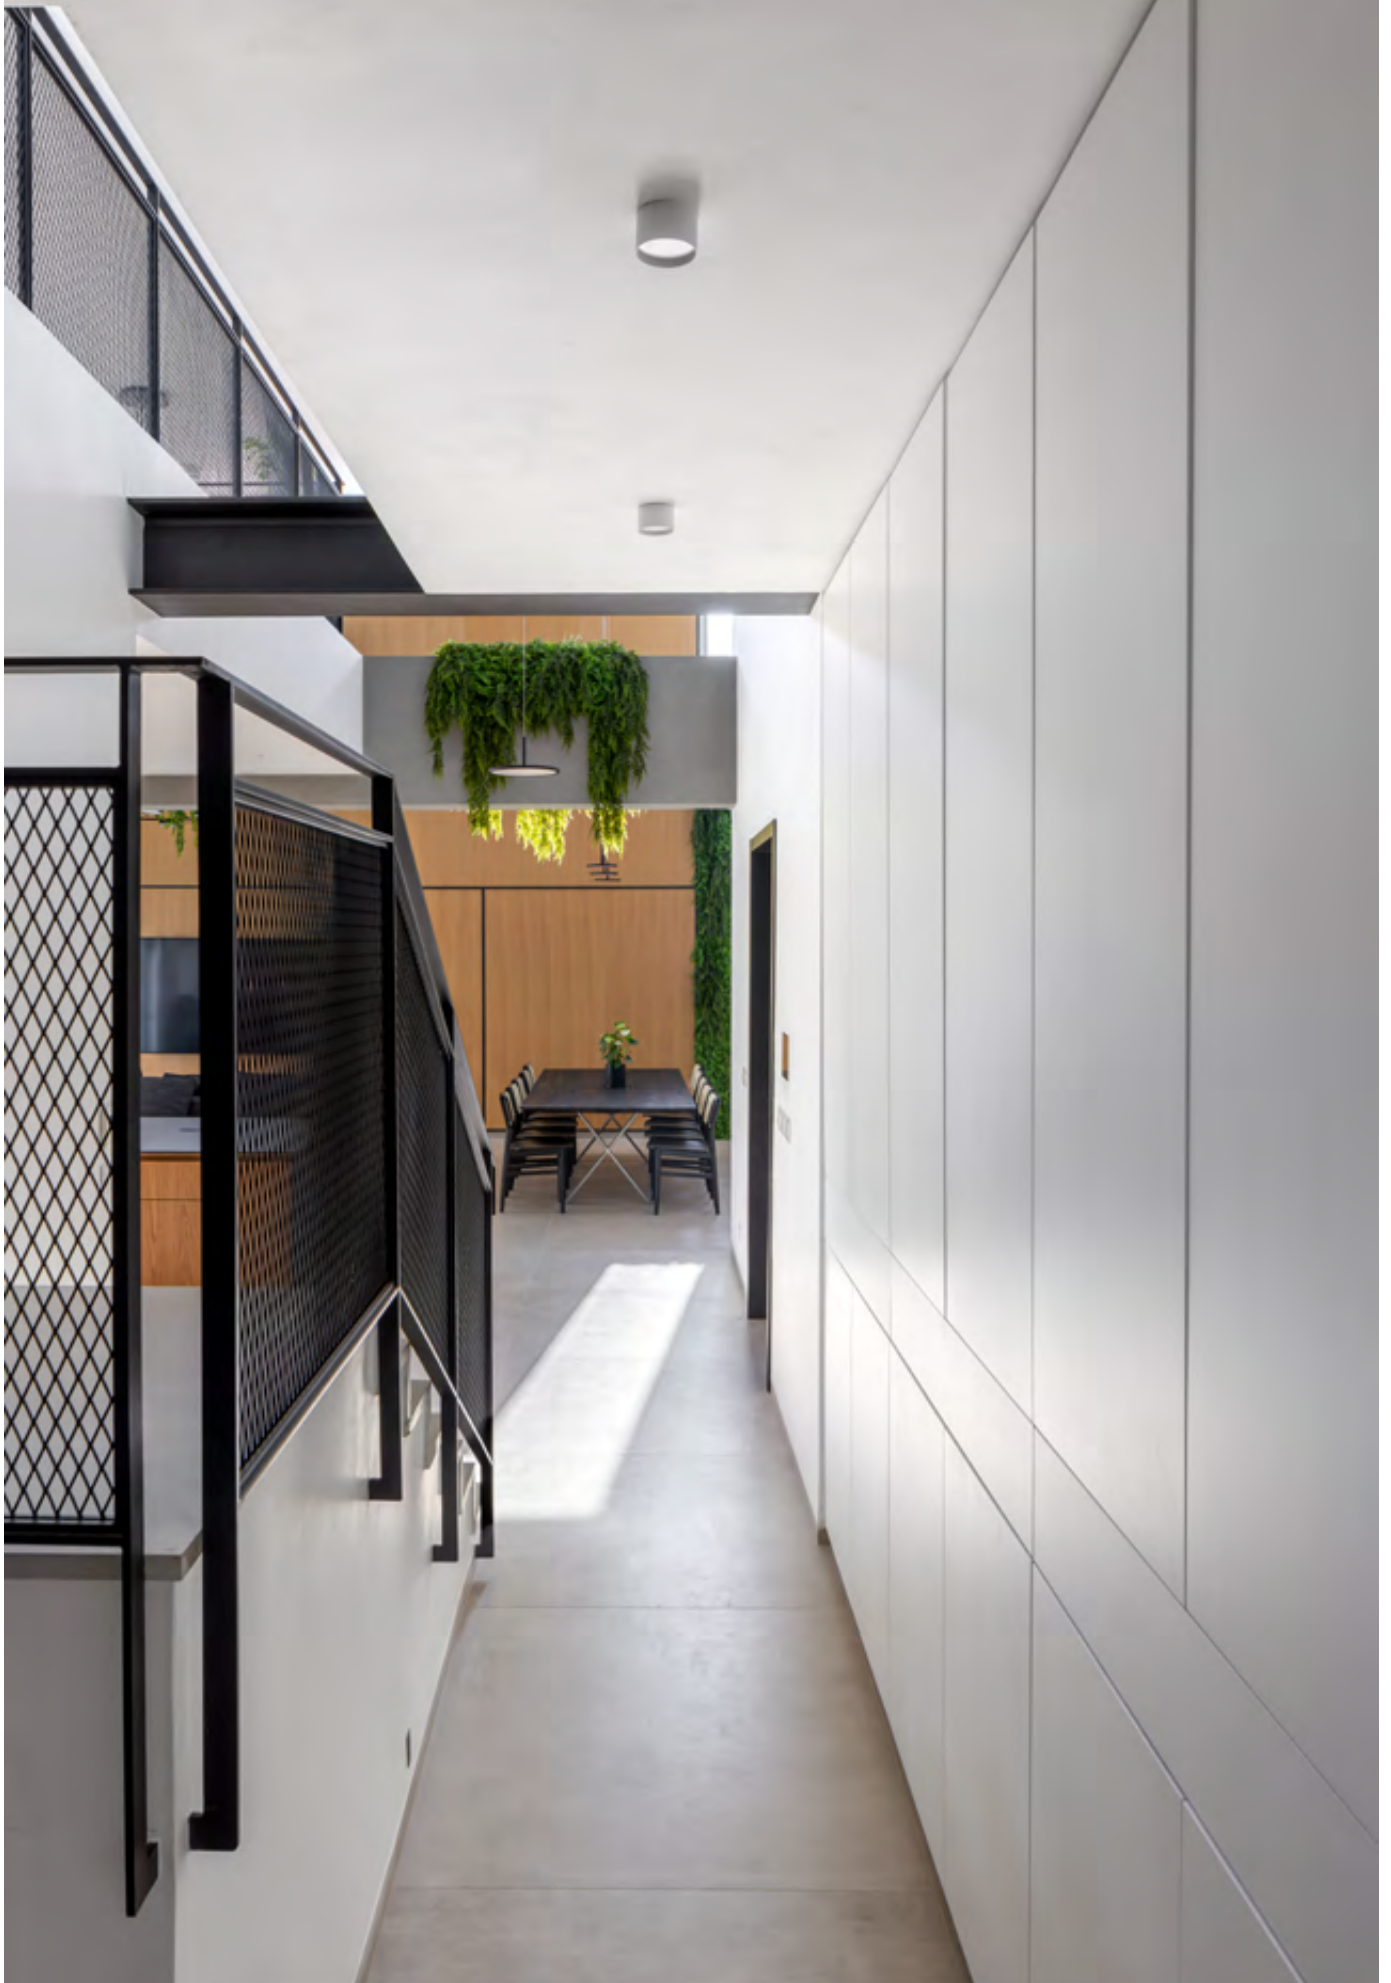




- High quality diffuser
- Integrated SMD backlight
- IP54 waterproof
- Aluminum body

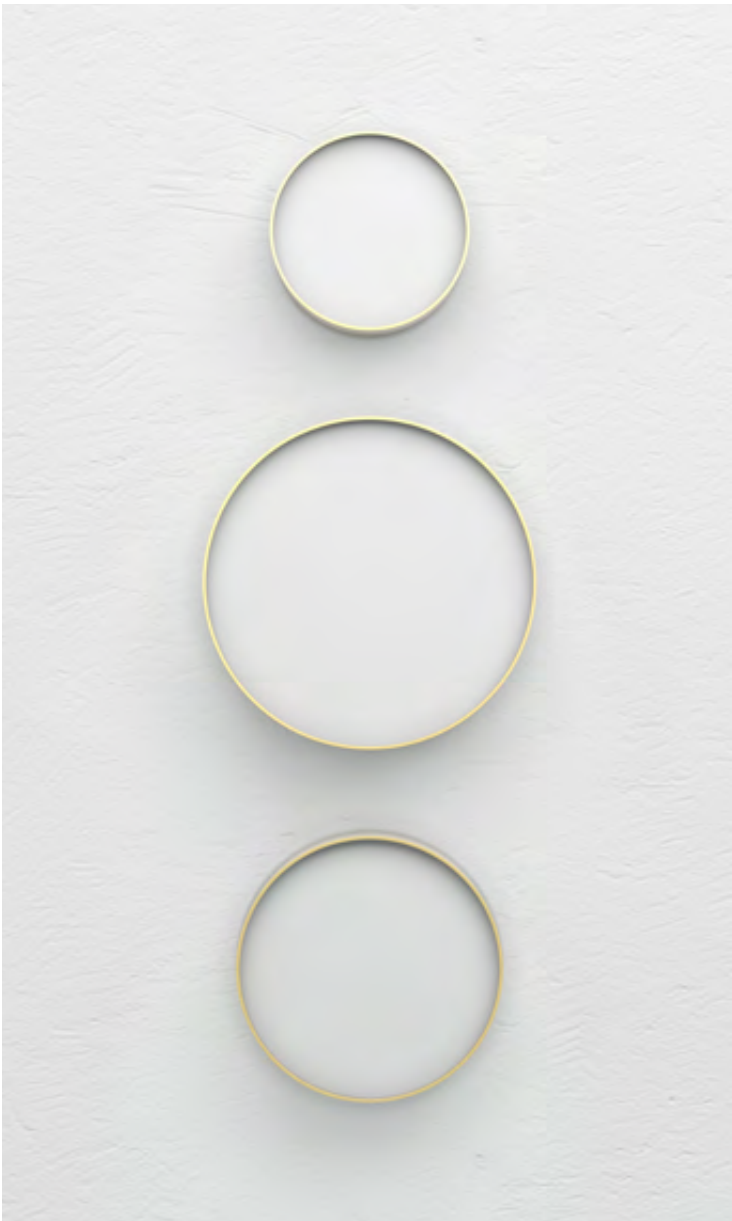

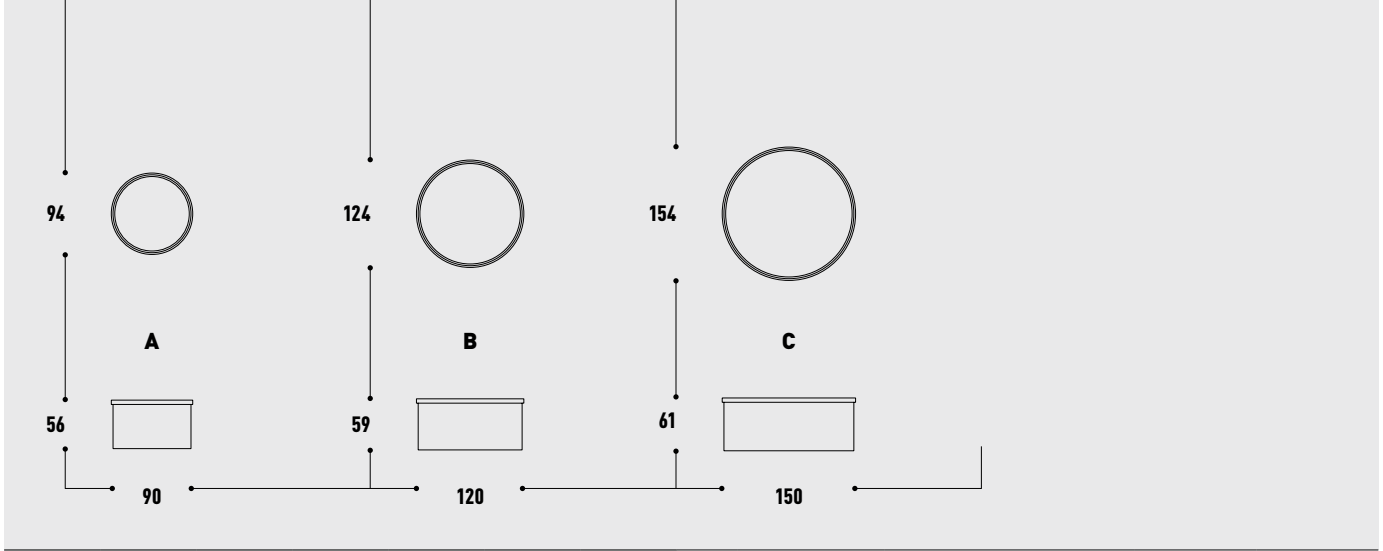

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	IP Rating	Colour	Item no.
SMD	900	3000	10	250	90°	-	A	IP54	White	15080
									Black	15081
									Gold	15082
SMD	1200	3000	15	400	90°	-	B	IP54	White	15083
									Black	15084
									Gold	15085
SMD	1700	3000	20	550	90°	-	C	IP54	White	15086
									Black	15087
									Gold	15088

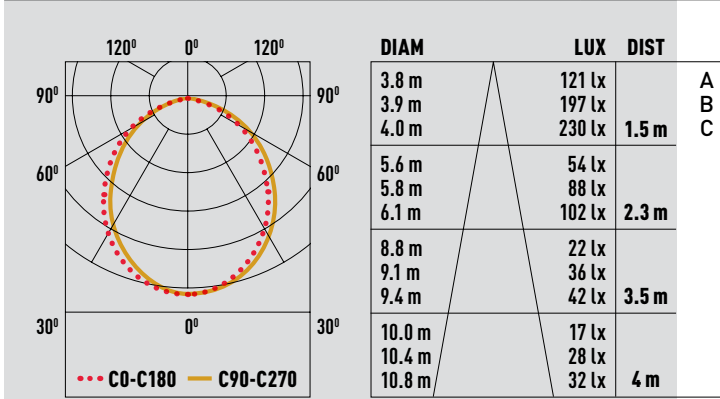

CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	53.5*22*38	50	0.04	18.5
B	68*28*32.5	40	0.06	19.6
C	34*34*40	20	0.04	15.4

SPOT LIGHTS

TOMI
TORRES

TUBE



TOMI




SPOT Light


TOMI is a discreet adjustable spotlight available in both recessed and surface – mounted versions. The body is built from a painted aluminium cylinder Ø7,5cm or Ø9,5cm. Offering a wide range of options, optics and accessories, the product provides ample direct and ambient illumination with excellent colour rendering index.






- Integrated COB LED
- Wide range of accessories
- Adjustable spotlight
- TRIAC dimmable
- CRI 90

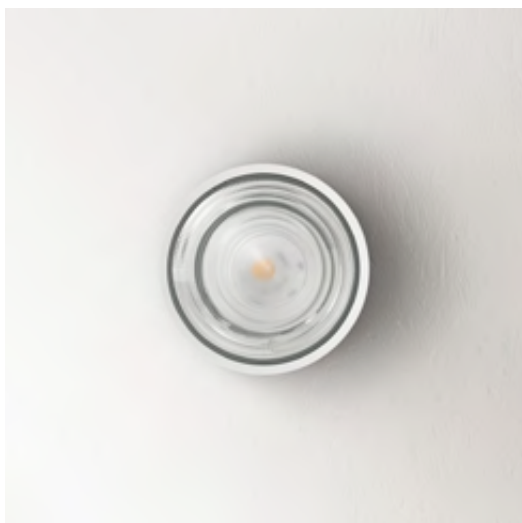

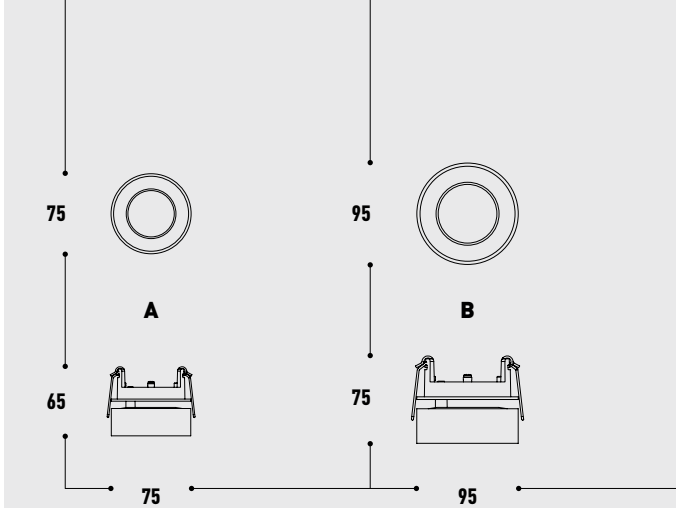



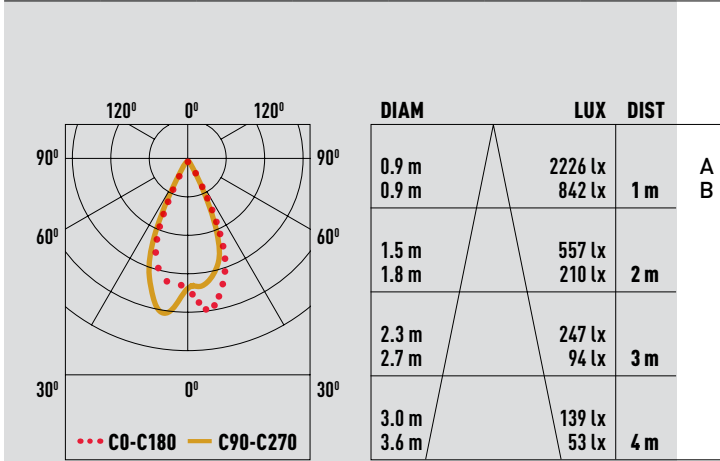










LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Dimming
COB	590	3000	9	700	45°	75	A	TRIAC
COB	1280	3000	13	350	38°	88	B	TRIAC



OPTIONS

A			
			
Total White 15066		Total Black 15067	
			
Gold* 15348	Rose Gold* 15350	Chrome* 15352	White* 15354
B			
			
Total White 15063		Total Black 15064	
			
Gold* 15347	Rose Gold* 15349	Chrome* 15351	White* 15353


* not included




CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	59.5*23*17.5	20	0.024	6.9
B	55*31*23	20	0.039	10





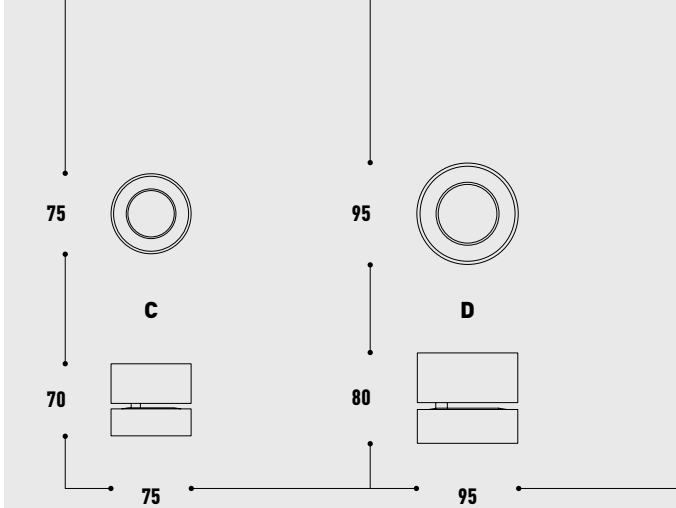



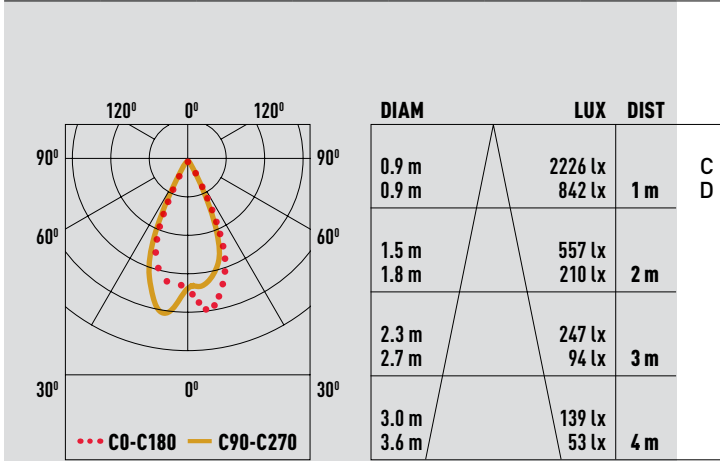





- Integrated COB LED
- Wide range of accessories
- Adjustable spotlight
- TRIAC dimmable
- CRI 90




LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Dimming
COB	590	3000	9	700	45°	-	C	TRIAC
COB	1280	3000	13	350	38°	-	D	TRIAC



OPTIONS

C  			
 Gold* 15348	 Rose Gold* 15350	 Chrome* 15352	 White* 15354
D  			
 Gold* 15347	 Rose Gold* 15349	 Chrome* 15351	 White* 15353

* not included

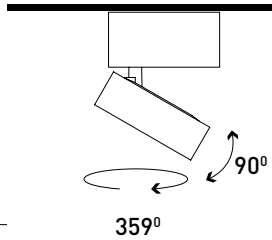


CARTON	Size (L*W*H) cm	PCS	CBM	kg
C	42*18*17.5	20	0.016	7.1
D	54.5*23*20.5	20	0.029	9.4

TORRES




SPOT Light

Recessed or surface spotlight with rotatable and swivable head - elegance and flexibility combined. Its body is built from a painted minimal aluminium cylinder. This spot light provides ample direct and ambient illumination. It is suitable for professional use that requires very good color rendering.


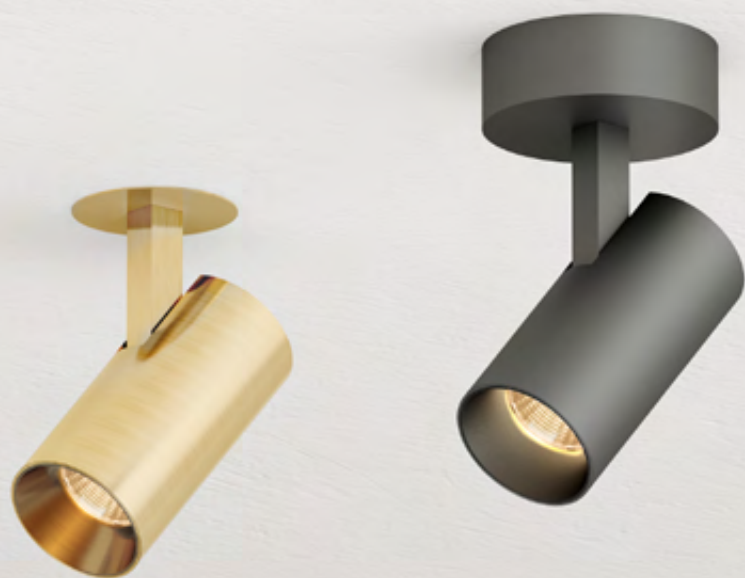




- Integrated COB LED
- Adjustable spotlight
- TRIAC dimmable
- CRI 90

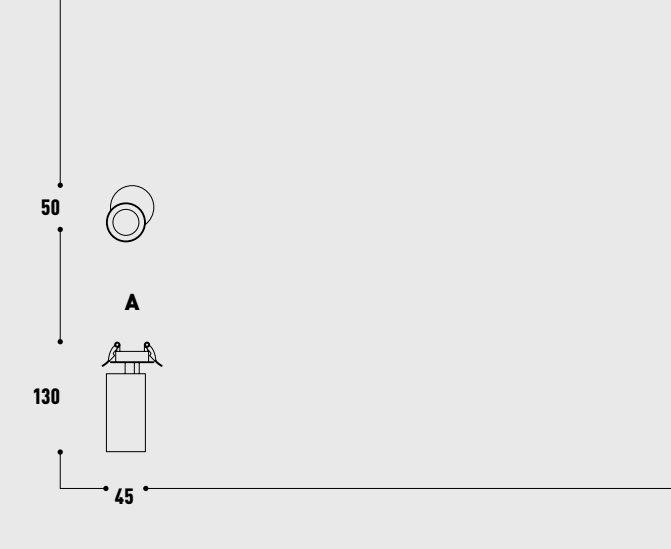

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	610	3000	7	180	24°	45	A	White	15037
								Black	15038
								Gold	15039

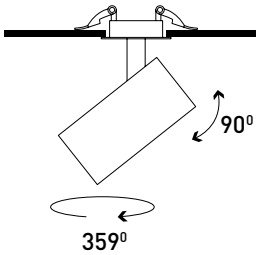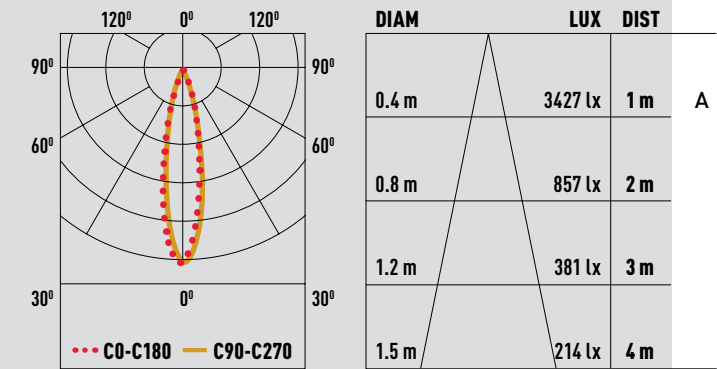


CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	37*22.5*30	30	0.025	8.6





- Integrated COB LED
- Adjustable spotlight
- TRIAC dimmable
- CRI 90



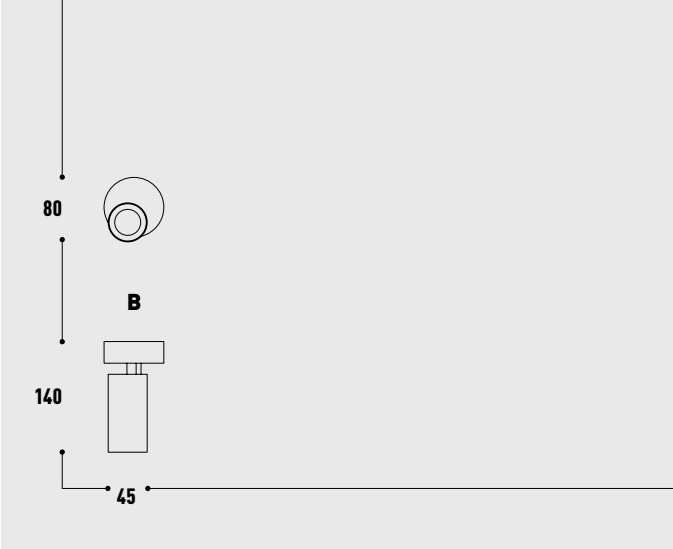


LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	610	3000	7	180	24°	-	B	White	15040
								Black	15041

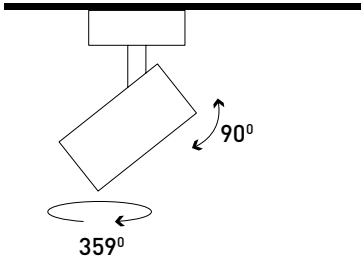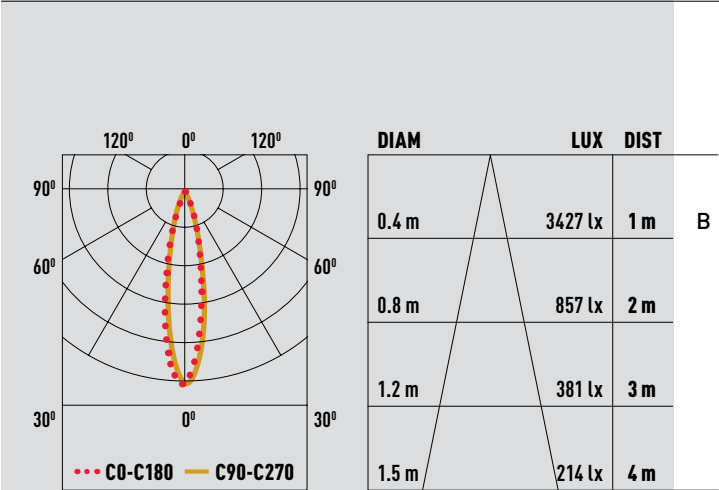

CARTON	Size (L*W*H) cm	PCS	CBM	kg
B	35*35*35	50	0.043	14.2

TUBE




SPOT Light

Tube is a minimal, ceiling-recessed spot light characterised by its trimless design. This spot light provides ample direct and ambient illumination by the adjustable head. Available in two different sizes all models have a high color rendering index – CRI90.







- Integrated COB LED
- Adjustable spotlight
- Trimless frame
- CRI 90

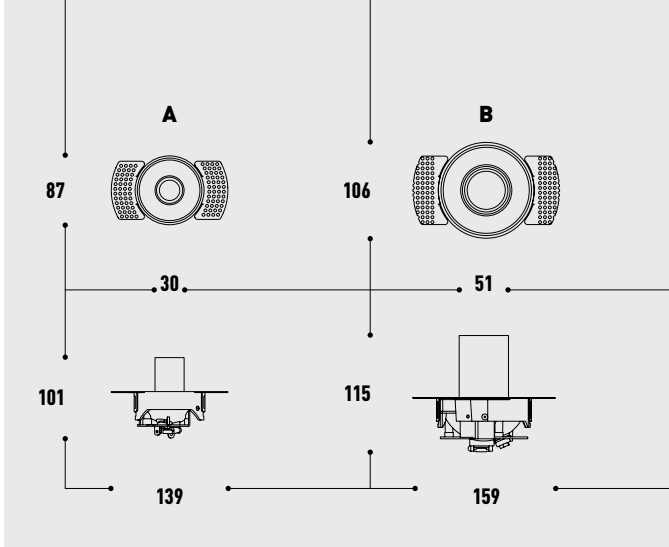

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	676	3000	7	700	30°	90	A	White/black	15372
COB	1095	3000	13	350	30°	110	B	White/black	15373

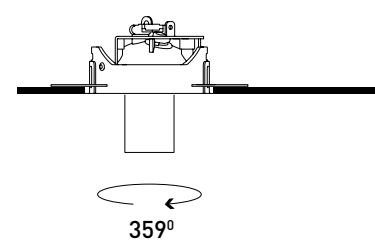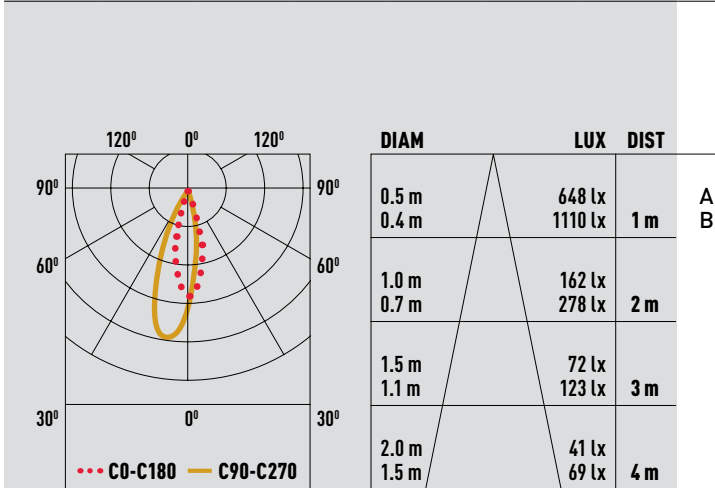

CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	49.5*28*24.5	20	0.034	4.8
B	62*33*27.5	20	0.056	11.1

STEP LIGHTS

MINI LINE

MINI DROP

MINI SQUARE





MINI STEP


STEP Light

MINI STEP family is a minimal collection, built with a painted aluminum body integrated with 4W COB led light. MINI STEP is a fine wall recessed night light.





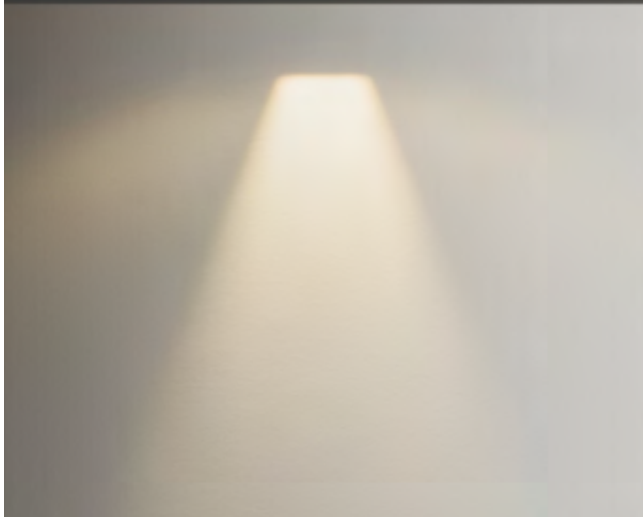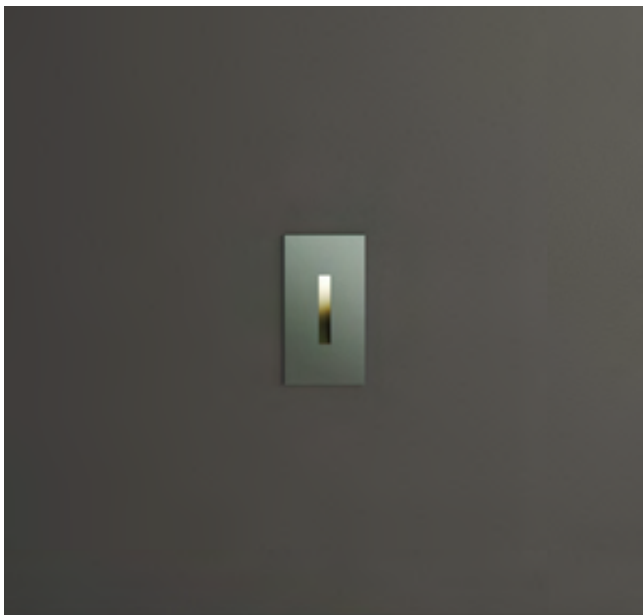



- Concrete box included
- Easy installation
- Various light effects

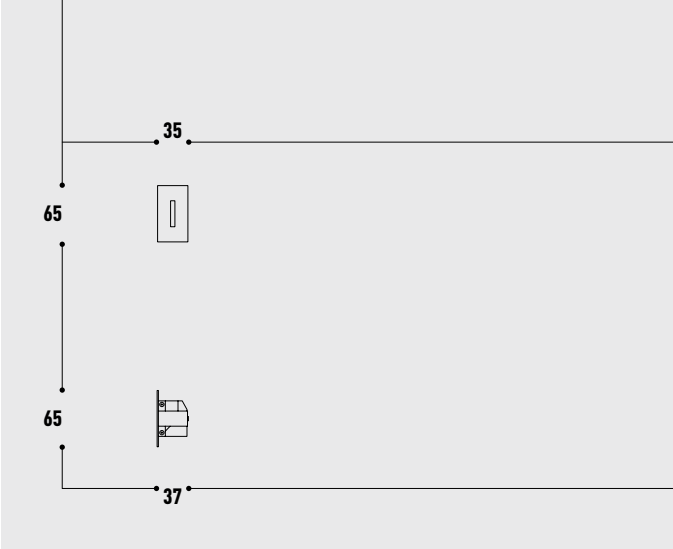


LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	380	3000	4	700	100°	20x55	A	White	15060
								Black	150600

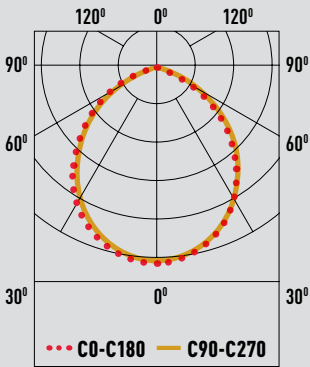




CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	55*23*36.5	50	0.046	11.5

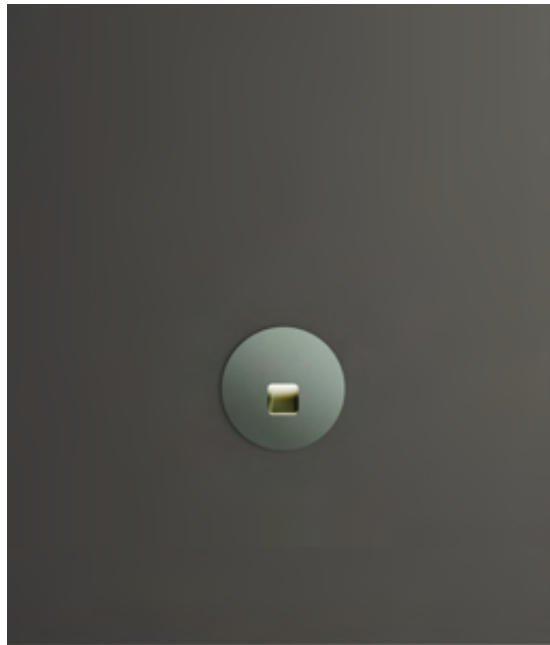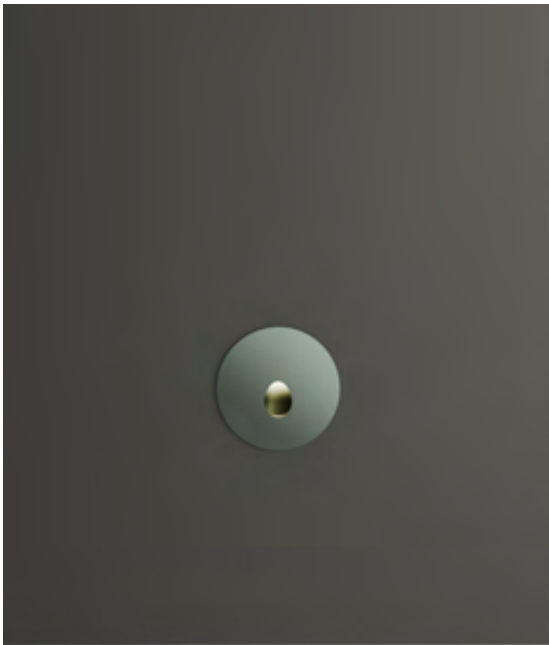

- Concrete box included
- Easy installation
- Various light effects

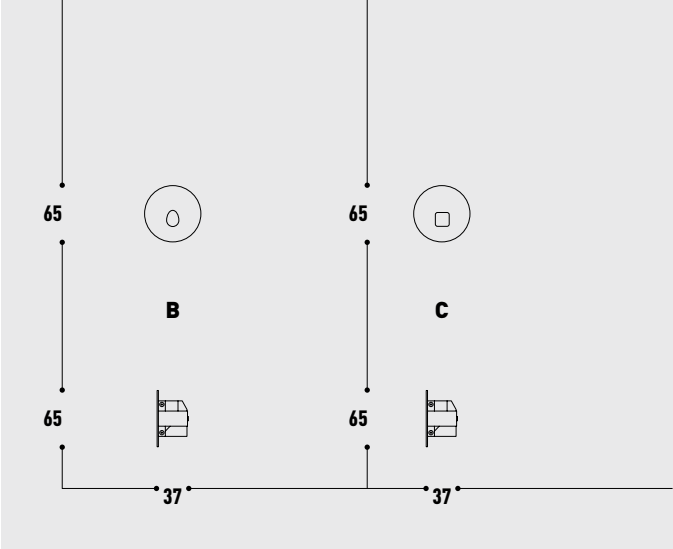

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	380	3000	4	700	100°	20x55	B	White	15061
								Black	150611
COB	380	3000	4	700	100°	20x55	C	White	15062
								Black	150622

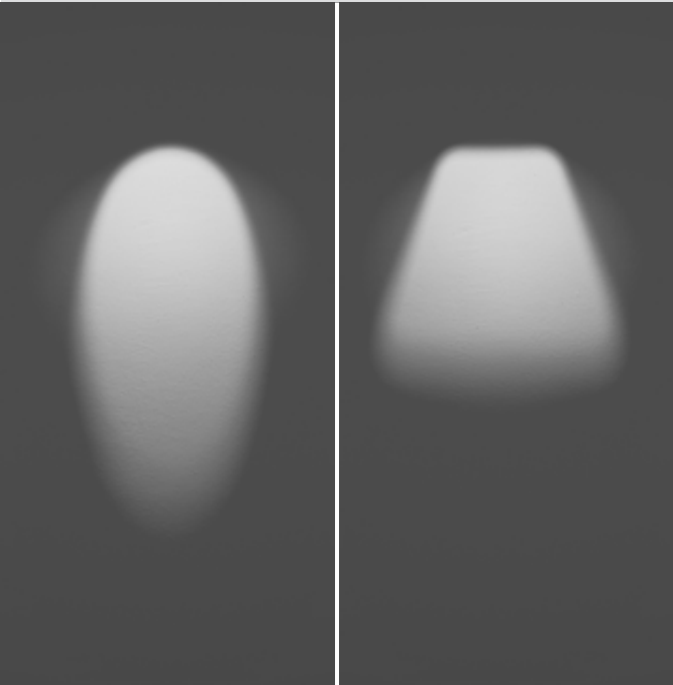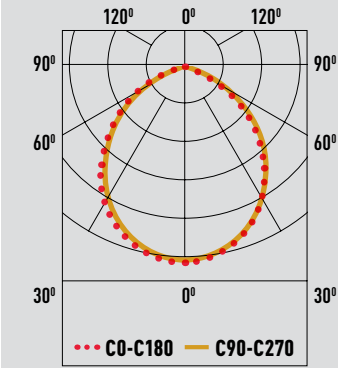

CARTON	Size (L*W*H) cm	PCS	CBM	kg
B	55*23*36.5	50	0.046	11.5
C	55*23*36.5	50	0.046	11.5

WALL LIGHTS

NICK

NOVA


NOVA Recessed

VENTO

VENTO Reading




NICK



COB Reading Light


NICK is a contemporary interpretation of a classic gooseneck task light. It features a flexible mat black silicone arm which offers a comfortable experience. Its base is equipped with a minimalist switch. A versatile light for every day use in both domestic and commercial settings.

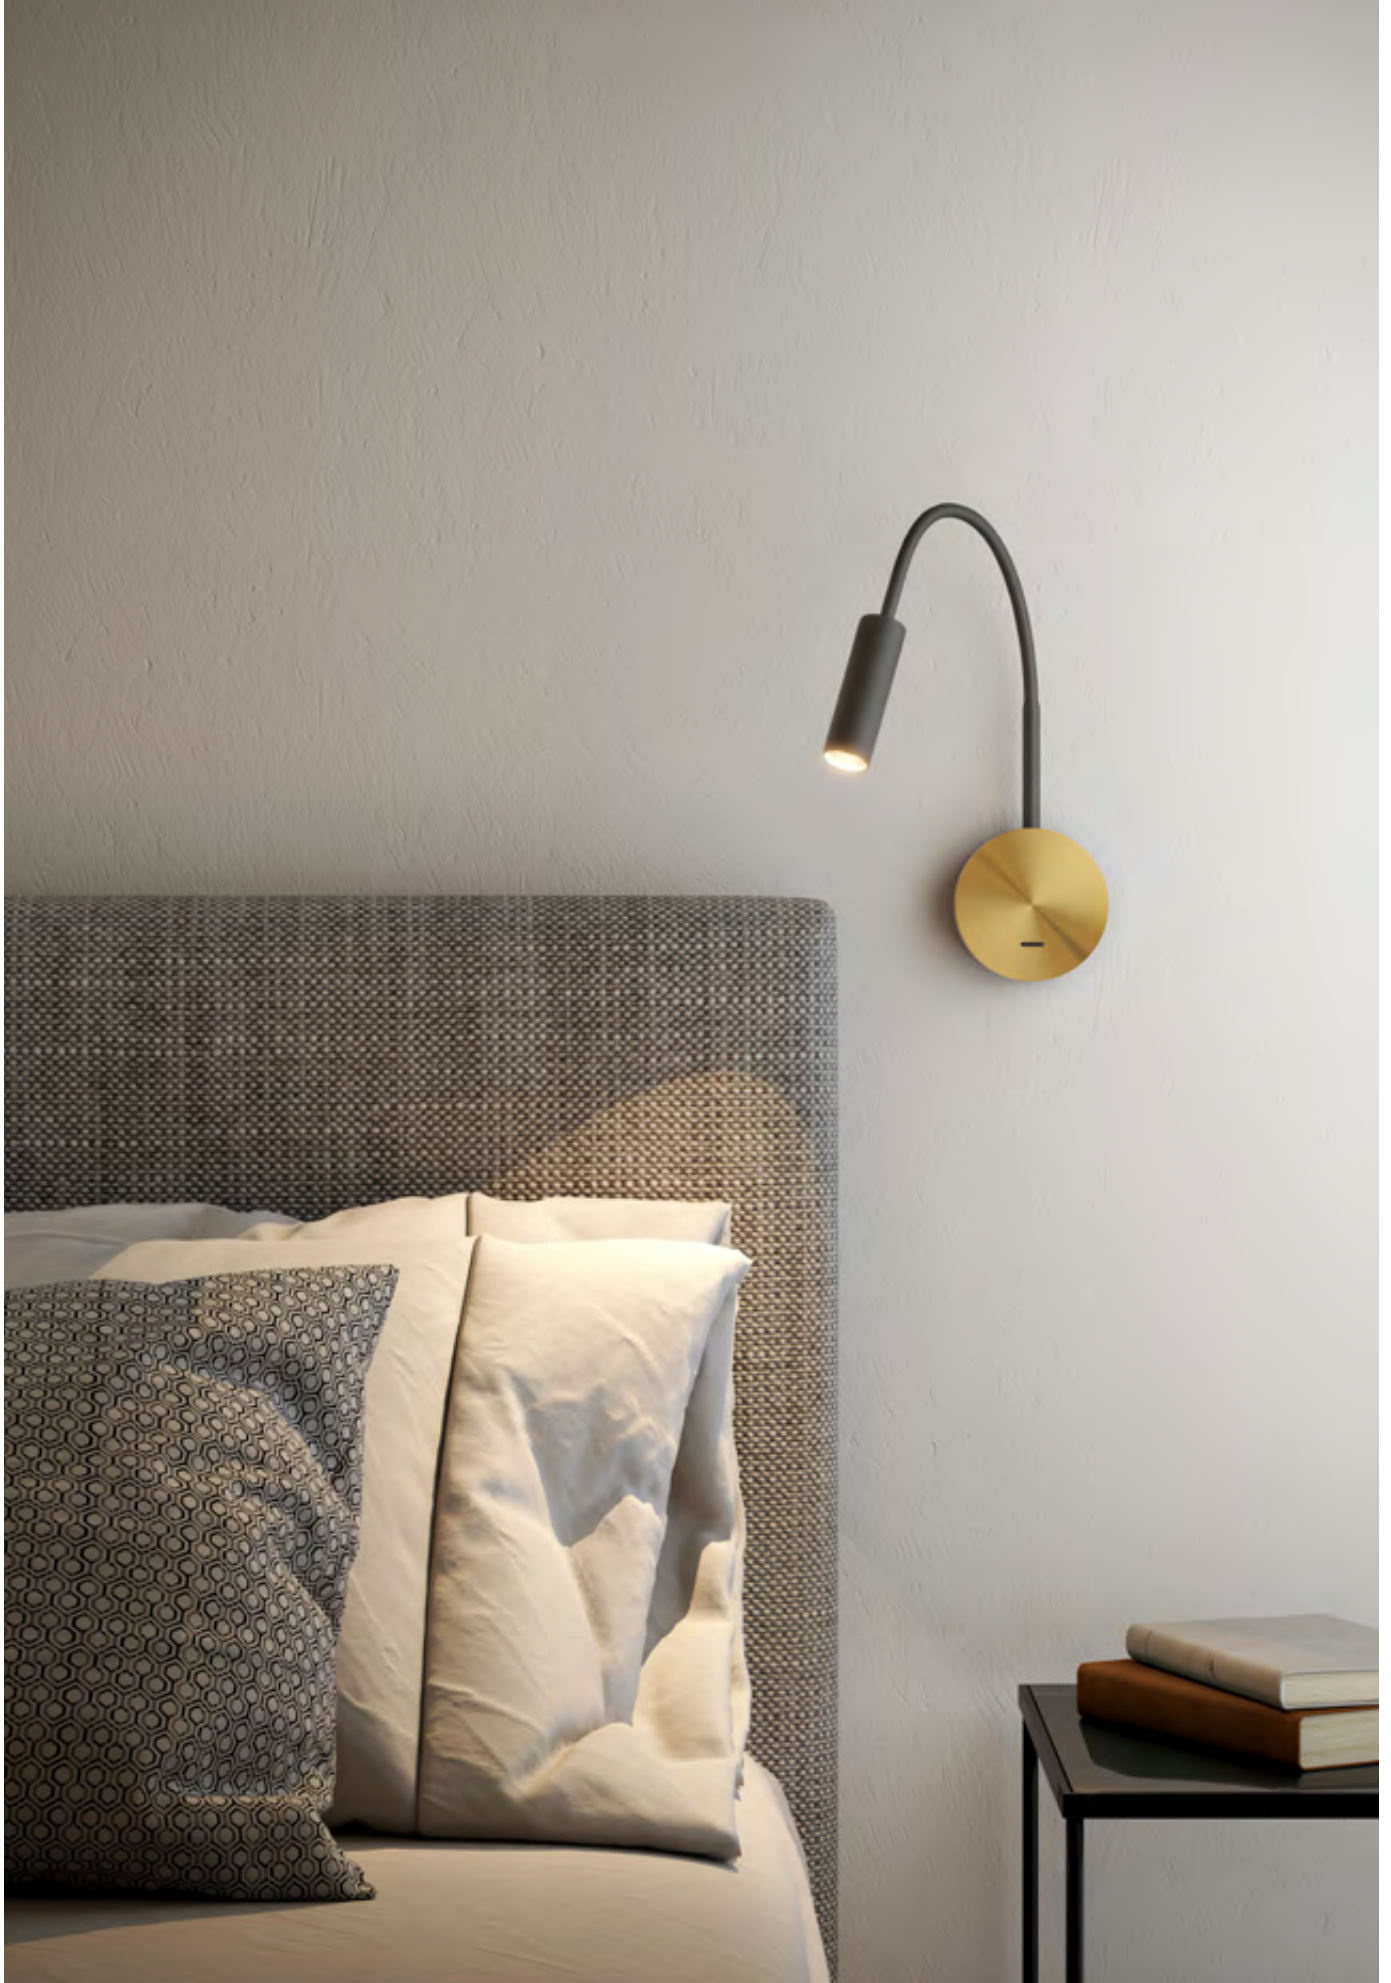





- Wall luminaire
- Integrated COB LED
- Adjustable spotlight
- On/off switch
- Aluminum body
- Mechanical magnet light cover



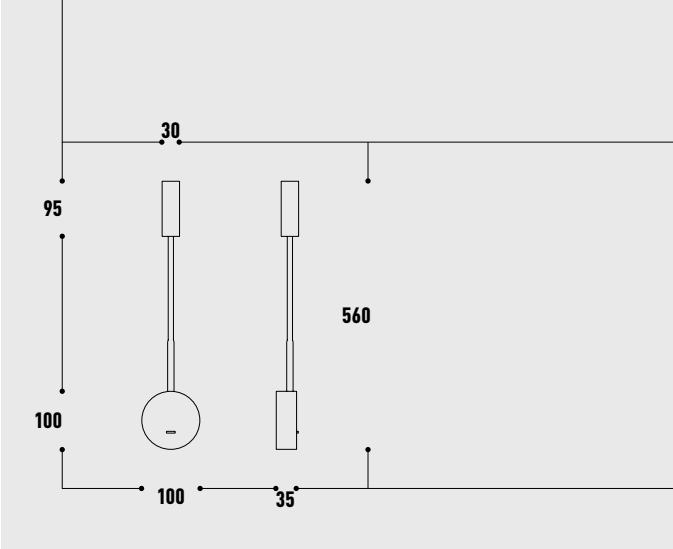

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	315	3000	3	700	50°	-	•	White	15137
								Black	15138
								Black/gold	15139

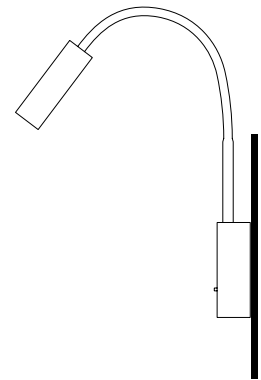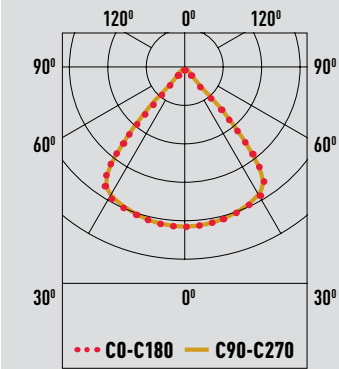

CARTON	Size (L*W*H) cm	PCS	CBM	kg
•	60*32*36	20	0.07	15.1

NOVA




COB Reading Light

Clean-lined and crisp, this wall-mounted reading light features an adjustable head, which makes it ideal for bedsides where a space-saving design is needed. Its base is equipped with a minimalist switch. A perfect bedside luminaire in the bedroom or in the hotel.







- Wall luminaire
- Integrated COB LED
- Adjustable spotlight
- On/off switch
- Aluminum body
- Mechanical magnet light cover

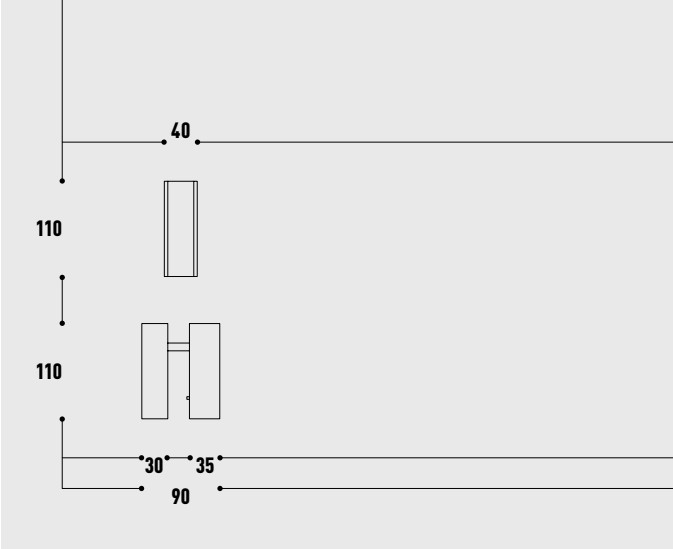

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	315	3000	3	700	50°	-	•	White	15130
								Black	15131
								Black/gold	15132

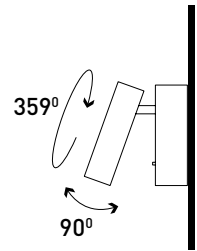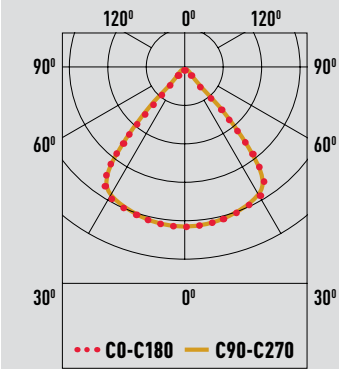

CARTON	Size (L*W*H) cm	PCS	CBM	kg
•	36*28.5*25.5	20	0.026	10.5

NOVA Recessed




COB Reading Light

Nova Recessed brings the streamlined functionality of its surface-mounted sibling into a recessed design, offering a discreet lighting solution. With an adjustable head, it provides precise illumination for reading, making it an elegant and practical choice for bedrooms and hotel spaces.







- Wall luminaire
- Integrated COB LED
- Adjustable spotlight
- On/off switch
- Aluminum body
- Mechanical magnet light cover

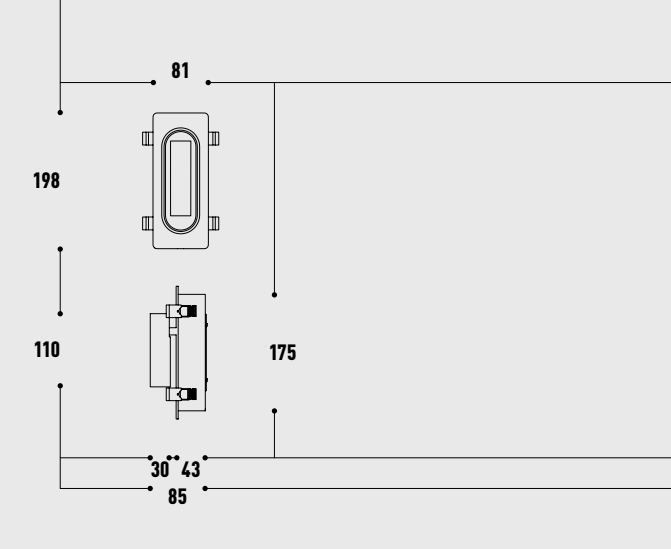

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	315	3000	3	700	45°	62x180	•	White	15395
								Black	15396
								White/gold	15397

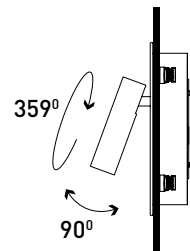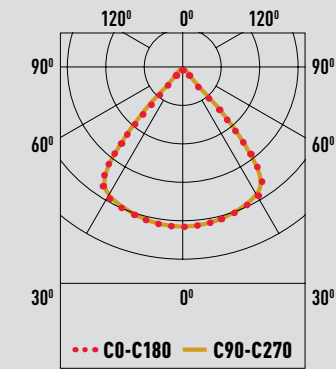

CARTON	Size (L*W*H) cm	PCS	CBM	kg
•	55*45*21	20	0.052	12

VENTO

WALL Light




VENTO, crafted with clean lines and curves, features a glass shade that softly diffuses light. The sphere-shaped lampshade is supported by a base available in gold, black, and white finishes. Its versatile charm effortlessly suits any type of indoor space – whether wet or not – including bedrooms, living rooms, dining areas, and bathrooms.







- Wall luminaire
- Integrated COB LED
- Aluminum body

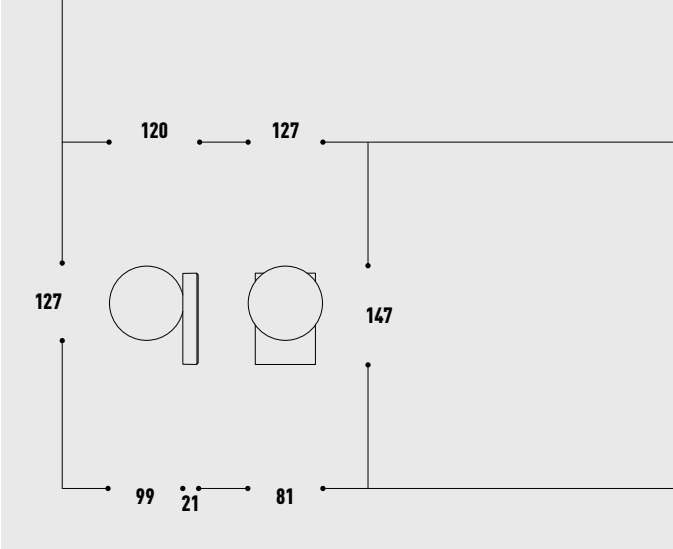

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	243	3000	4	-	-	-	•	White	15476
								Black	15477
								Gold	15478

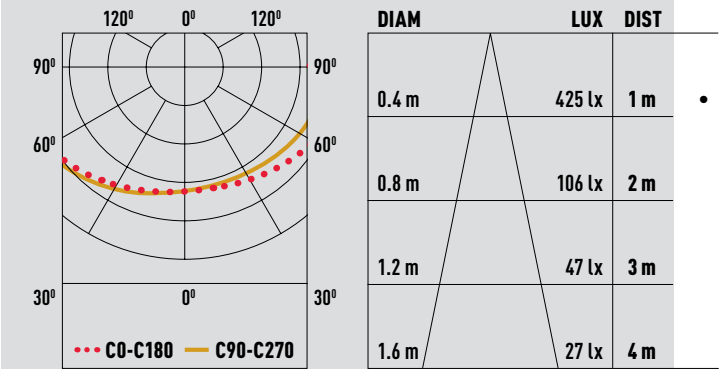

CARTON	Size (L*W*H) cm	PCS	CBM	kg
•	64.5*32*32	20	0.066	9.6

VENTO Reading




WALL + Reading Light

VENTO Reading - A fusion of form and function. This sleek, clean-lined fixture embodies today's leading design trends, boasting a white opal glass shade that casts a warm, inviting glow across your living spaces. But that's not all! The VENTO Reading Lamp also features a rotatable reading light, providing versatility and practicality in one elegant package.








- Wall luminaire
- Reading light
- Adjustable spotlight
- Integrated COB LED
- Aluminum body

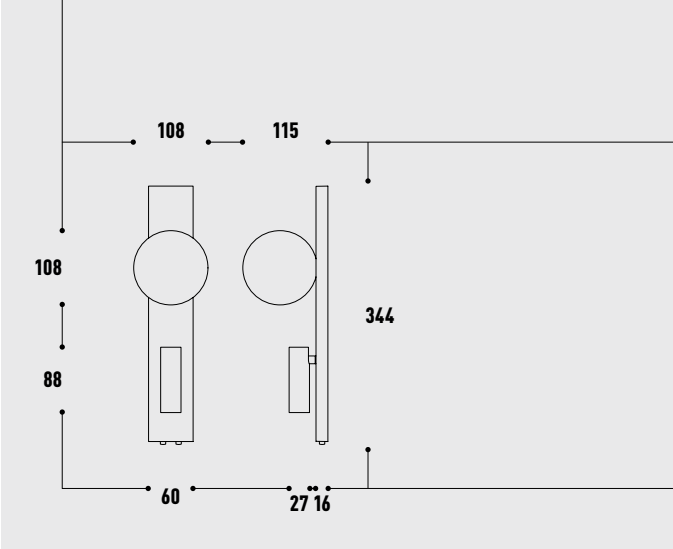

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	177/118	3000	3.6/1.5	-	18°	-	•	White	15473
								Black	15474
								Gold	15475

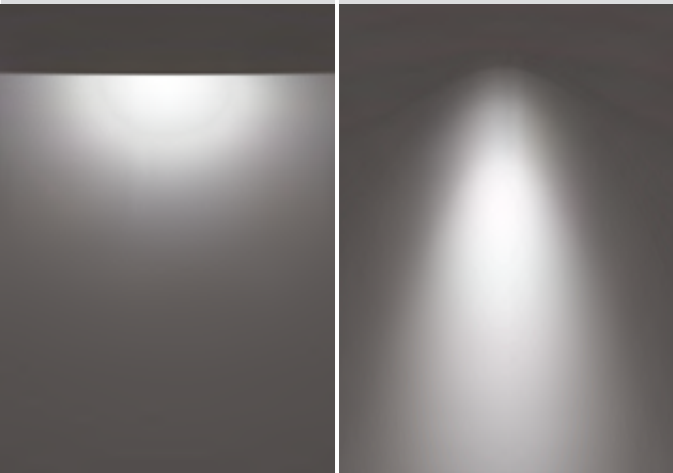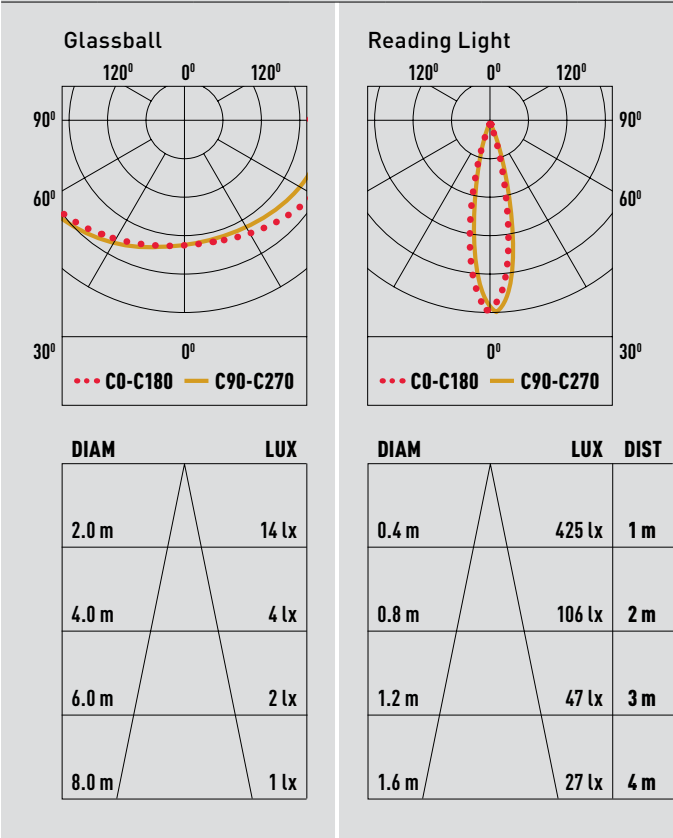

CARTON	Size (L*W*H) cm	PCS	CBM	kg
•	64.5*37*29.5	10	0.07	7.1

SUSPENDED LIGHTS

JIMI
MOON
GLASS BALL

JENNY
TOMI Hanging



JIMI




Suspended Light

JIMI is a thin pendant mount fixture. A metal cylinder that holds an acrylic diffuser in a minimalist design. Two body heights and availability of models with CRI90 make it easy to adapt the luminaire to the needs of the interior. Install solo or in a cluster and personalize by choosing your own hanging lengths.







- Integrated COB LED
- Aluminum body
- CRI 90

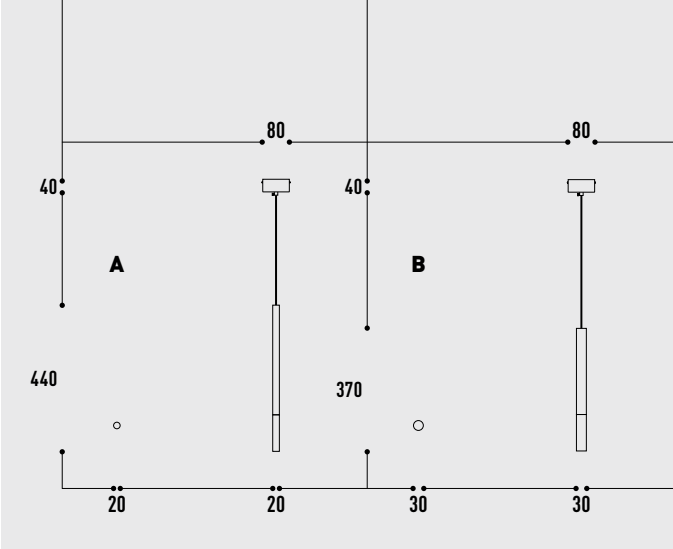

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
LED	300	3000	6	150	-	-	A	White	15906
								Black	15907
								Gold	15908
LED	400	3000	8	200	-	-	B	White	15909
								Black	15910
								Gold	15911

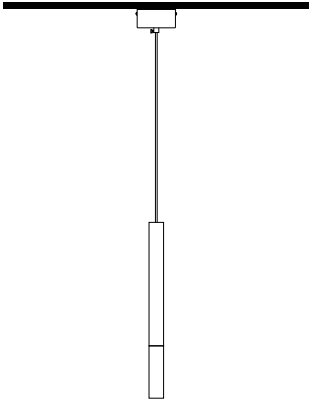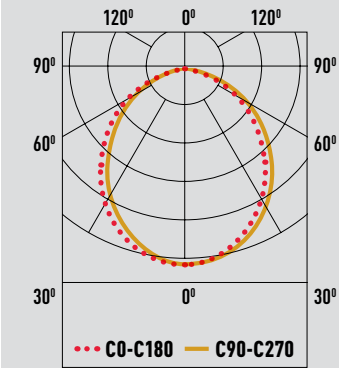


CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	46*36.5*45.5	10	0.07	8.2
B	46*36.5*52.5	20	0.09	8.8


MOON




Suspended Light



MOON is a single LED retro styled sphere shaped pendant. The top shade connects with the lower half at the equator of the sphere, ending on a white opal pvc diffuser. The sphere is tiltable with 90° movement. When lit the light creates uniform light distribution into the surrounding area.

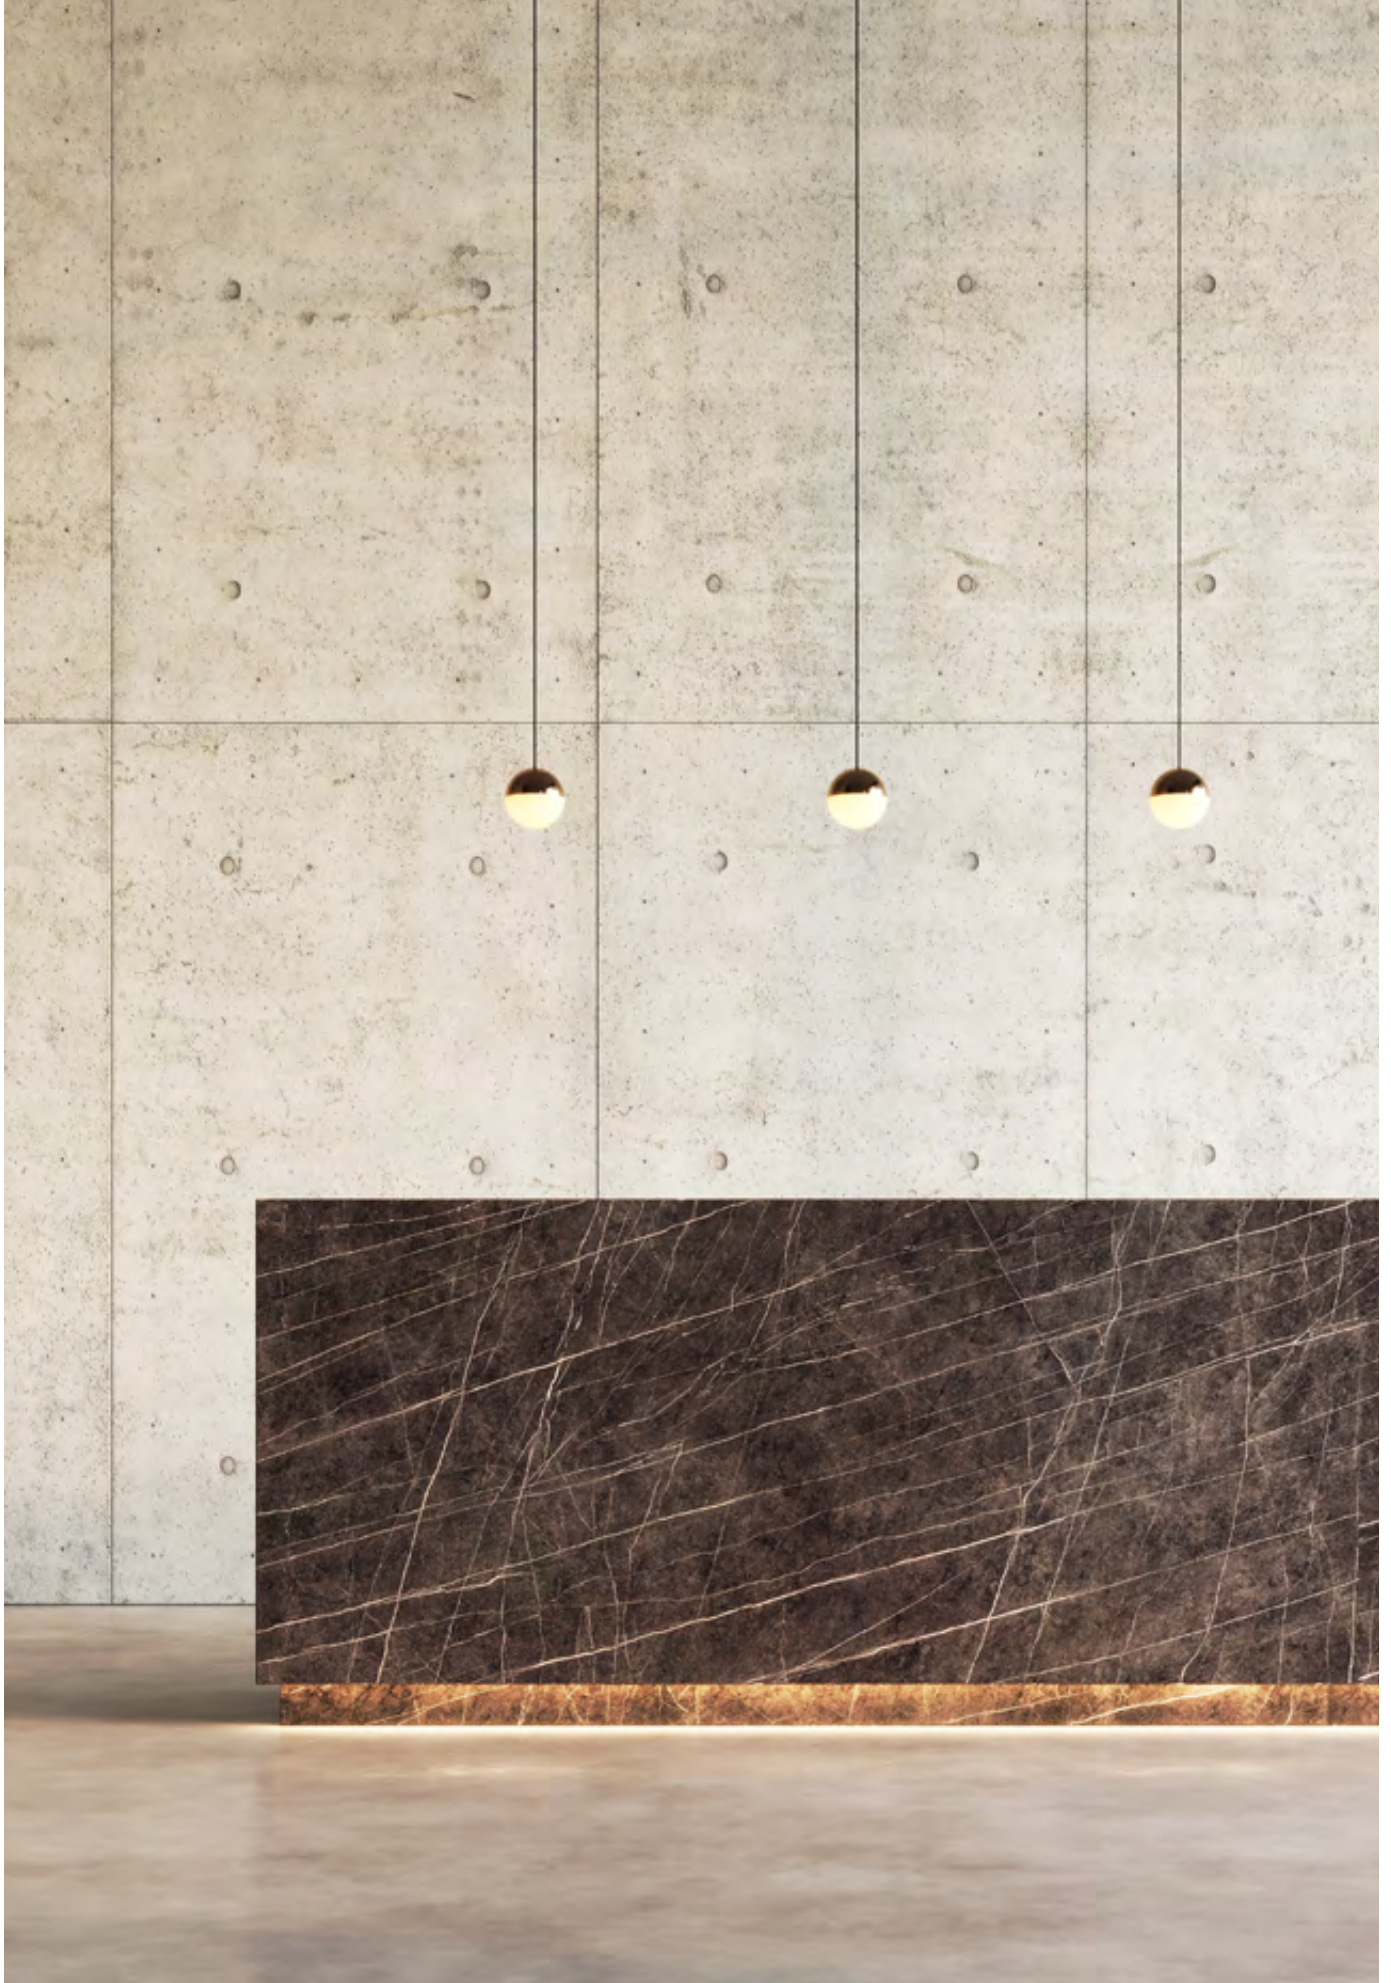

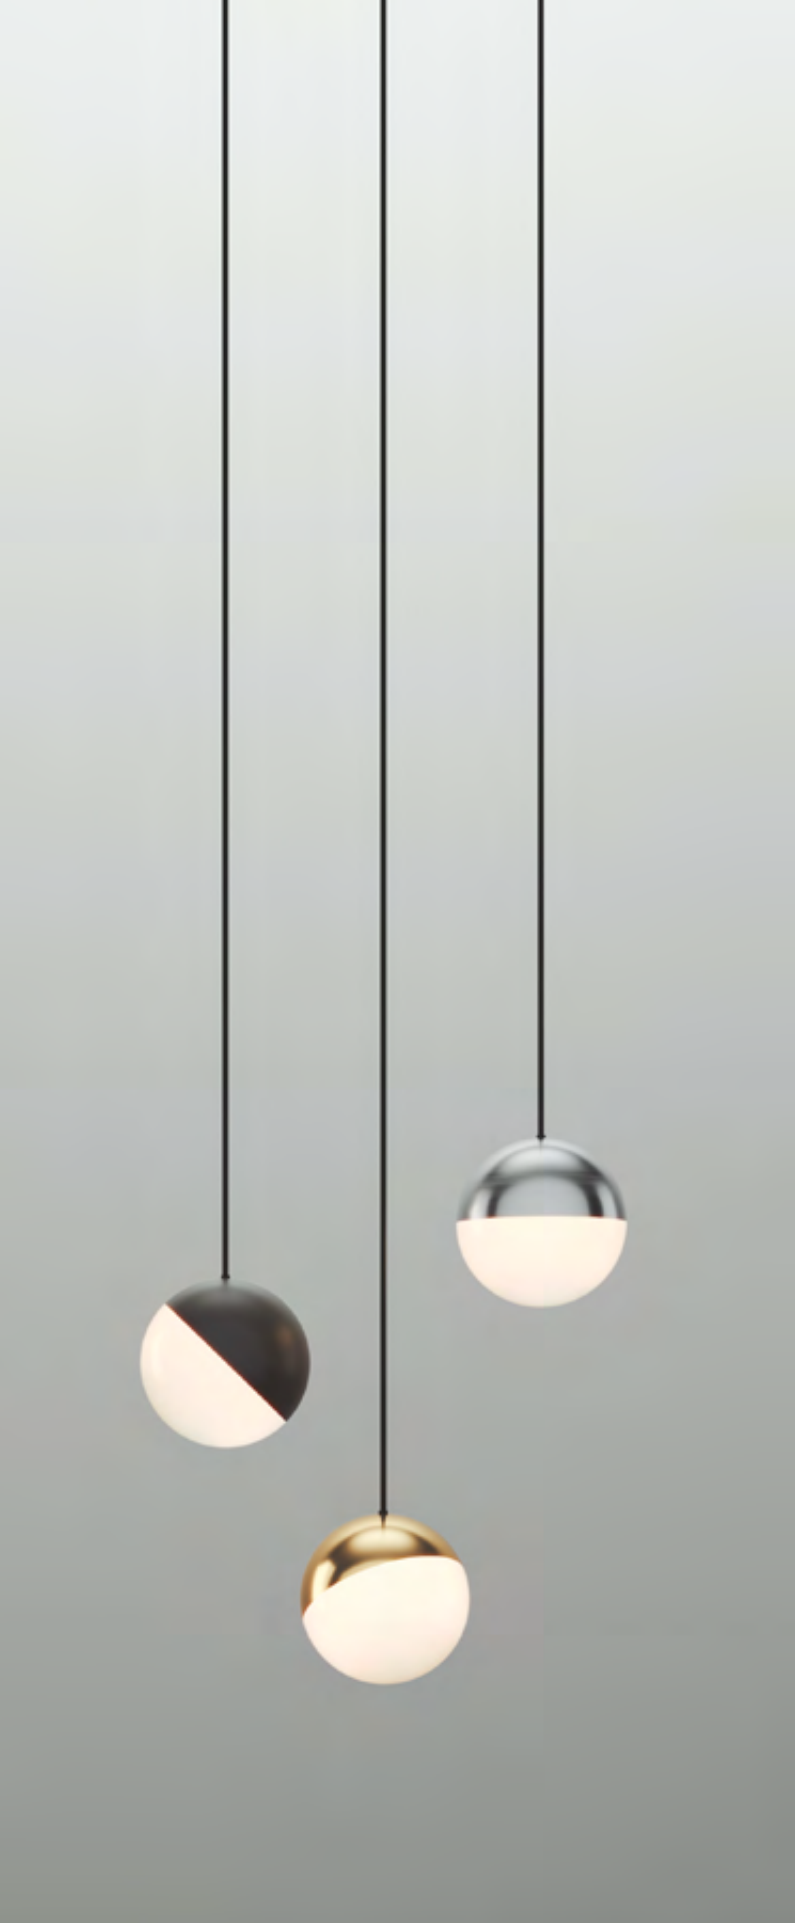- 
- Integrated COB LED
 - Anti glare effect
 - Aluminum body
 - Various cable lengths
up to 5 meters
 - CRI 90

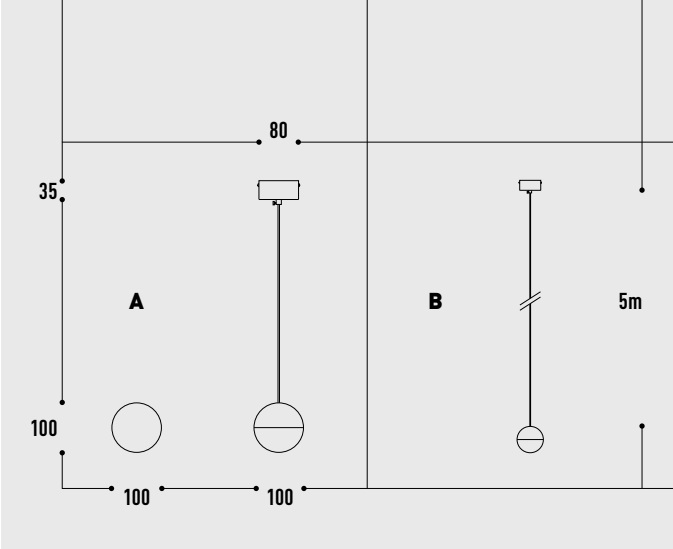

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	525	3000	8	700	90°	-	A	Black	15286
								Gold	15285
COB	525	3000	8	700	90°	-	B	Black	15287
								Gold	15288

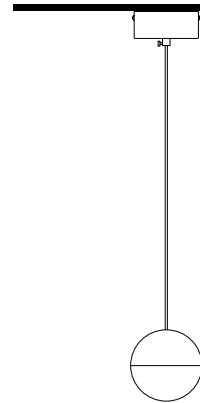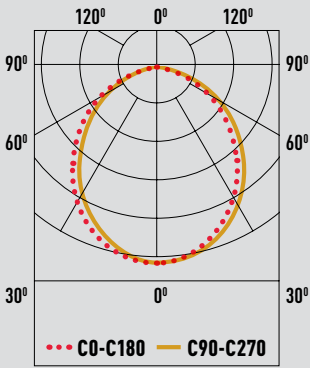

CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	54.5*23*36.5	20	0.05	14.1
B	54.5*23*20	10	0.03	7.6

GLASS BALL




Suspended Light

Glass Ball, a striking suspension lamp, showcases a singular glass orb suspended elegantly from a minimalist matte black fixture. Crafted with advanced glass technology, this luminaire captures the essence of simplicity while casting a gentle, diffused light.







- Integrated COB LED
- Anti glare effect
- Aluminum body
- CRI 80

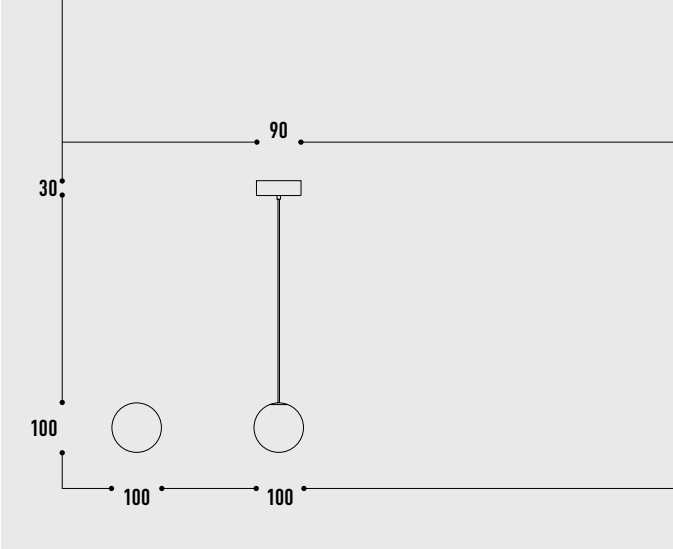


LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	213	3000	5		90°	-	•	Black	15491

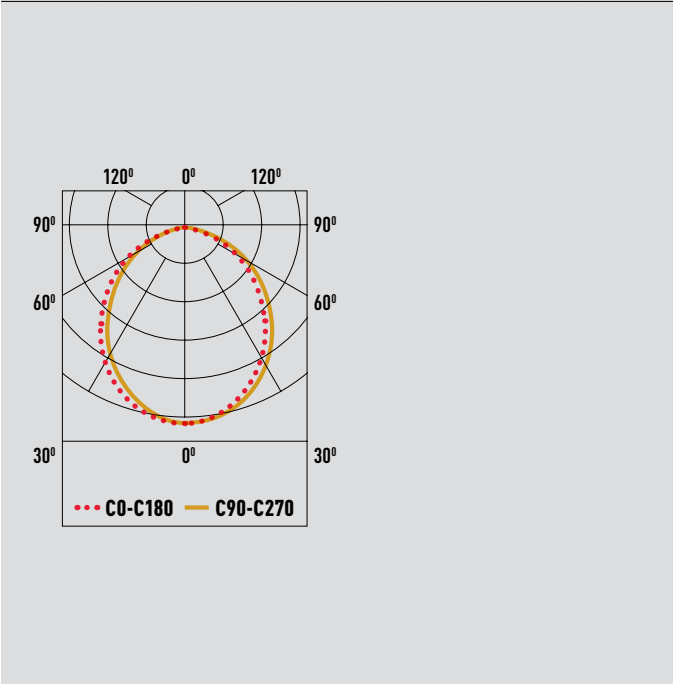

CARTON	Size (L*W*H) cm	PCS	CBM	kg
•	62*37*27.5	20	0.063	12.7

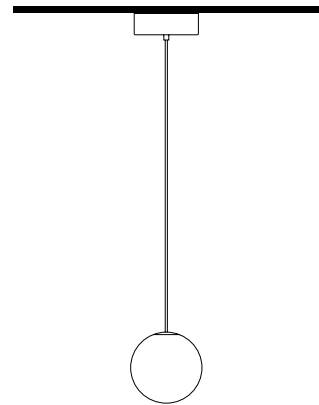

JENNY




Suspended Light

JENNY is a clean eye-catching piece with soft curves and gentle angles. Whether it is used in domestic or public spaces it occupies the space elegantly and effectively. It is perfect for multiple installations, whether in clusters or in a linear fashion. Available in white, black and brushed gold.







- Integrated COB LED
- Aluminum body
- Various canopy options
- CRI 90

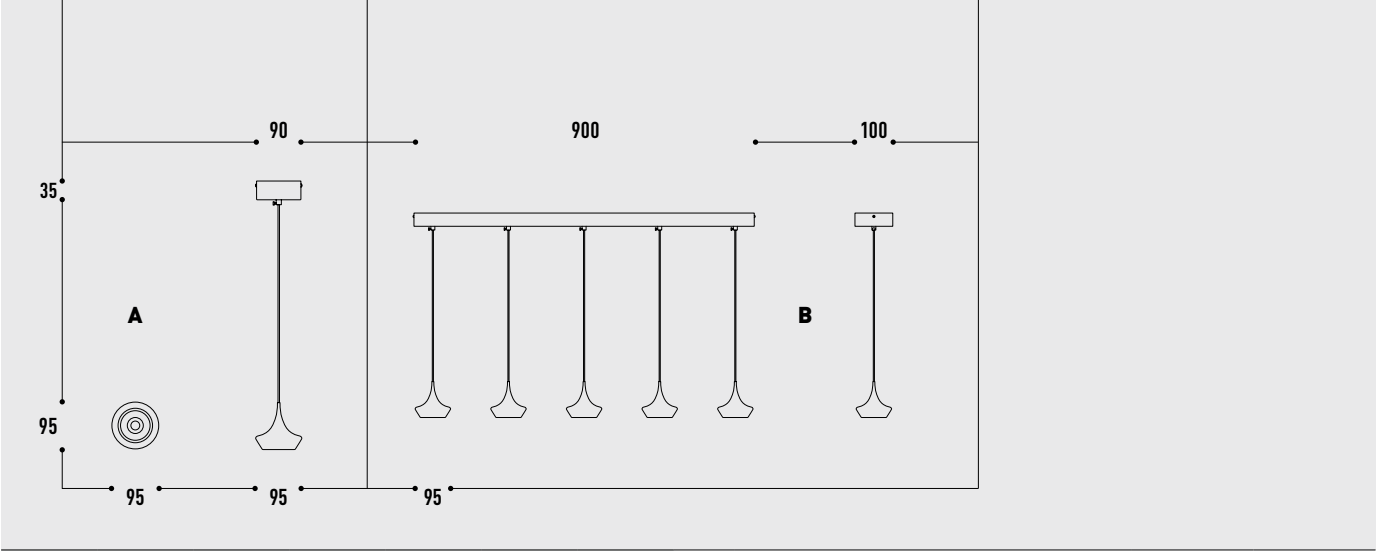


LED	lm	K	W	INPUT V	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	595	3000	5	24	60°	-	A	White	15053
								Black	15054
								Gold/Black	15055
COB	595x5	3000	5x5	24	60°	-	B	White	15057
								Black	15058
								Gold/Black	15056

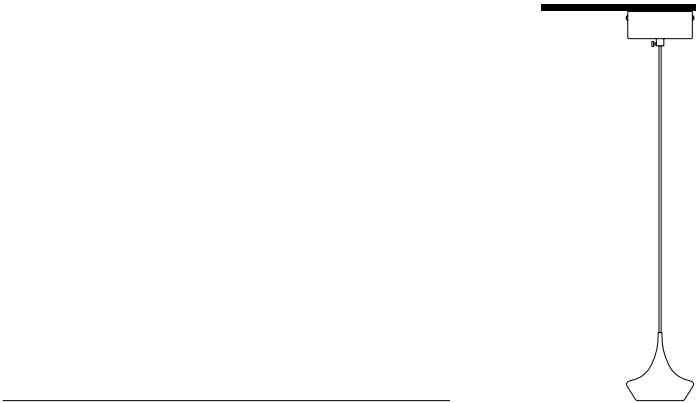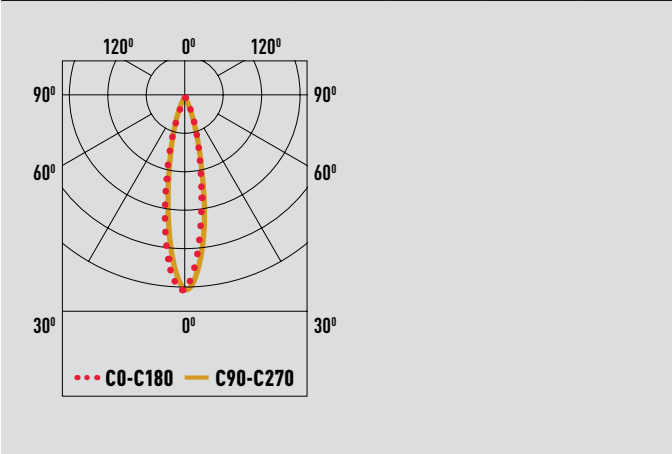

CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	66*21*53	20	0.07	18.9
B	83*13*19.5	1	0.02	4.9

TOMI Hanging




Suspended Light

With a sleek, cylindrical design, this suspension lamp features a 7.5 cm diameter and is crafted from painted aluminum. Offering direct, focused lighting, it maintains the elegant simplicity of the TOMI spotlight. Compatible with all 7.5 cm TOMI accessories, it provides versatile lighting solutions while seamlessly blending into modern interiors.






- Integrated COB LED
- Wide range of accessories
- TRIAC dimmable
- CRI 90

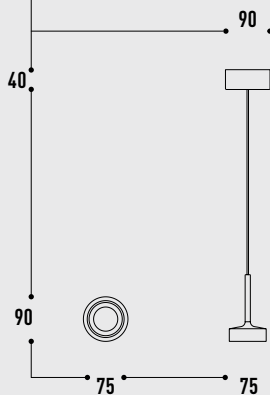

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Dimming
COB	624	3000	7	350	49°	-	C	TRIAC

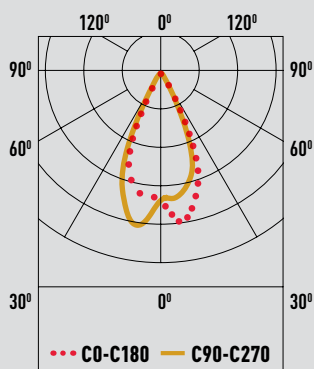


DIAM	LUX	DIST
0.9 m	2226 lx	1 m
1.5 m	210 lx	2 m
2.3 m	247 lx	3 m
3.0 m	139 lx	4 m

OPTIONS

			
Gold* 15348	Rose Gold* 15350	Chrome* 15352	White* 15354

* not included

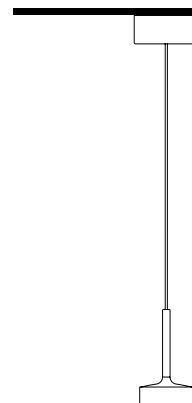


CARTON	Size (L*W*H) cm	PCS	CBM	kg
•	•	•	•	•

DOTTA RECESSED LUMINAIRES


Multi function recessed system, with plenty of variations. Aluminum body integrated with COB LED lights. Trim or trimless options with many accessories. Easy to install thanks to its special tool box.

ACRYLIC
CONE A
CONE B


SQUARE
SPOT
WALL-WASHER

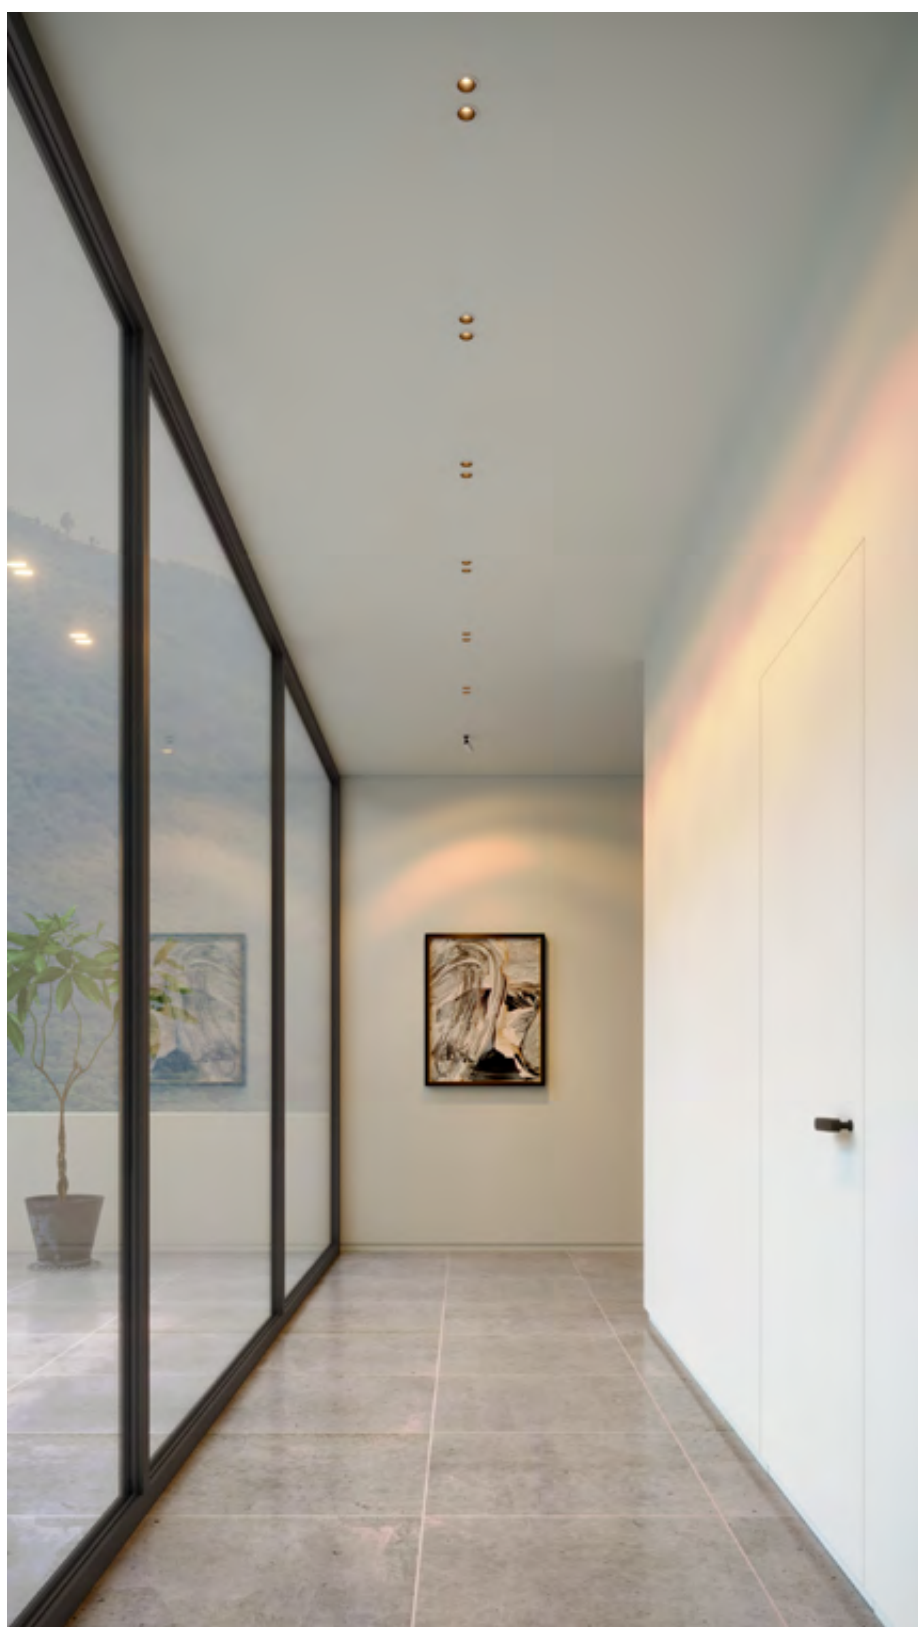




INSTALLATION



Lighting fixture & driver



Tool Kit




Installation is a simple process thanks to the innovative drill tool kit. Final finishing needs a minimum amount of plaster work.

1. Drilling the hole



2. Installation of the frame

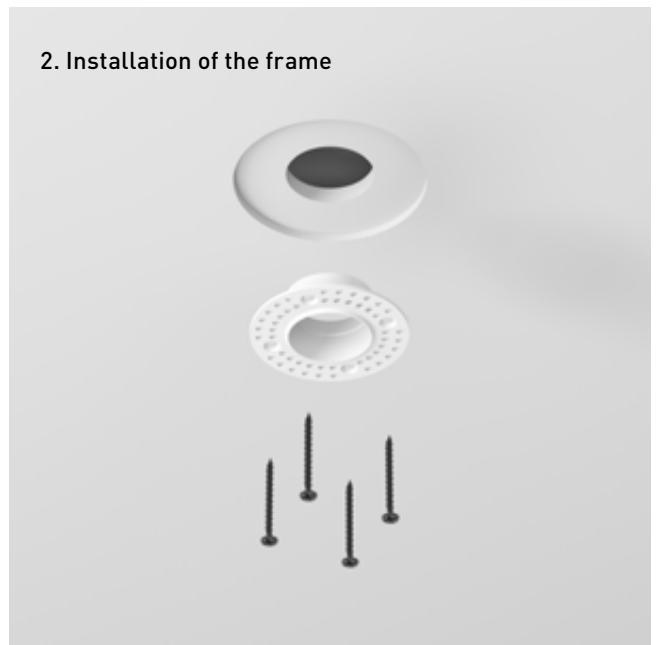

3. Plastering & paint work




4. Positioning the power supply



5. Installation of the fixture




6.

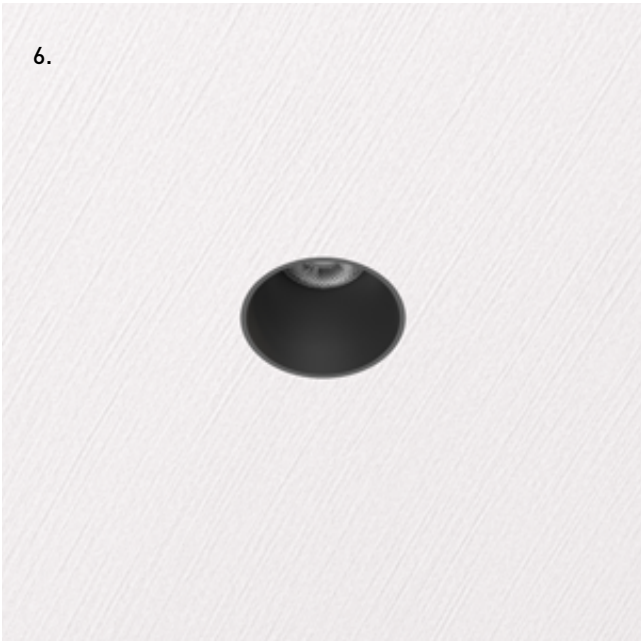

MAINTENANCE

1.

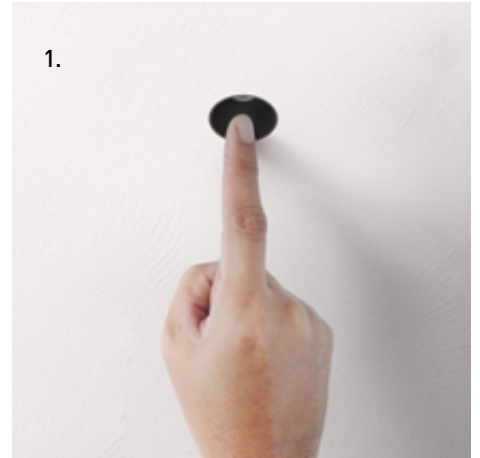

2.



The power supply and the fixture can be removed at any time by simply pressing the fixture once and pulling the fixture.




ACRYLIC

- Wide range of accessories.
- Integration with Low Voltage.
- Dimming version available.
- CRI 90.











OPTIONS



		 Acr-15206		

ACRYLIC 9W

lm	K	W	Cut-out (mm)	Control	Lens	Dimming		 Tool Kit* 152045	 Round Trimless* 15210
370	3000	9	Ø 39 x Ø 85	On-Off	30°	TRIAC* 15217 10°* 15216			

		 Acr-15206		

ACRYLIC 9W (Trim)

lm	K	W	Cut-out (mm)	Control	Lens	Dimming	 Round Trim (W)* 15211	 Round Trim (B)* 15367
370	3000	9	Ø 44	On-Off	30°	TRIAC* 15217 10°* 15216		

* not included

CONE A 9W






- Excellent optical control.
- Interchangeable lenses.
- Wide range of accessories.
- Integration with Low Voltage.
- Dimming version available.
- CRI 90.





Cohen Alon Architecture








OPTIONS



		 W -15204	 B -15205	 G -15365
---	--	--	--	--

CONE A 9W

lm	K	W	Cut-out (mm)	Control	Lens	Dimming	 Tool Kit*	 Round Trimless*
560	3000	9	Ø 39 x Ø 85	On-Off	30°	TRIAC* 15217		
						10°* 15216	152045	15210

		 W -15204	 B -15205	 G -15365
---	---	--	--	--

CONE A 9W (Trim)

lm	K	W	Cut-out (mm)	Control	Lens	Dimming	 Matt White*	 Matt Black*
560	3000	9	Ø 44	On-Off	30°	TRIAC* 15217		
						10°* 15216	15211	15367

* not included





CONE B 13W

- Excellent optical control.
- Interchangeable lenses.
- Wide range of accessories.
- Integration with Low Voltage.
- Built-in dimmable driver (TRIAC).
- CRI 90.











OPTIONS



		 W-15580		 B-15581

CONE B 13W

lm	K	W	Cut-out (mm)	Control	Lens	Dimming	 Tool Kit*	 Round Trimless*
						TRIAC included		
1289	3000	13	φ55*φ85	On-Off	24°	15°* 15586	15585	15582

		 W-15580		 B-15581


CONE B 13W (Trim)

lm	K	W	Cut-out (mm)	Control	Lens	Dimming	 Matt White*	 Matt Black*
						TRIAC included		
1289	3000	13	Ø58	On-Off	24°	15°* 15586	15583	15584

* not included






SQUARE

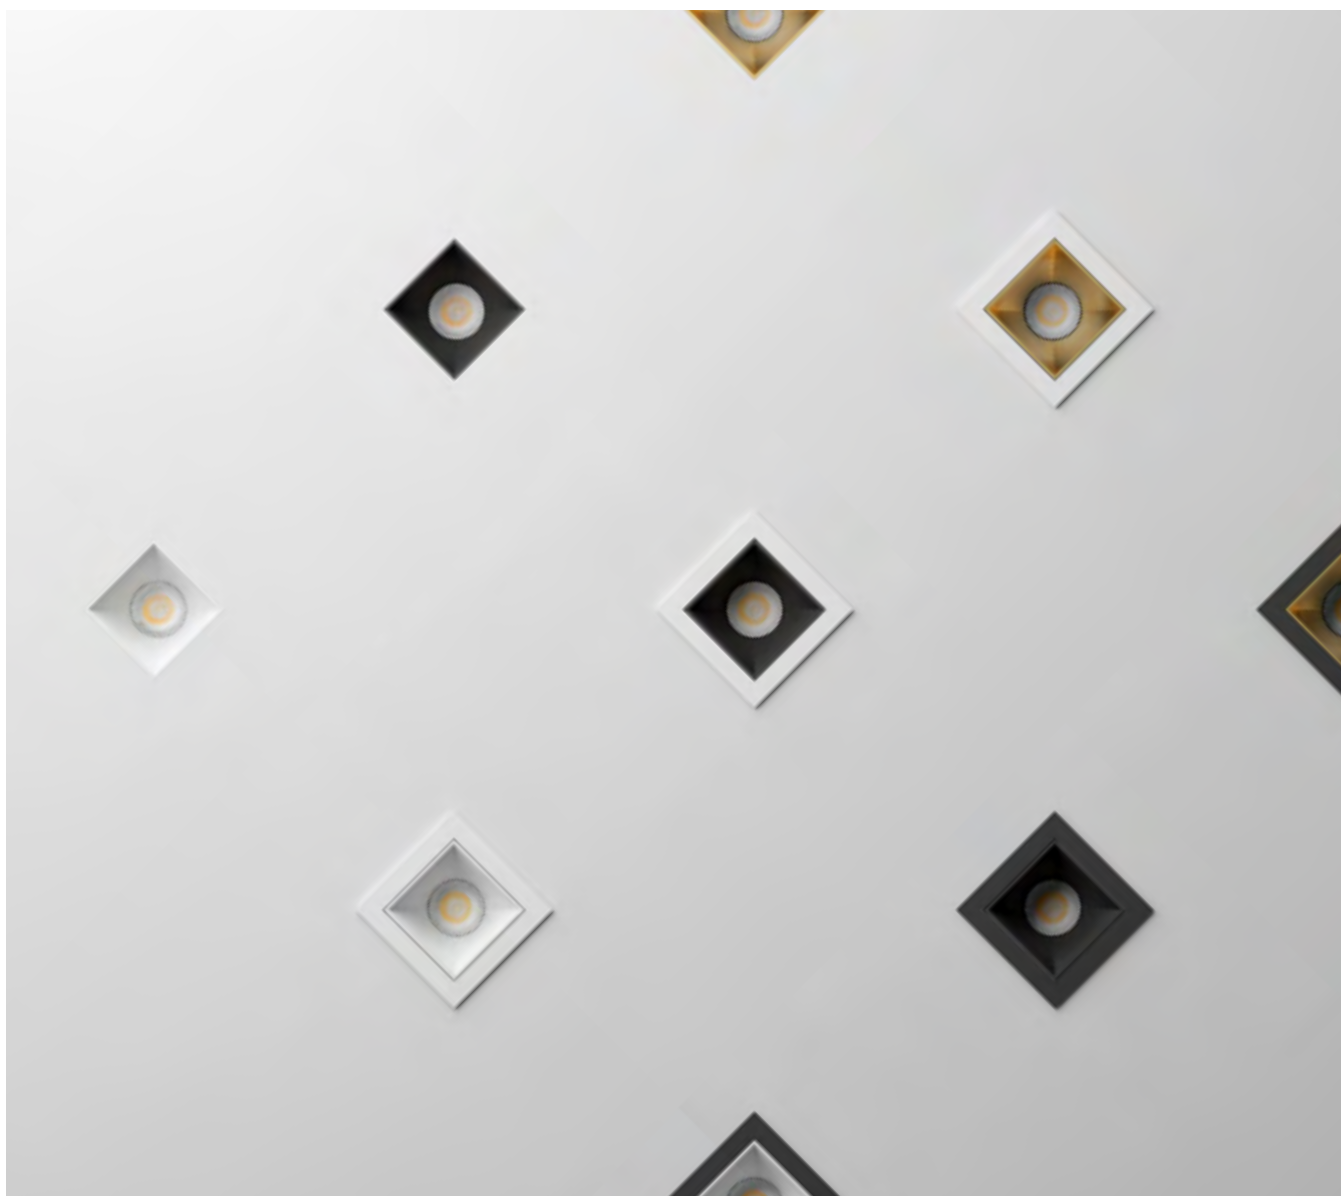- Excellent optical control.
- Interchangeable lenses.
- Wide range of accessories.
- Integration with Low Voltage.
- Dimming version available.
- CRI 90.











OPTIONS



		 W-15212	 B-15213	 G-15366
---	--	---	---	---

SQUARE 9W

lm	K	W	Cut-out (mm)	Control	Lens	Dimming	 Square Trimless*
573	3000	9	39x39 x Ø 85	On-Off	30°	TRIAC* 15217 10°* 15216	15214

		 W-15212	 B-15213	 G-15366
---	---	---	---	---

SQUARE 9W (Trim)

lm	K	W	Cut-out (mm)	Control	Lens	Dimming	 Matt White*	 Matt Black*
573	3000	9	43x43	On-Off	30°	TRIAC* 15217 10°* 15216	15215	15368

* not included





SPOT

- Wide range of accessories.
- Integration with Low Voltage.
- Dimming version available.
- CRI 90.







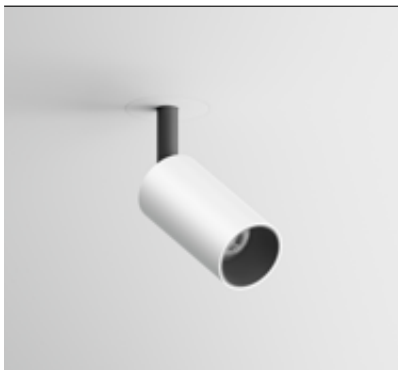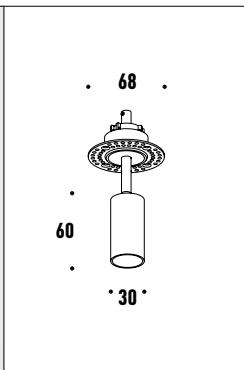

OPTIONS

		 WB-15209		 BB-15370

SPOT 7W

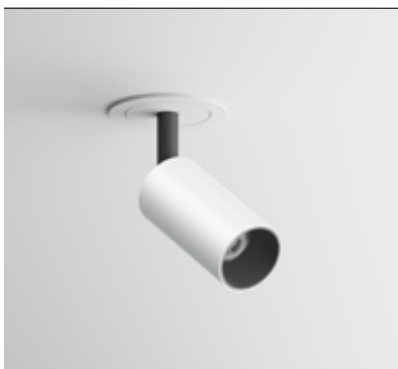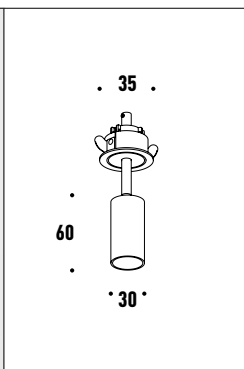lm	K	W	Cut-out (mm)	Control	Lens	Dimming	Tool Kit*	Round Trimless*
464	3000	7	Ø 39 x Ø 85	On-Off	36°	TRIAC* 15218	152045	15210

		 WB-15209		 BB-15370

SPOT 7W (Trim)

lm	K	W	Cut-out (mm)	Control	Lens	Dimming	Matt White*	Matt Black*
464	3000	7	Ø 44	On-Off	36°	TRIAC* 15218	15211	15367

* not included



WALL-WASHER

- Wide range of accessories.
- Integration with Low Voltage.
- Dimming version available.
- CRI 90.







OPTIONS

		 W-15207		 B-15208

WALL-WASHER 6W

lm	K	W	Cut-out (mm)	Control	Lens	Dimming	Tool Kit*	Round Trimless*
253	3000	6	Ø 39 x Ø 85	On-Off	45°	TRIAC* 15217	152045	15210

		 W-15207		 B-15208

WALL-WASHER 6W (Trim)

lm	K	W	Cut-out (mm)	Control	Lens	Dimming	Matt White*	Matt Black*
253	3000	6	Ø 44	On-Off	45°	TRIAC* 15217	15211	15367

* not included

FLOW

LOW VOLTAGE

SYSTEM

Flow system is a multi function system based on 48V. Flow system offers architects plenty of design options. This system with a clicking mechanism can be installed both vertically and horizontally, and has recessed, surface mounted or pendant versions.

TON

TOMI

LIGHT STRIPE

DOTS

BOOK/OUT

GLASSBALL

MOON

Hanging RAIN


Hanging TOMI




TRACKS



- Low Voltage System.
- Minimal design.
- Different kinds of applications.
- Wide range of accessories.

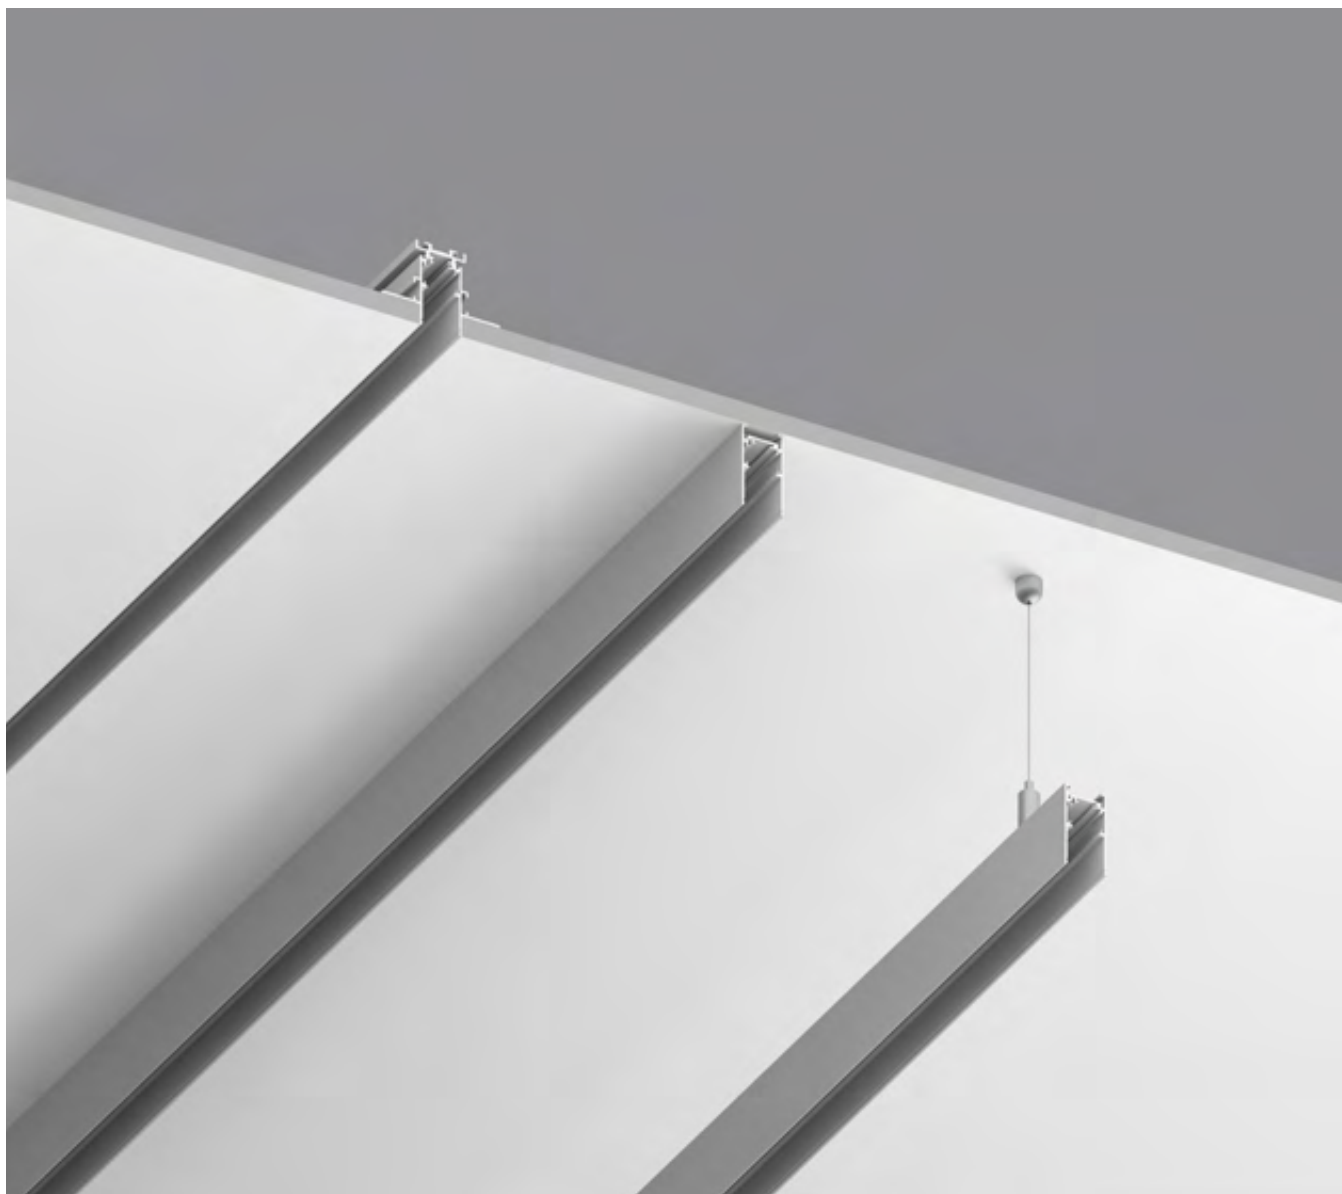

RECESSED

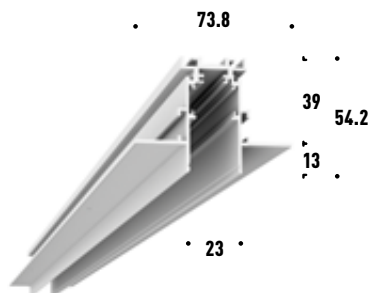

1m TRACK | 15325M
Different Lengths | upon request



"L" CONNECTOR | 15326



"L" CONNECTOR IN | 15327



"L" CONNECTOR OUT | 15328




"T" CONNECTOR | 15380



"X" CONNECTOR | 15378

SURFACE/ SUSPENDED*

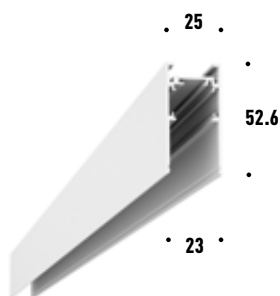

1m TRACK | 15276M
Different Lengths | upon request



DRIVER 250W** | 15429



DRIVER 200W** | 15357



DRIVER 100W** | 15277



"T" CONNECTOR | 15384



"X" CONNECTOR | 15382




"L" CONNECTOR | 15332



HANGING KIT* Chrome | 15355
Black | 15243



CONNECTOR STRAIGHT | 15376



LIVE END | 15281




LIVE END DIM | 15333




CONNECTOR | 15334

TRACKS

- Low Voltage System.
- Minimal design.
- Different kinds of applications.
- Wide range of accessories.

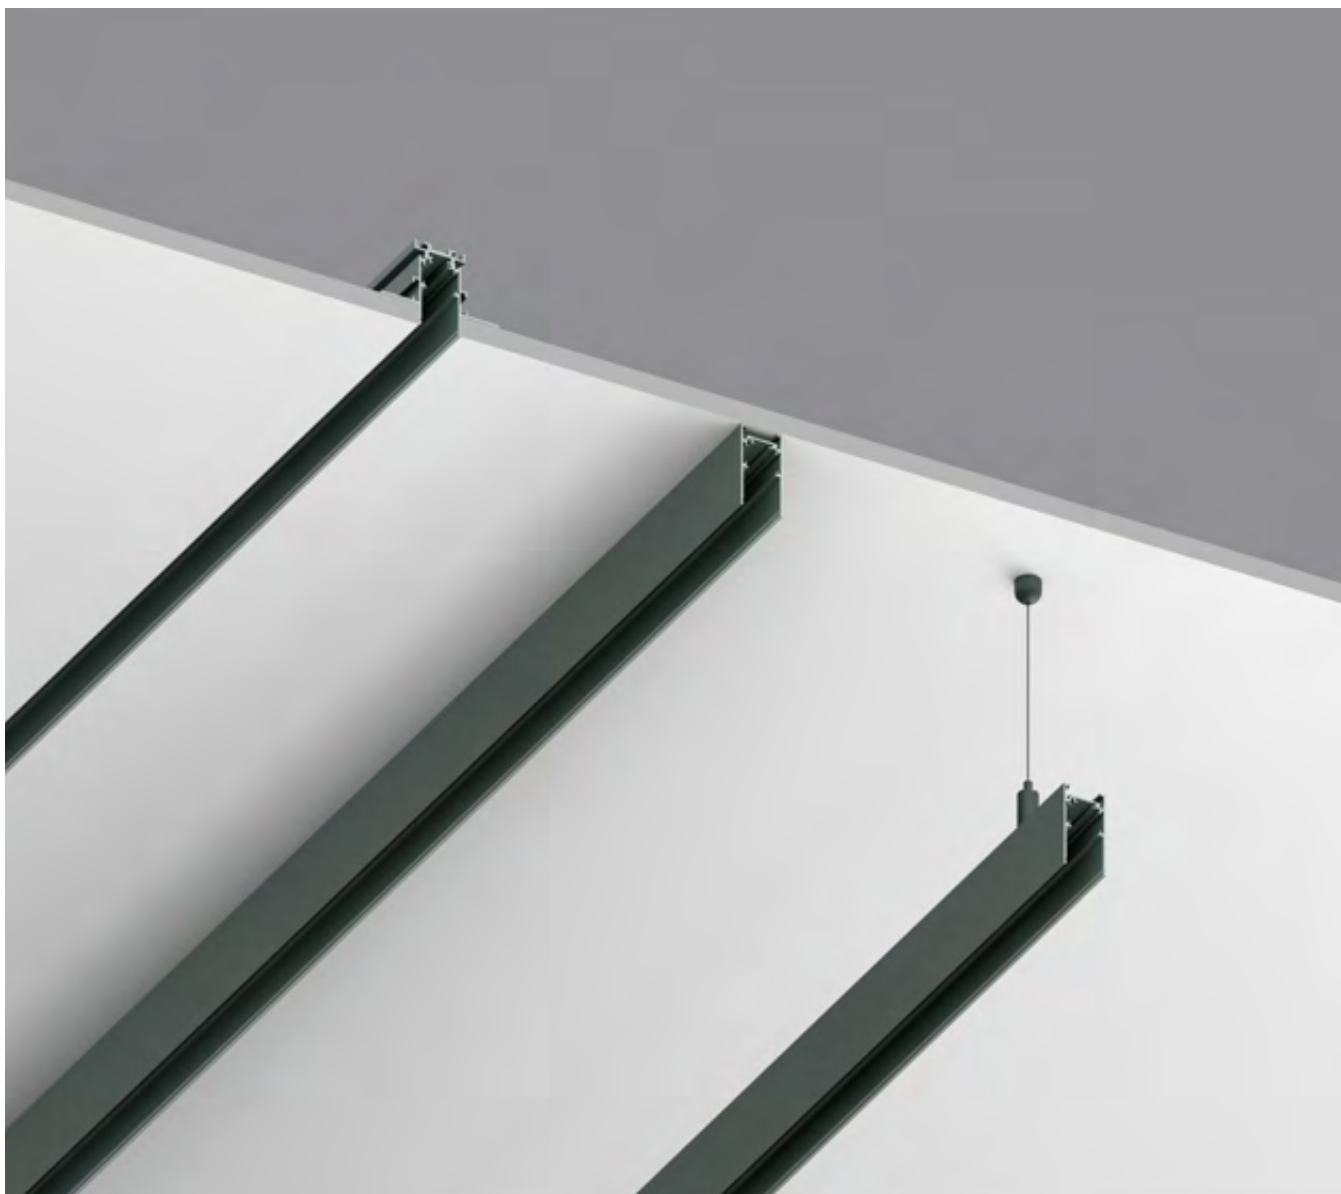

RECESSED

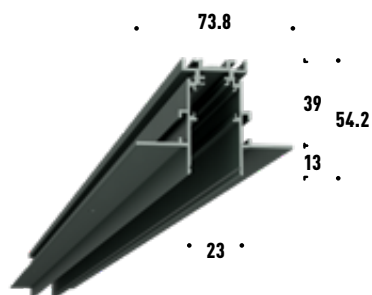


1m TRACK | 15327M
Different Lengths | upon request



"L" CONNECTOR | 15238



"L" CONNECTOR IN | 15239



"L" CONNECTOR OUT | 15240




"T" CONNECTOR | 15379



"X" CONNECTOR | 15377

SURFACE/ SUSPENDED*

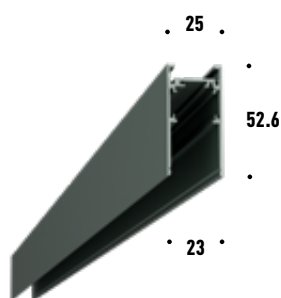

1m TRACK | 15242M
Different Lengths | upon request



DRIVER 250W** | 15428



DRIVER 200W** | 15356



DRIVER 100W** | 15272



"T" CONNECTOR | 15383



"X" CONNECTOR | 15381



"L" CONNECTOR | 15244




HANGING KIT* Black | 15243
Chrome | 15355



CONNECTOR STRAIGHT | 15375



LIVE END | 15280




LIVE END DIM | 15247



CONNECTOR | 15248

TRACKS CONNECTORS

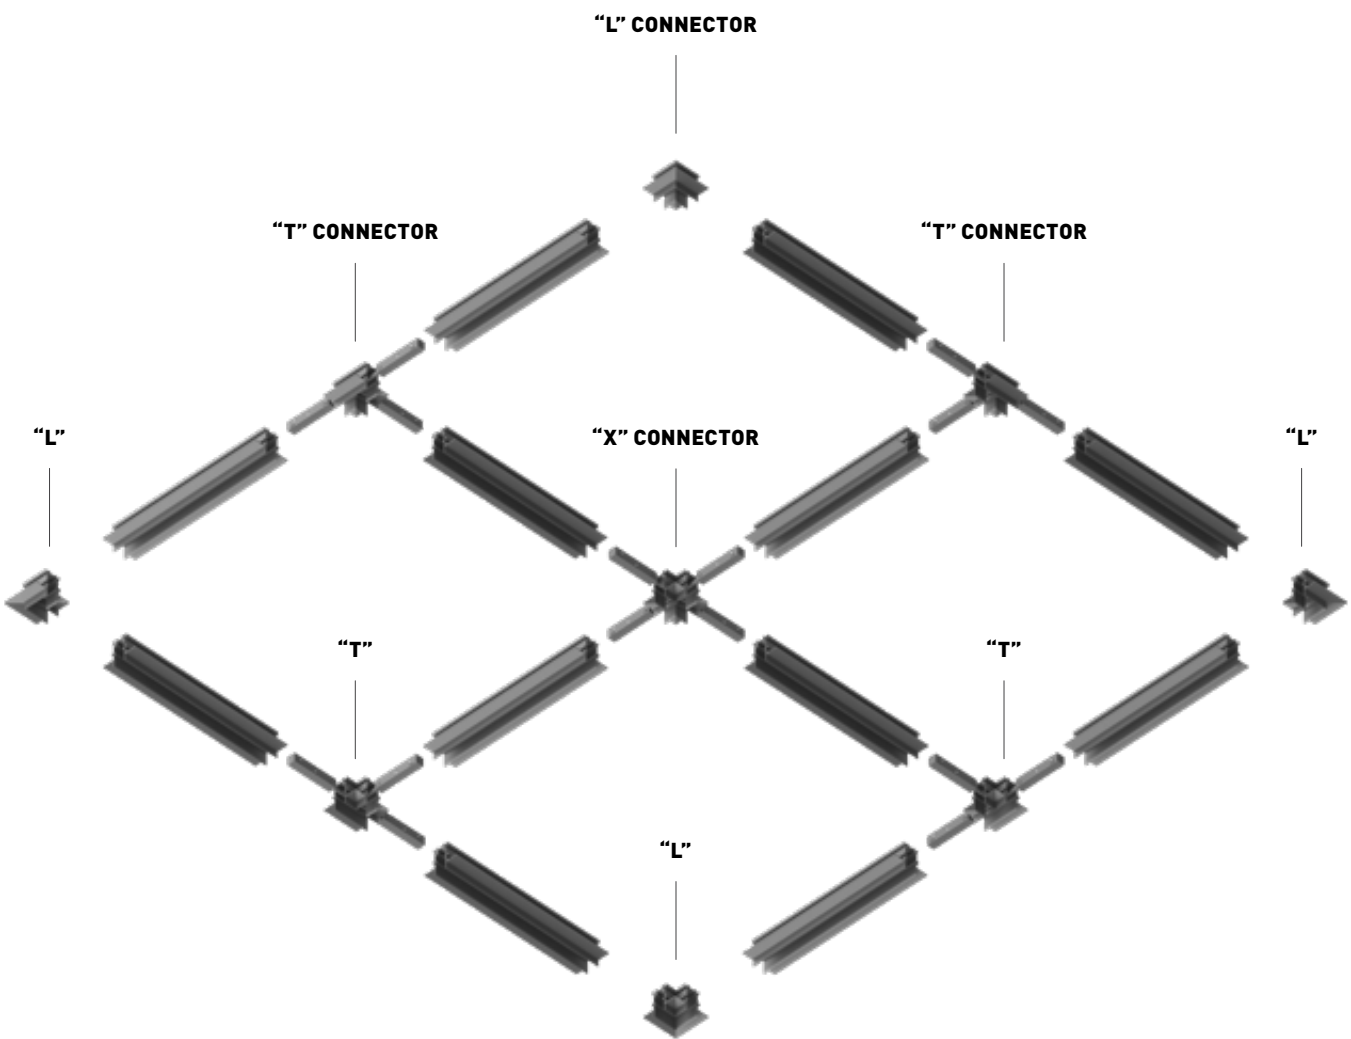

RECESSED




"L" CONNECTOR | B-15238
| W-15326



"T" CONNECTOR | B-15379
| W-15380



"X" CONNECTOR | B-15377
| W-15378

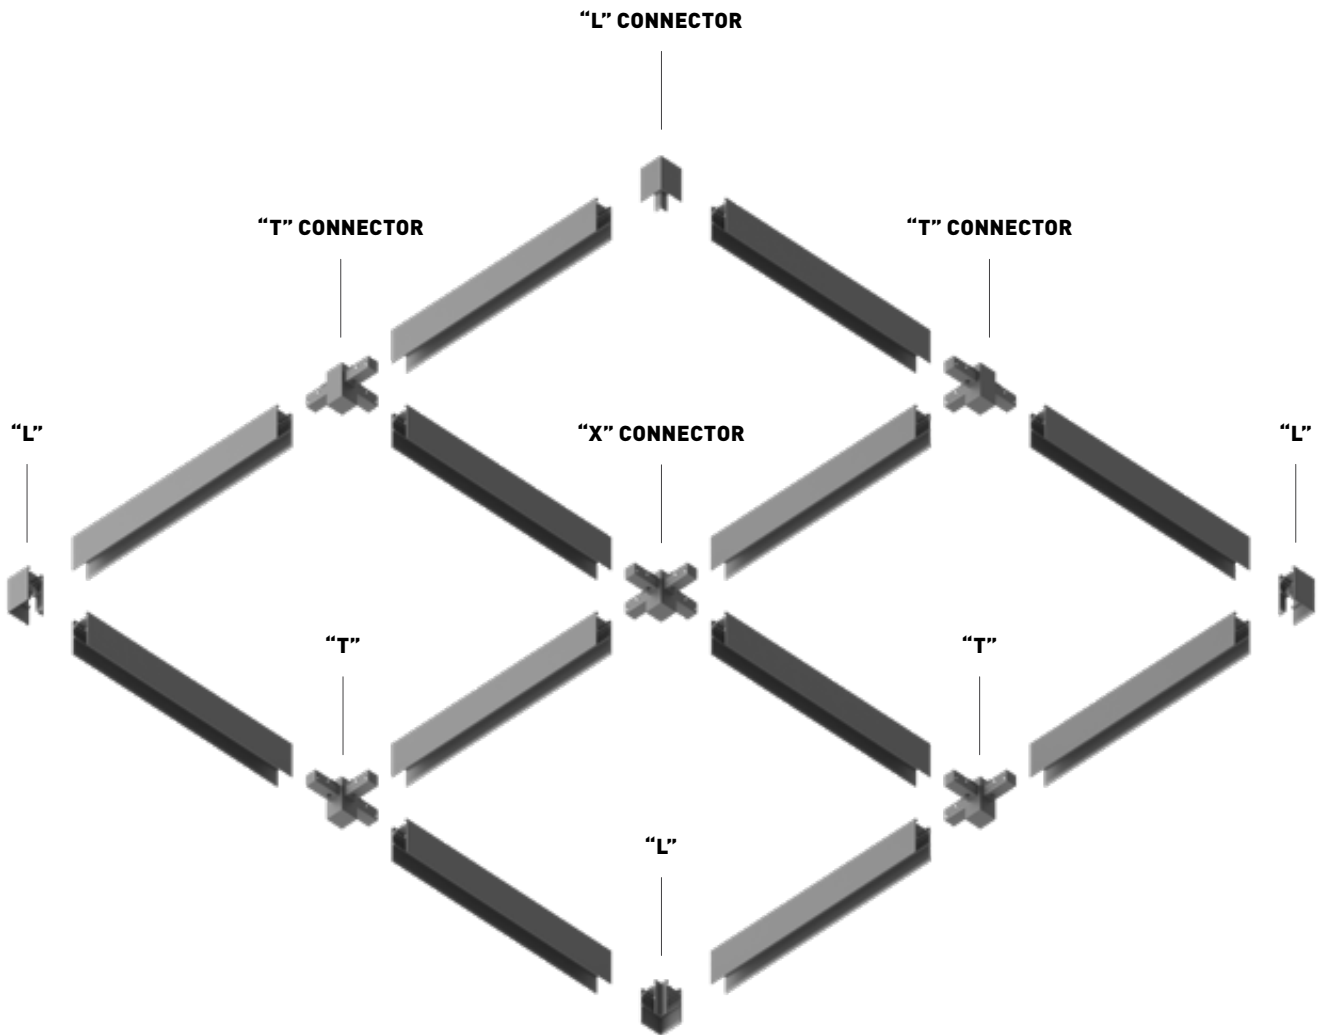

SURFACE/SUSPENDED



"L" CONNECTOR | B-15244
| W-15332



"T" CONNECTOR | B-15383
| W-15384




"X" CONNECTOR | B-15381
| W-15382



TON



- Excellent optical control.
- Wide range of accessories.
- Integration with Low Voltage.
- DALI version available.
- CRI 90.


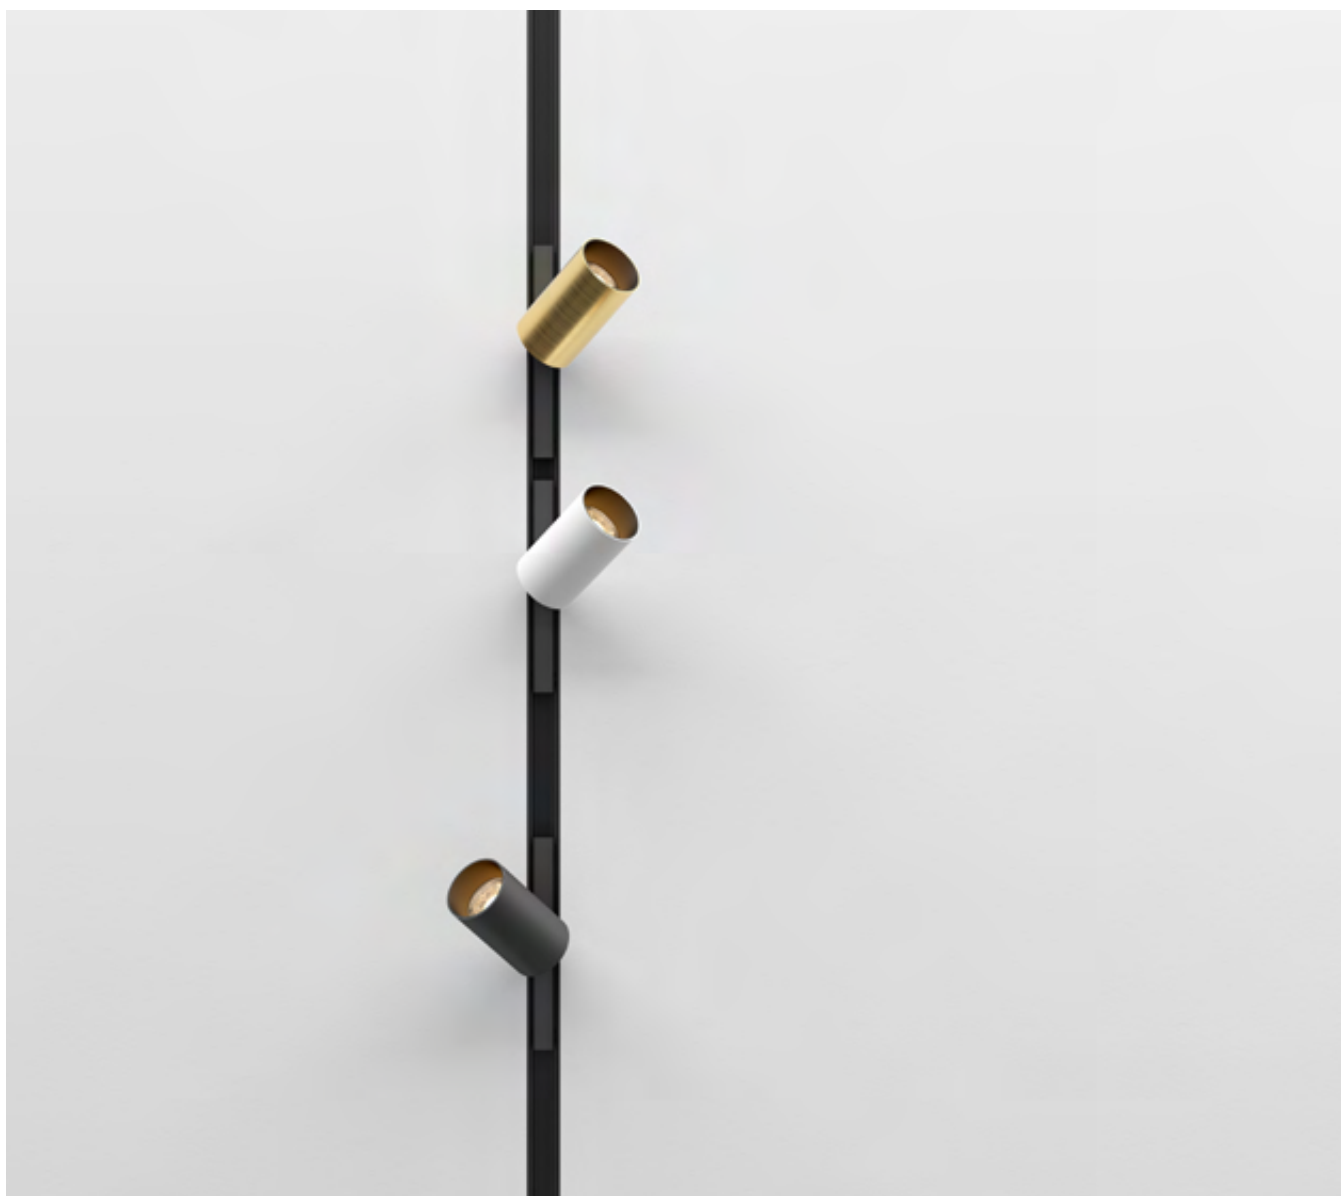


OPTIONS

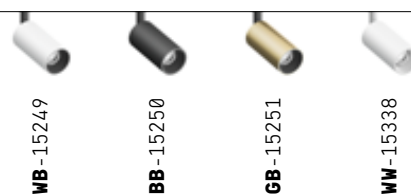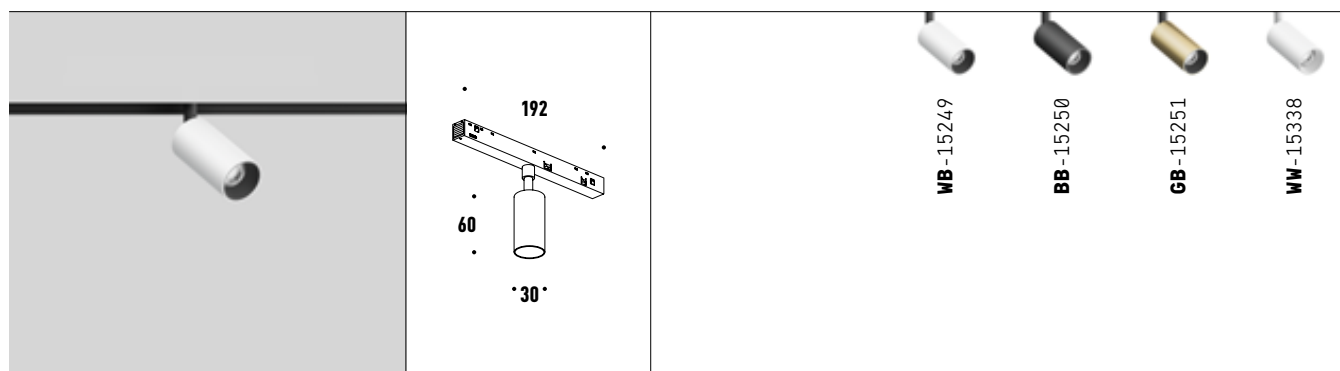



TON 6W

lm	K	W	Control	Lens	Dimming
420	3000	6	On-Off	24°	0-10V* 15278
					DALI* 15279
					36°* 15362 50°* 15363

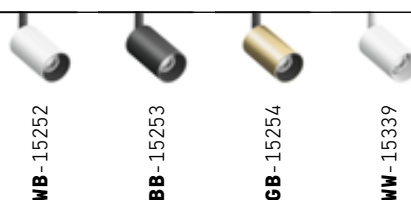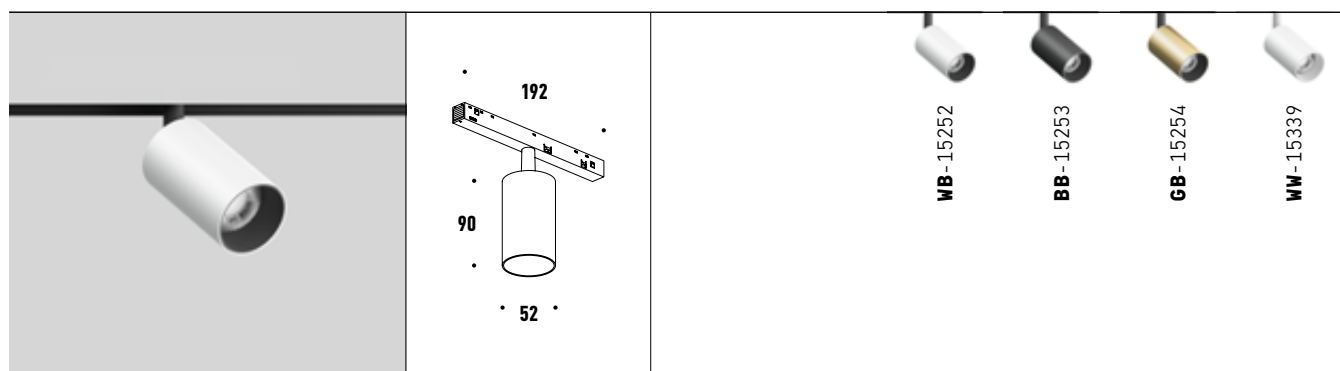

TON 11W

lm	K	W	Control	Lens	Dimming
925	3000	11	On-Off	30°	0-10V* 15278
					DALI* 15279
					15°* 15265 50°* 15266

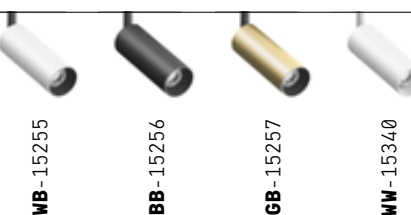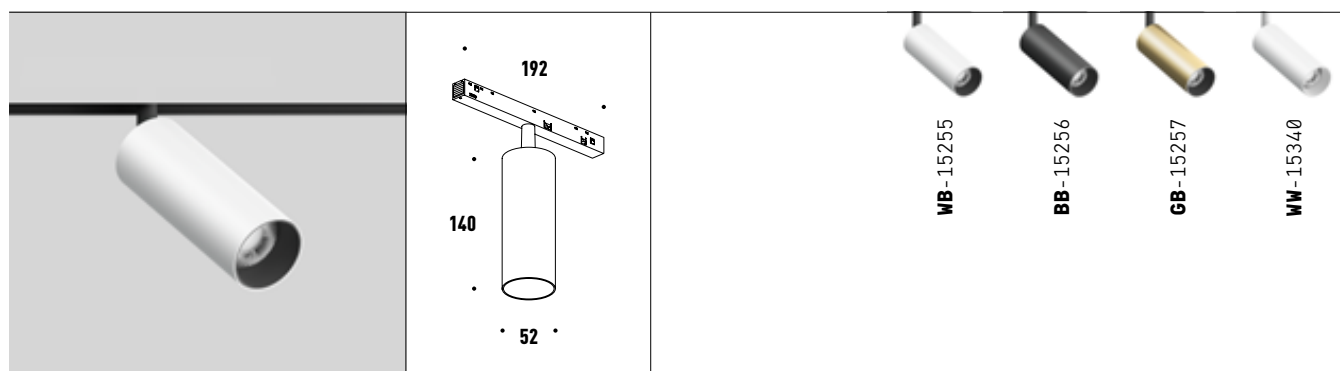

TON 16W


lm	K	W	Control	Lens	Dimming
1310	3000	16	On-Off	30°	0-10V* 15278
					DALI* 15279
					15°* 15265 50°* 15266



* not included





TOMI

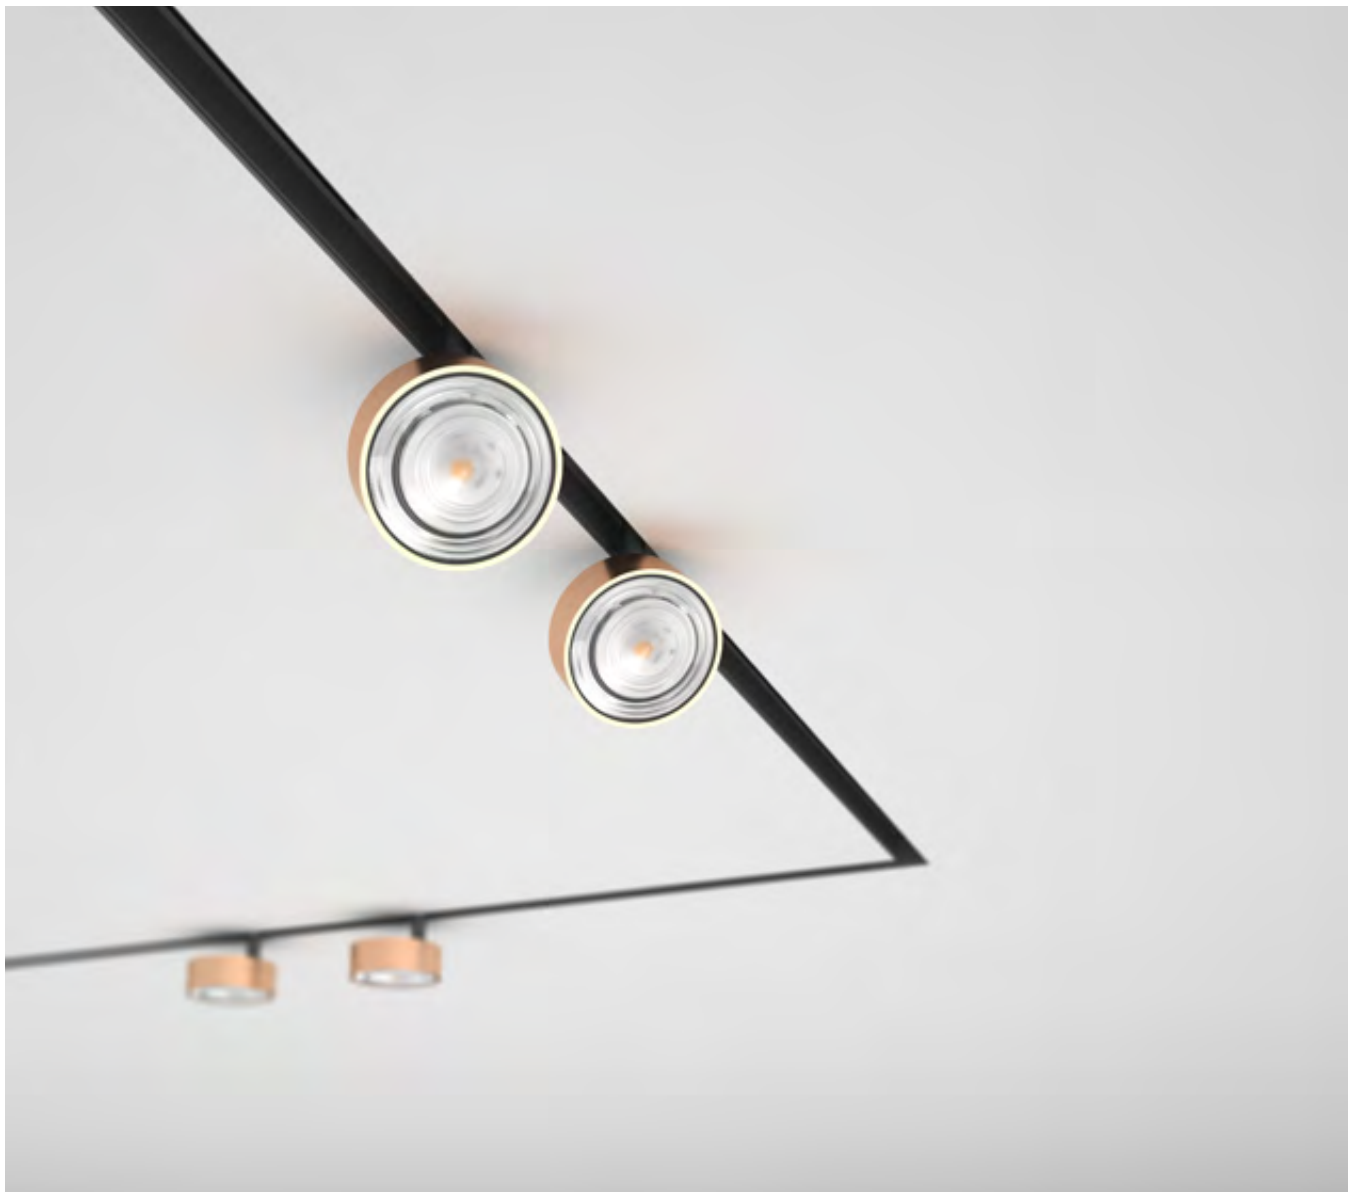- Excellent optical control.
- Available in different finishes.
- Integration with Low Voltage.
- DALI version available.
- CRI 90.





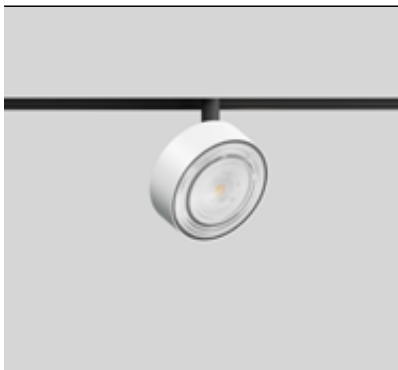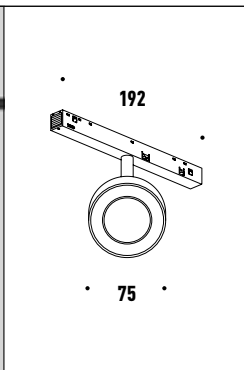







OPTIONS



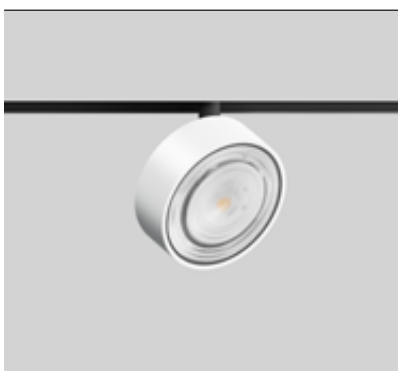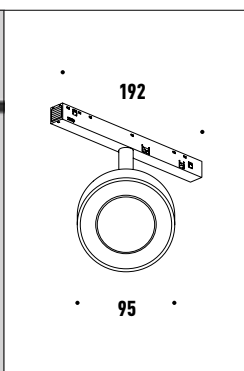

			 Total White-15360  Total Black-15361			
--	--	--	--	--	--	--

TOMI 9W

lm	K	W	Control	Lens	Dimming	 Brushed Gold* 15348	 Brushed Rose Gold* 15350	 Brushed Chrome* 15352	 Matt White* 15354
					0-10V* 15278				
					DALI* 15279				
640	3000	9	On-Off	40°	15°* 15346				

			 Total White-15358  Total Black-15359			
---	--	---	--	--	--	--

TOMI 13W

lm	K	W	Control	Lens	Dimming	 Brushed Gold* 15347	 Brushed Rose Gold* 15349	 Brushed Chrome* 15351	 Matt White* 15353
					0-10V* 15278				
					DALI* 15279				
1260	3000	13	On-Off	30°	15°* 15345				

* not included


LIGHT STRIPE



- Clean minimal design.
- Diffused light effect.
- Integration with Low Voltage.
- DALI version available.




OPTIONS

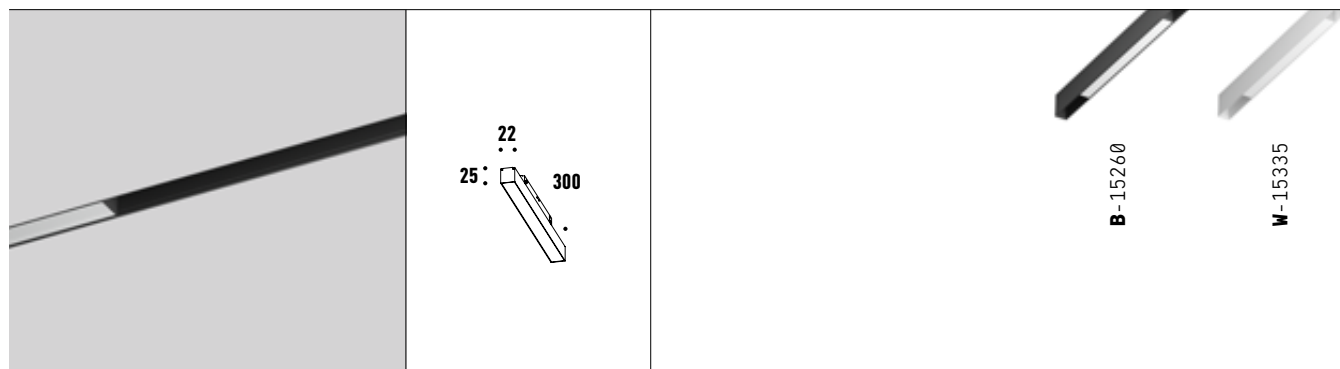


LIGHT STRIPE 30cm

lm	K	W	Control	Lens	Dimming
625	3000	14	On-Off	90°	0-10V* 15278
					DALI* 15279

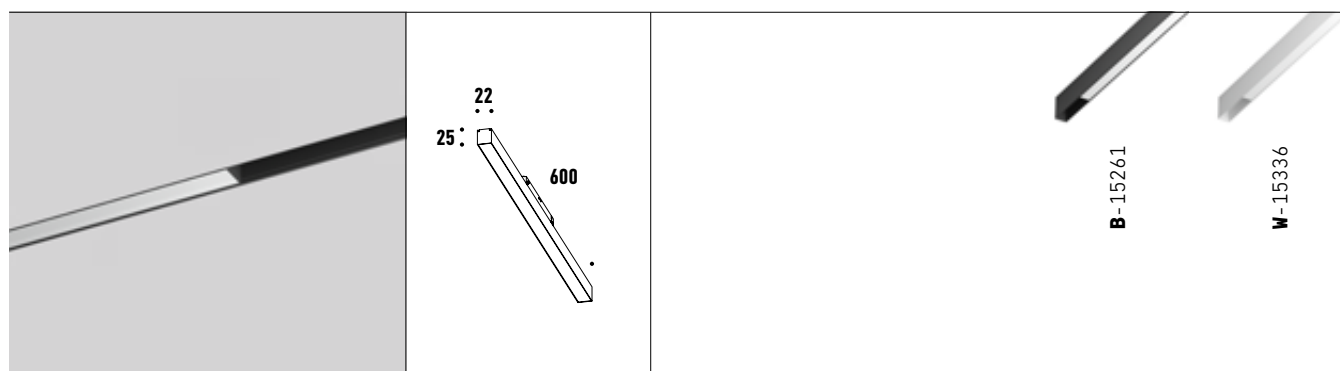

LIGHT STRIPE 60cm

lm	K	W	Control	Lens	Dimming
1090	3000	20	On-Off	90°	0-10V* 15278
					DALI* 15279

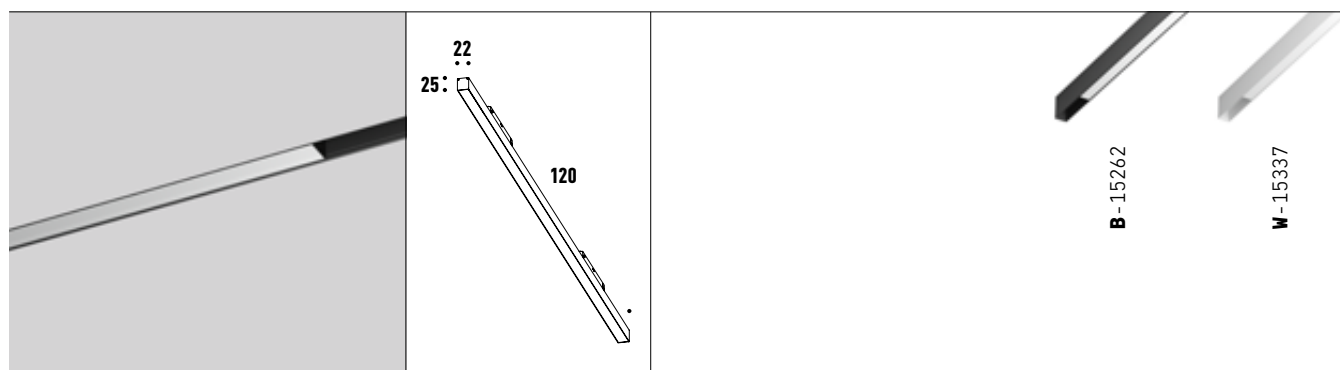

LIGHT STRIPE 120cm

lm	K	W	Control	Lens	Dimming
1850	3000	30	On-Off	90°	0-10V* 15278
					DALI* 15279

* not included


DOTS

- Excellent optical control.
- Dark Light effect.
- Integration with Low Voltage.
- DALI version available.
- CRI 90.






OPTIONS

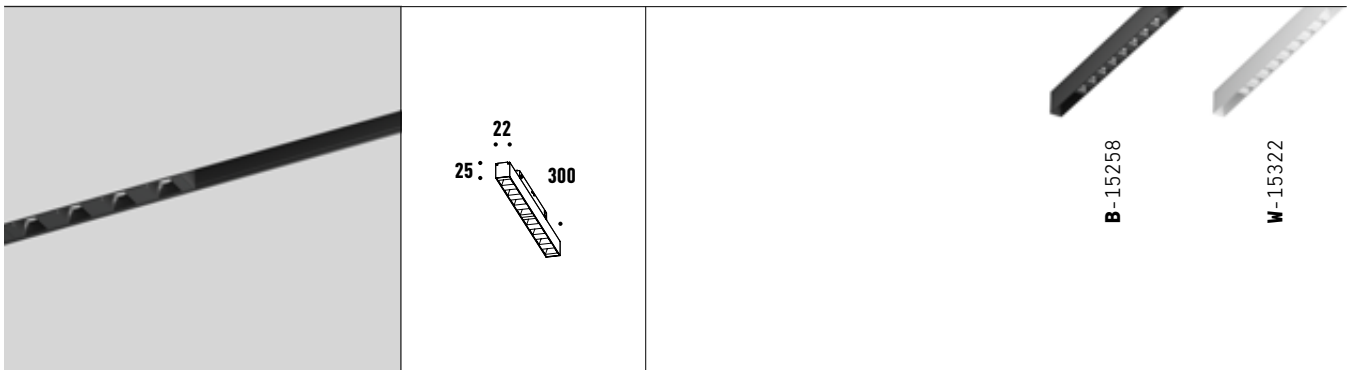

DOTS 30cm

lm	K	W	Control	Lens	Dimming
1320	3000	14	On-Off	24°	0-10V* 15278 DALI* 15279

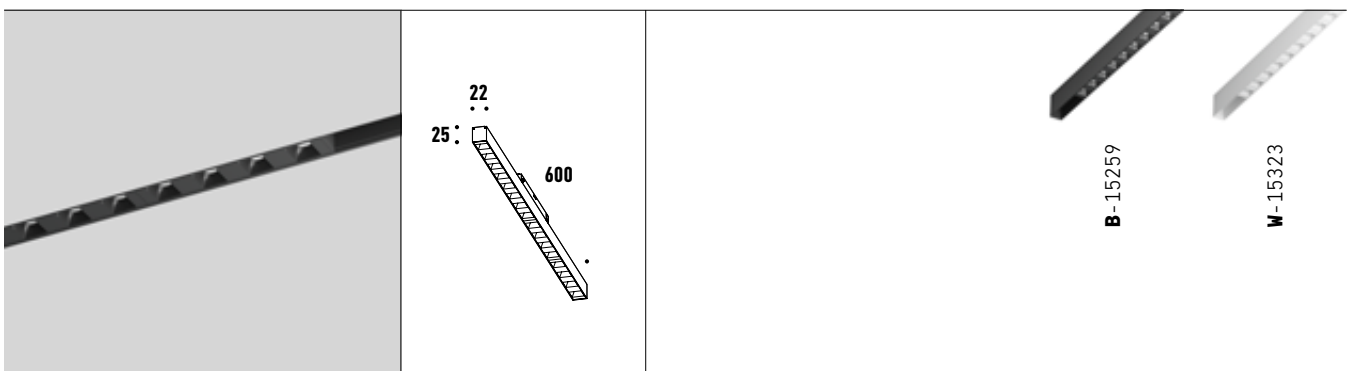

DOTS 60cm

lm	K	W	Control	Lens	Dimming
1955	3000	20	On-Off	24°	0-10V* 15278 DALI* 15279



* not included

BOOK/OUT

- Clean minimal design.
- Diffused light effect.
- Integration with Low Voltage.
- DALI version available.




OPTIONS

		<div>   </div> <div> B-15320 W-15321 </div>
--	--	---

BOOK STRIP 15cm

lm	K	W	Control	Lens	Dimming
1035	3000	15	On-Off	90°	0-10V* 15278
					DALI* 15279

OPTIONS

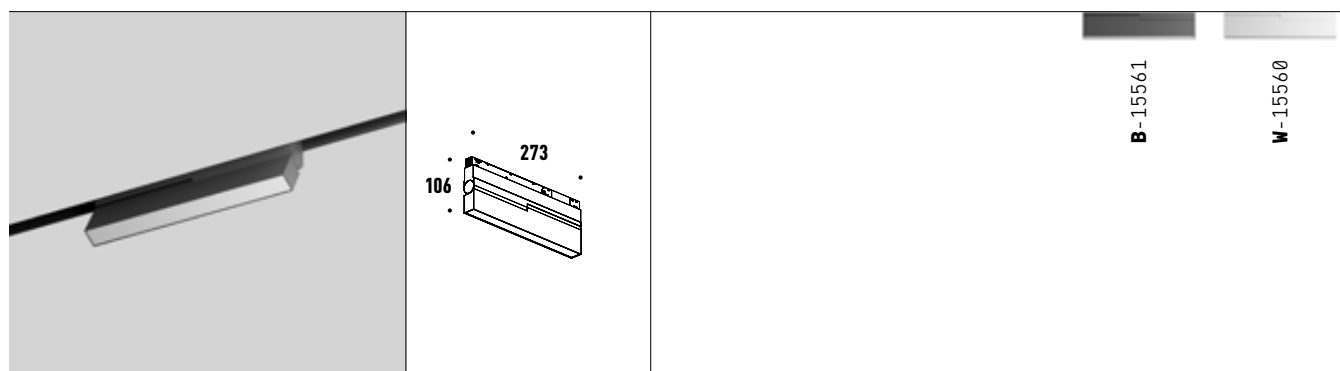


B-15561

W-15560

BOOK STRIP 27cm

lm	K	W	Control	Lens	Dimming
428	3000	12	On-Off	109°	0-10V* 15278
					DALI* 15279

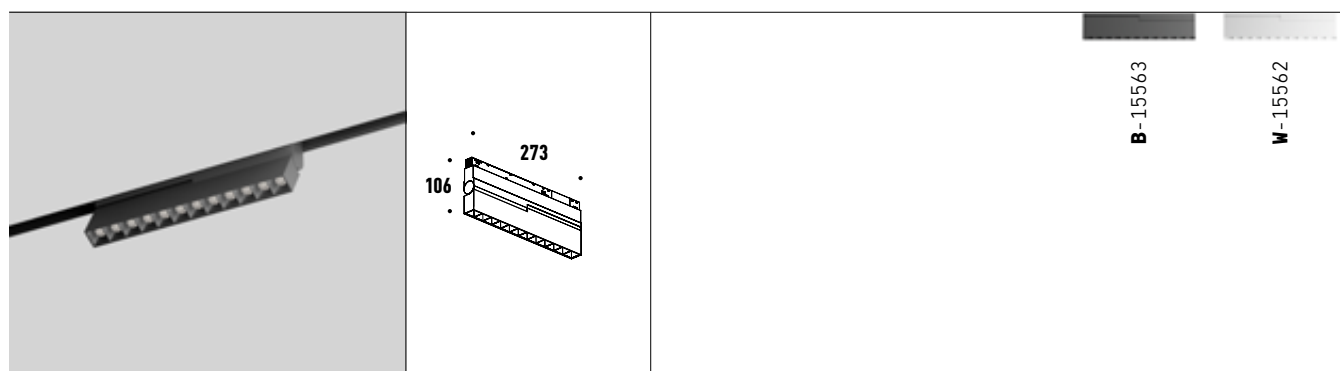


B-15563

W-15562

BOOK DOTS 27cm

lm	K	W	Control	Lens	Dimming
1208	3000	14	On-Off	33°	0-10V* 15278
					DALI* 15279

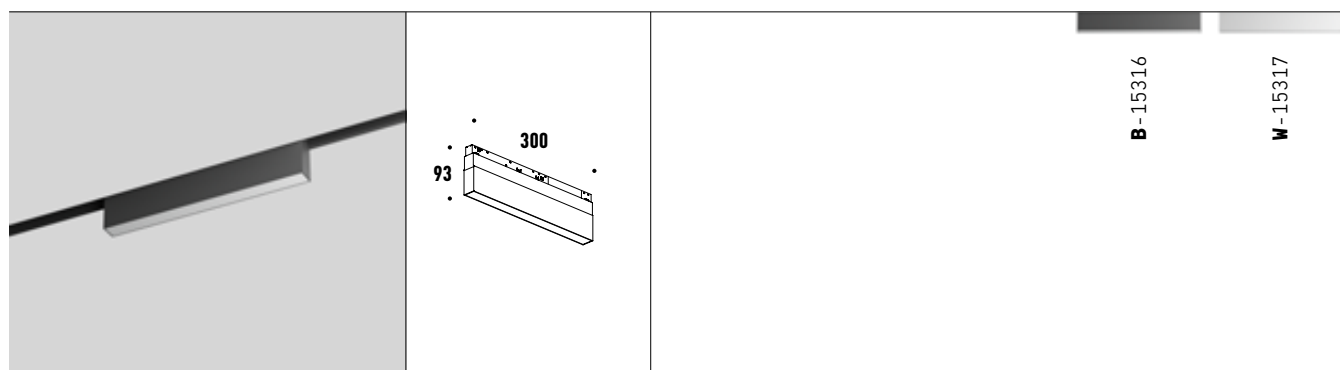

B-15316

W-15317

OUT 30cm

lm	K	W	Control	Lens	Dimming
2180	3000	25	On-Off	90°	0-10V* 15278
					DALI* 15279

* not included


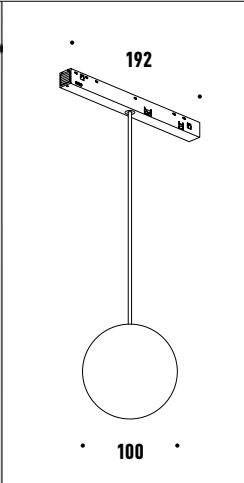

GLASS BALL

- Clean minimal design.
- Diffused light effect.
- Available in different finishes.
- Integration with Low Voltage.
- DALI version available.
- CRI 90.








OPTIONS

		 B-15486
--	--	--

Hanging GLASS BALL

lm	K	W	Control	Lens	Dimming
213	3000	5	On-Off	90°	0-10V* 15278
					DALI* 15279

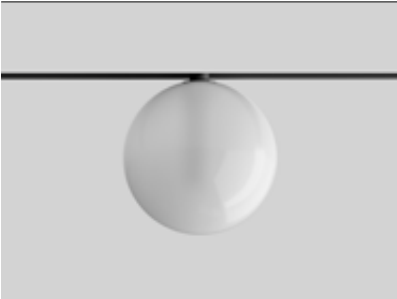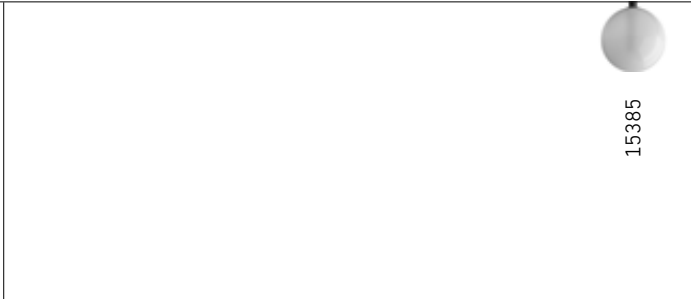		 15385
---	---	---

GLASS BALL

lm	K	W	Control	Lens	Dimming
216	3000	4.5	On-Off	90°	0-10V* 15278
					DALI* 15279

* not included




MOON

- Clean minimal design.
- Diffused light effect.
- Available in different finishes.
- Integration with Low Voltage.
- DALI version available.





OPTIONS

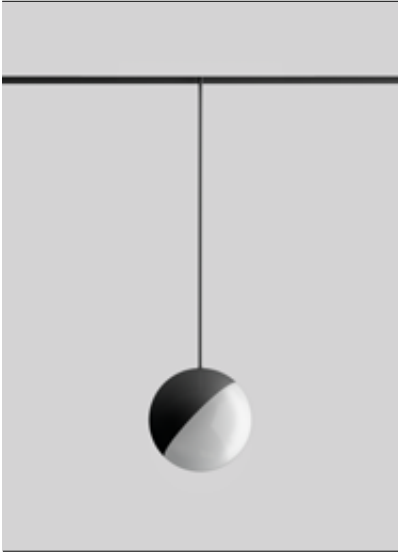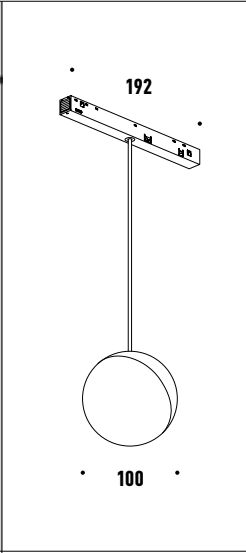						
MOON			Control	Lens	Dimming	
lm	K	W			0-10V* 15278	
260	3000	8			DALI* 15279	


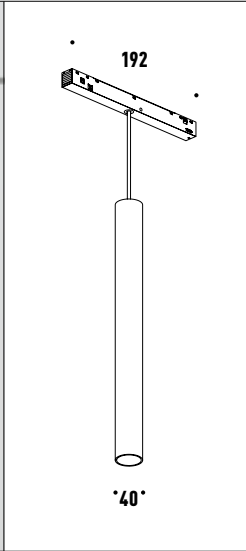
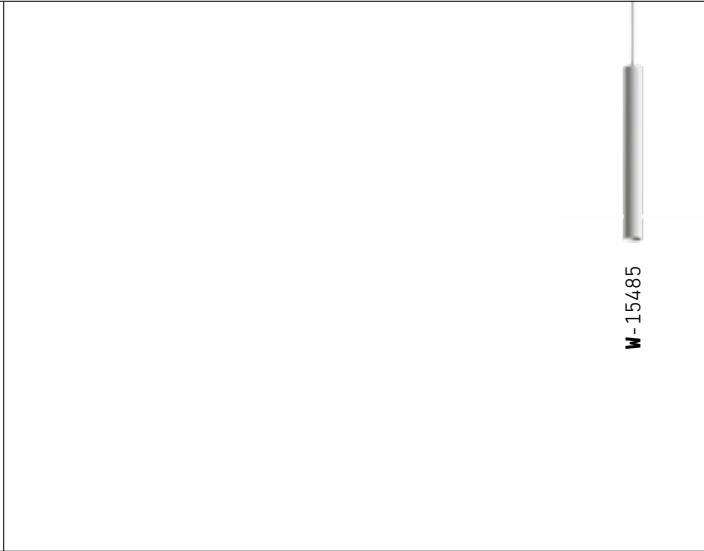
Hanging RAIN

- Clean minimal design.
- Diffused light effect.
- Available in different finishes.
- Integration with Low Voltage.
- DALI version available.
- CRI 90.





OPTIONS

						
Hanging RAIN			Control	Lens	Dimming	
lm	K	W			0-10V* 15278	
476	3000	8			DALI* 15279	
On-Off			27°			

* not included


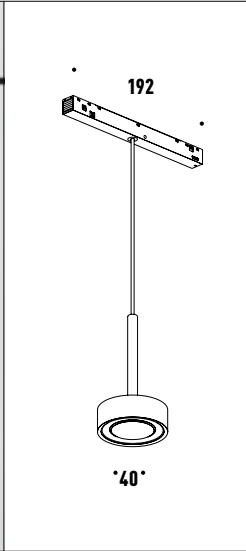
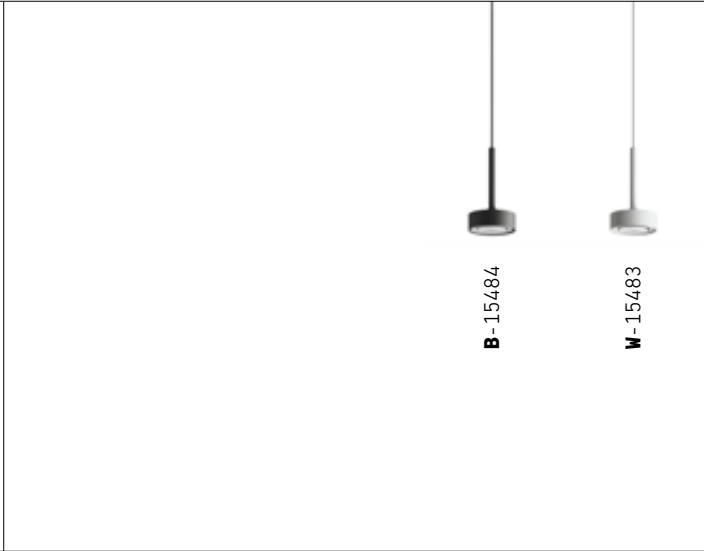
Hanging TOMI

- Clean minimal design.
- Diffused light effect.
- Available in different finishes.
- Integration with Low Voltage.
- DALI version available.
- CRI 90.





OPTIONS

						
Hanging TOMI			Control	Lens	Dimming	
lm	K	W			0-10V* 15278	
624	3000	7			DALI* 15279	
On-Off			49°			

* not included

micro LOW VOLTAGE SYSTEM

An ultra-slim 48V magnetic track system with a 7mm profile for seamless architectural integration. Precision-engineered for recessed, surface, or pendant configurations, its minimalist design features a magnetic click mechanism for effortless reconfiguration. Scalable for high-end residential or commercial spaces, offering modular flexibility with near-invisible hardware.

TON

GLASSBALL

TOMI

LIGHT STRIPE

DOTS




TRACKS



- Low Voltage System.
- Minimal design.
- Different kinds of applications.
- Wide range of accessories.



RECESSED

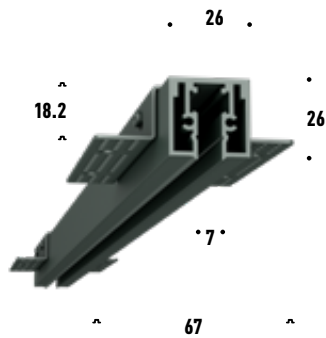

3m TRACK | 15400
Different Lengths | upon request



"L" CONNECTOR | 15401




"L" CONNECTOR IN | 15402



"L" CONNECTOR OUT | 15403

SURFACE/SUSPENDED*

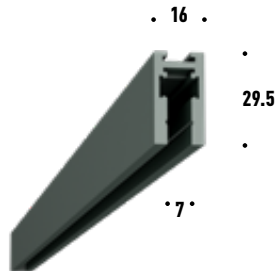


3m TRACK | 15423
Different Lengths | upon request




HANGING KIT* Black | 15427



"L" CONNECTOR | 15424



"L" CONNECTOR IN | 15425



"L" CONNECTOR OUT | 15426




LIVE END | 15407




CONNECTOR | 15406

TRACKS WALL TO WALL

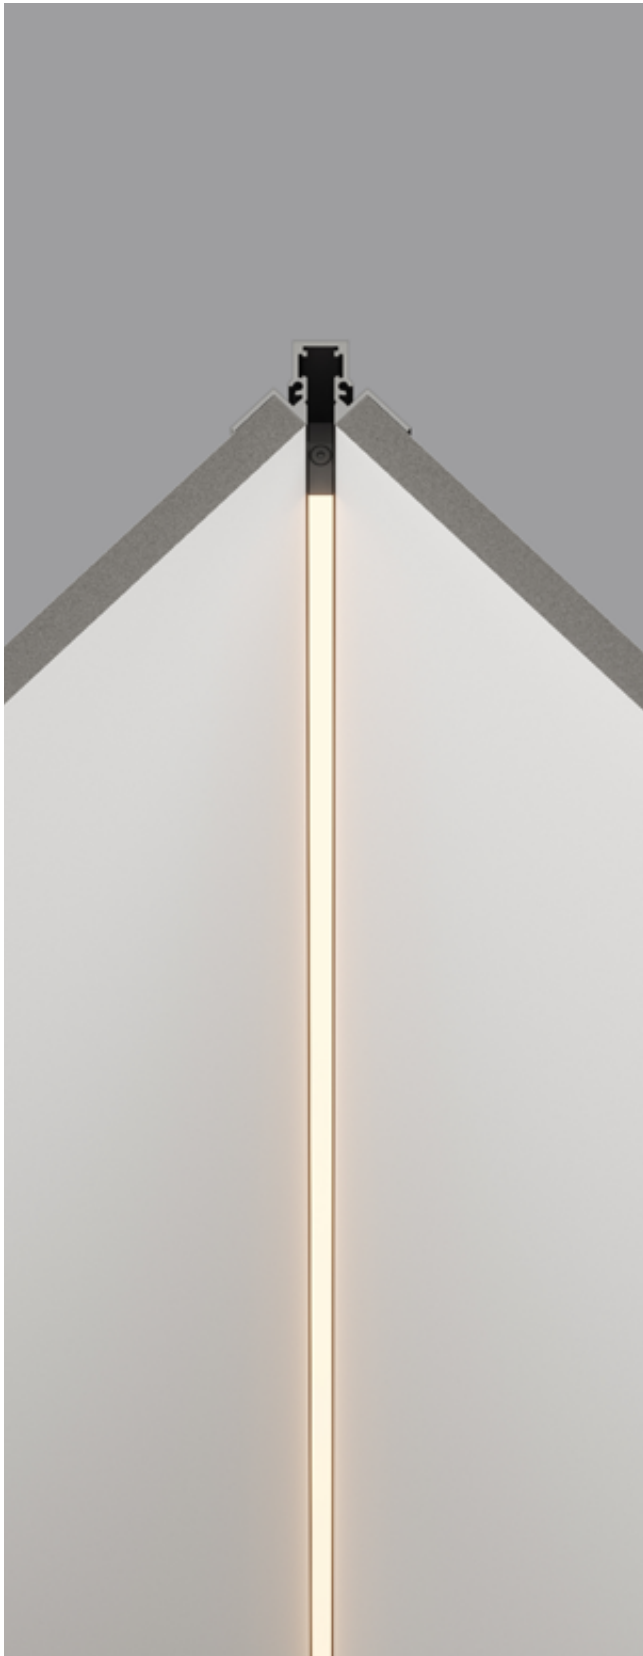


RECESSED - IN

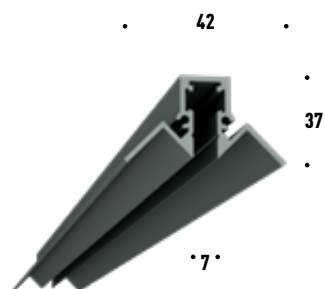

3m TRACK | 15404
Different Lengths | upon request



RECESSED - OUT

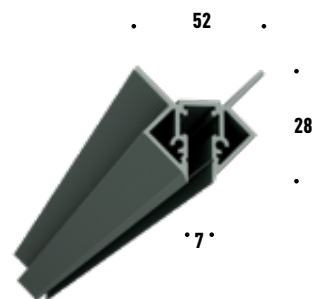

3m TRACK | 15405
Different Lengths | upon request

TON



- Excellent optical control.
- Available in different finishes.
- Integration with Low Voltage.
- CRI 90.



TON 5W				
lm	K	W	Control	Lens
440	3000	5	On-Off	36°

TON 15W				
lm	K	W	Control	Lens
1250	3000	15	On-Off	30°








TOMI



- Excellent optical control.
- Available in different finishes.
- Integration with Low Voltage.
- CRI 90.



OPTIONS

							 Total Black-15418			
TOMI 7W							 Brushed Gold* 15348	 Brushed Rose Gold* 15350	 Brushed Chrome* 15352	 Matt White* 15354
lm	K	W	Control	Lens						
583	3000	7	On-Off	38°	15°* 15346					


* not included

LIGHT STRIPE



- Clean minimal design.
- Diffused light effect.
- Integration with Low Voltage.


OPTIONS

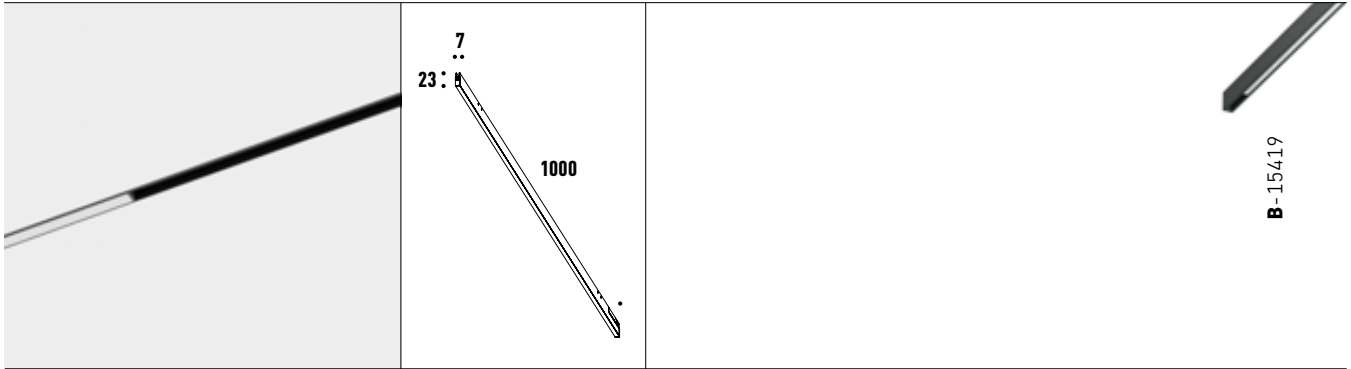

B-15419

LIGHT STRIPE 100cm


lm	K	W	Control
290	3000	10	On-Off

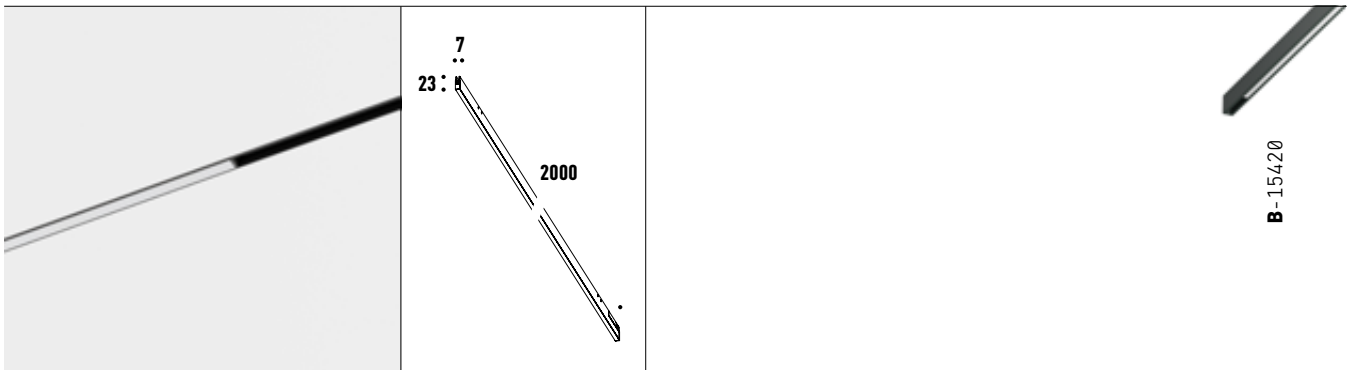

B-15420

LIGHT STRIPE 200cm

lm	K	W	Control
523	3000	20	On-Off

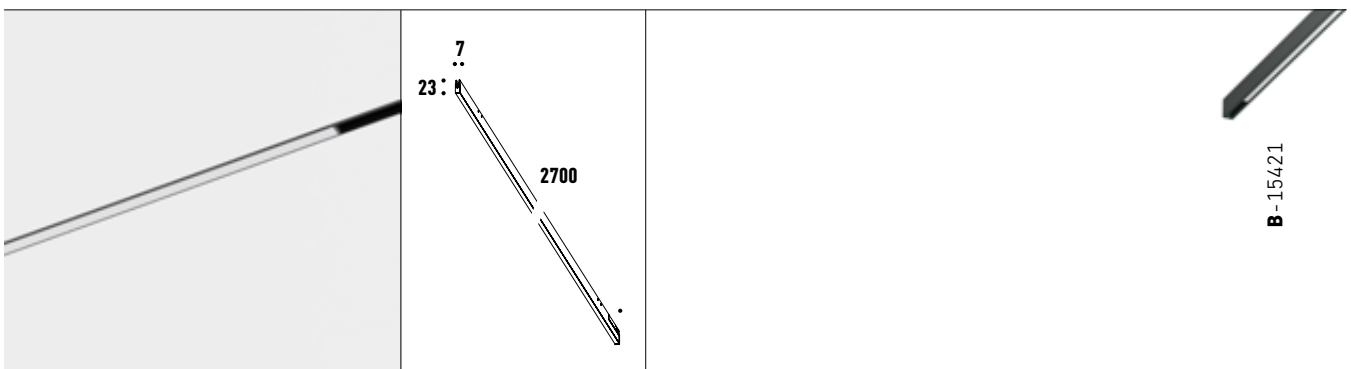


B-15421



LIGHT STRIPE 270cm

lm	K	W	Control
769	3000	30	On-Off

DOTS

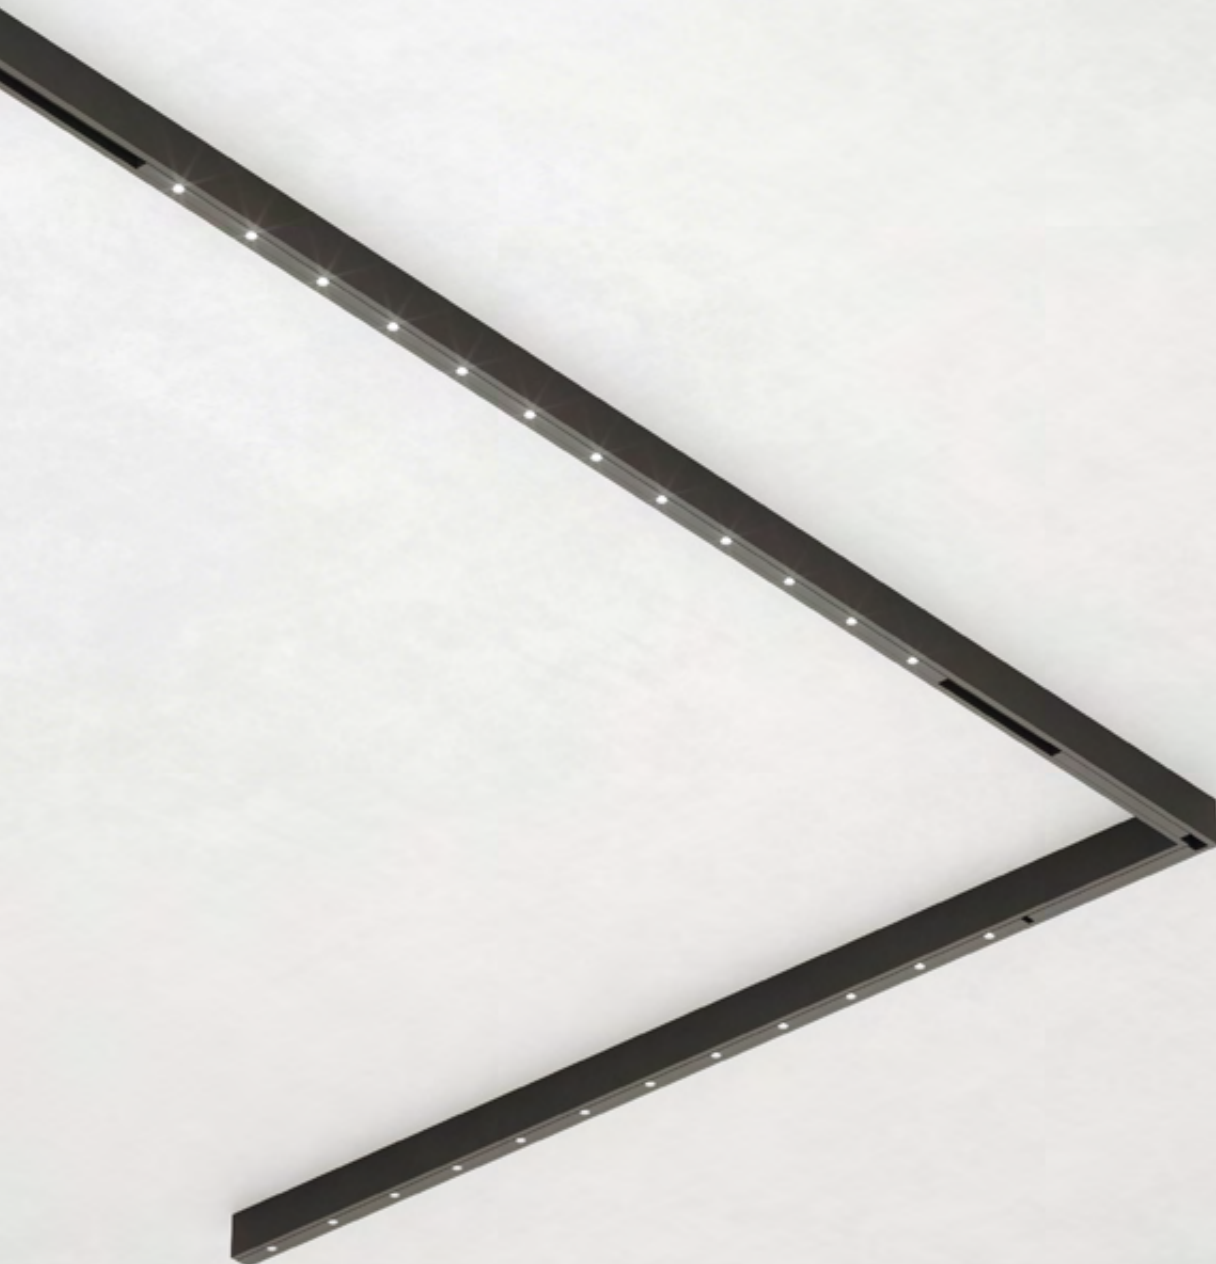

- Excellent optical control.
- Dark Light effect.
- Integration with Low Voltage.
- CRI 90.

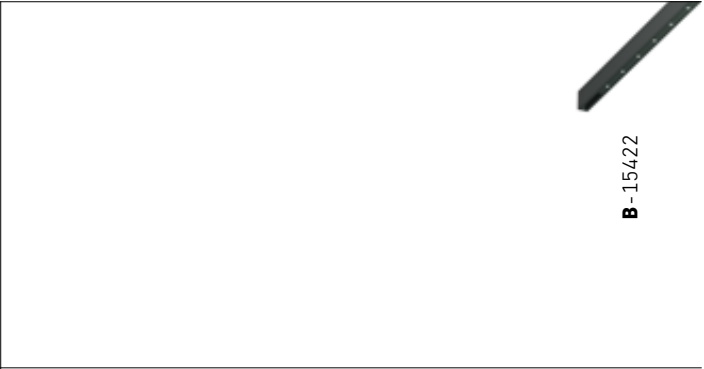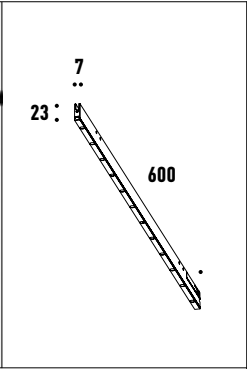


DOTS 60cm

lm	K	W	Control	Lens
448	3000	10	On-Off	76°

GLASS BALL

- Clean minimal design.
- Diffused light effect.
- Glass finish.
- Integration with Low Voltage.



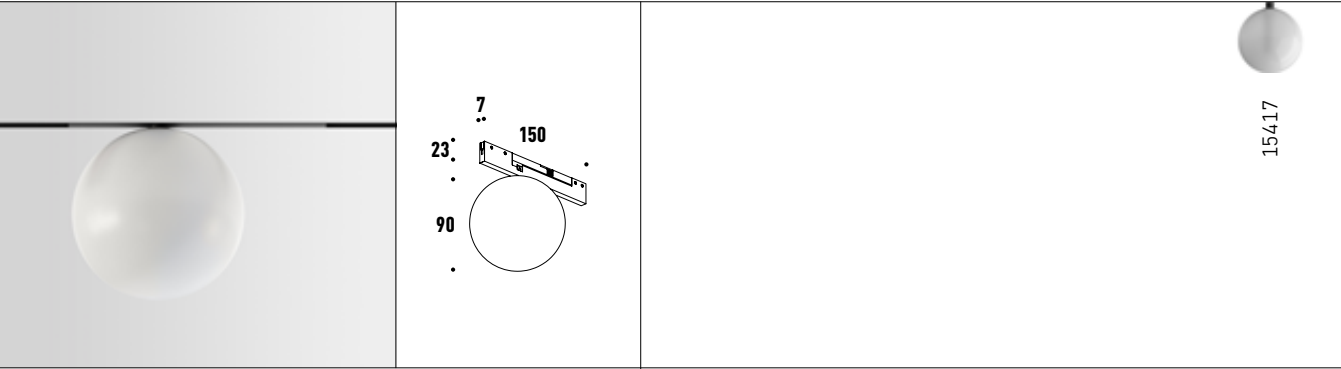

GLASS BALL

lm	K	W	Control	Lens
168	3000	5	On-Off	30°

BRASS

LOW VOLTAGE

SYSTEM

A precision-machined modular system in solid brass, combining minimalism with customization. It features a series of magnetically attached connectors and cylindrical light segments, allowing users to dictate the form and function of the fixture. Available in two colors, this system offers options in luminaire lengths, connectors, and colors, providing endless combinations to meet various needs.

4-BAR

SINGLE BAR

TRIANGLE

CUBE

SQUARE

HEXAGON

LINEAR

2-LINEAR

WALL





4-BAR 60

DIMENSIONS

96mm (w) 96mm (d)
630mm (h)

ELECTRICAL

Power: 5 Watt x4
Lumens: 330 Lumens x4
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15439/15468
15431/15461 (4 pcs)

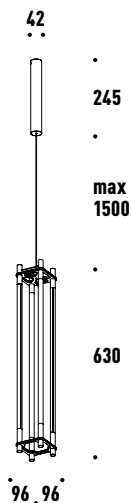

120

DIMENSIONS

96mm (w) 96mm (d)
1230mm (h)

ELECTRICAL

Power: 10 Watt x4
Lumens: 792 Lumens x4
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING


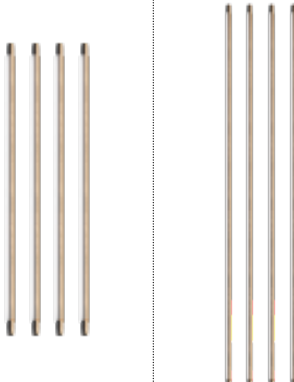

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15439/15468
15432/15462 (4 pcs)

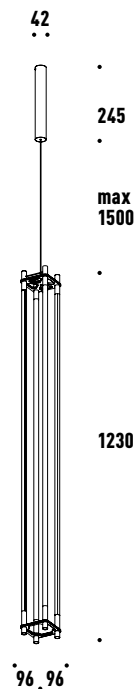

COMPONENTS (required for installation)

			60	120
				
Recessed Kit with Driver 15493			Line 60 15431 (Brass) 15461 (Black)	
			Line 120 15432 (Brass) 15462 (Black)	
Surface Kit with 48V 60W Driver 15433 (Brass) 15463 (Black)			4-BAR Kit 15439 (Brass) 15468 (Black)	

* Optional



SINGLE BAR 35

DIMENSIONS

15mm (ø) 390mm (h)

ELECTRICAL

Power: 3 Watt
Lumens: 230 Lumens
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15440/15469
15430/15460



60

DIMENSIONS

15mm (ø) 630mm (h)

ELECTRICAL

Power: 5 Watt
Lumens: 330 Lumens
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15440/15469
15431/15461



120

DIMENSIONS

15mm (ø) 1185mm (h)

ELECTRICAL

Power: 10 Watt
Lumens: 792 Lumens
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15440/15469
15432/15462

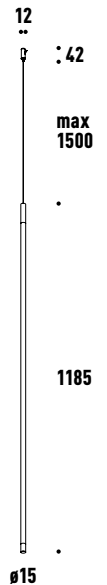

COMPONENTS (required for installation)

					
Recessed Kit with Driver 15493	Surface Kit with 48V 60W Driver 15433 (Brass) 15463 (Black)	Single Bar Kit 15440 (Brass) 15469 (Black)	Line 35 15430 (Brass) 15460 (Black)	Line 60 15431 (Brass) 15461 (Black)	Line 120 15432 (Brass) 15462 (Black)

* Optional



TRIANGLE 60

DIMENSIONS

1170mm (w) 1010mm (d)

ELECTRICAL

Power: 5 Watt x3
Lumens: 330 Lumens x3
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15436/15466
15431/15461 (3 pcs)

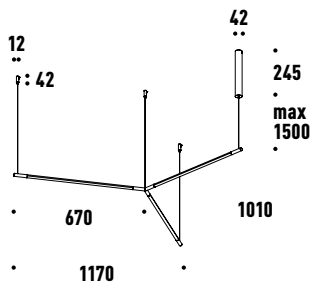

120

DIMENSIONS

2760mm (w) 2650mm (d)

ELECTRICAL

Power: 10 Watt x3
Lumens: 792 Lumens x3
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING






0-10 V*
DALI*

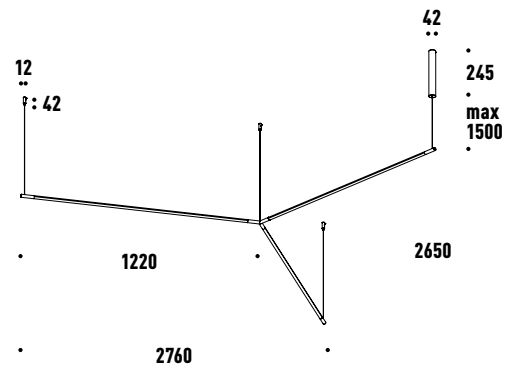COMPONENTS

15493/15433/15463
15436/15466
15432/15462 (3 pcs)



COMPONENTS (required for installation)

				60	120
					
Recessed Kit with Driver	Surface Kit with 48V 60W Driver	Triangle Kit	Line 60	Line 120	
15493	15433 (Brass)	15436 (Brass)	15431 (Brass)	15432 (Brass)	
	15463 (Black)	15466 (Black)	15461 (Black)	15462 (Black)	

* Optional



CUBE 60

DIMENSIONS

685mm (w) 685mm (d)
685mm (h)

ELECTRICAL

Power: 5 Watt x12
Lumens: 330 Lumens x12
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493
15438/15467
15431/16461 (12 pcs)

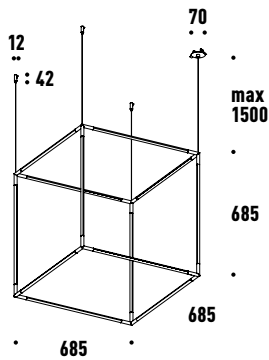

120

DIMENSIONS

1240mm (w) 1240mm (d)
1240mm (h)

ELECTRICAL

Power: 10 Watt x12
Lumens: 792 Lumens x12
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493
15438/15467
15432/15462 (12 pcs)

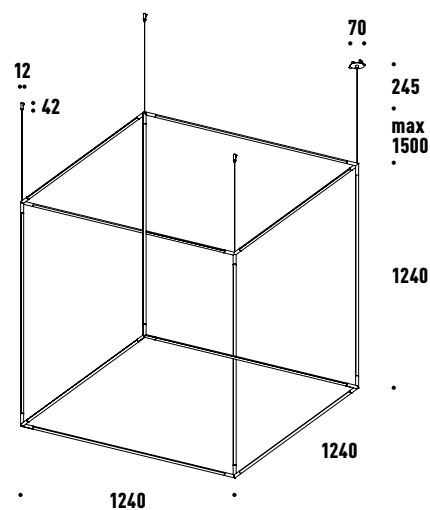

COMPONENTS (required for installation)

60


120




**Recessed Kit
with Driver**
15493



Cube Kit
15438 (Brass)
15467 (Black)



Line 60
15431 (Brass)
15461 (Black)

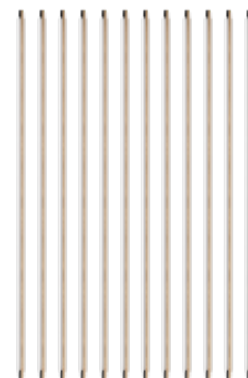

Line 120
15432 (Brass)
15462 (Black)

* Optional



SQUARE 60

DIMENSIONS

670mm (w) 670mm (d)

ELECTRICAL

Power: 5 Watt x4
Lumens: 330 Lumens x4
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15441/15470
15431/15461 (4 pcs)

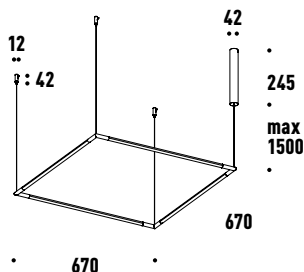

120

DIMENSIONS

1240mm (w) 1240mm (d)

ELECTRICAL

Power: 10 Watt x4
Lumens: 792 Lumens x4
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15441/15470
15432/15462 (4 pcs)

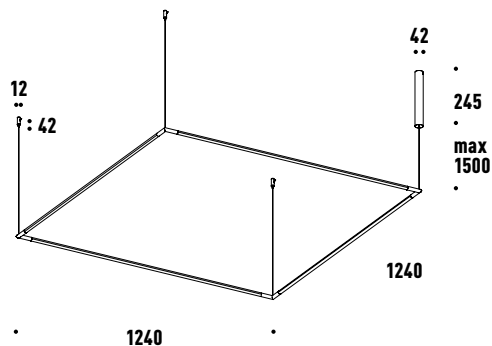

COMPONENTS (required for installation)



**Recessed Kit
with Driver**
15493



**Surface Kit with
48V 60W Driver**
15433 (Brass)
15463 (Black)



Square Kit
15441 (Brass)
15470 (Black)



Line 60
15431 (Brass)
15461 (Black)



Line 120
15432 (Brass)
15462 (Black)

* Optional



HEXAGON 60

DIMENSIONS

1340mm (w) 1180mm (d)

ELECTRICAL

Power: 5 Watt x6
Lumens: 330 Lumens x6
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15435/15456
15431/15461 (6 pcs)

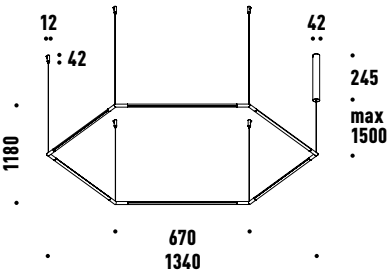

120

DIMENSIONS

2455mm (w) 2135mm (d)

ELECTRICAL

Power: 10 Watt x6
Lumens: 792 Lumens x6
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING






0-10 V*
DALI*

COMPONENTS

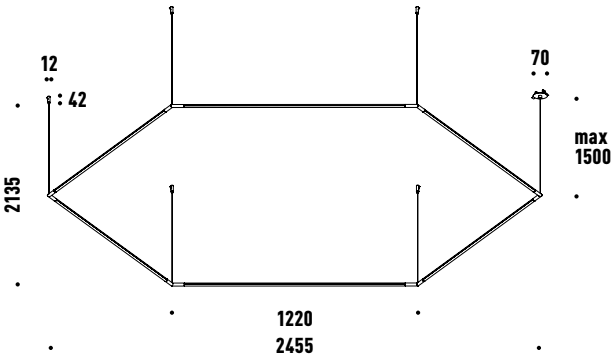15493
15435/15456
15432/15462 (6 pcs)



COMPONENTS (required for installation)

		60		120
				
Recessed Kit with Driver		Surface Kit with 48V 60W Driver		Hexagon Kit
15493		15433 (Brass) 15463 (Black)		15435 (Brass) 15456 (Black)
				
		Line 60		Line 120
		15431 (Brass) 15461 (Black)		15432 (Brass) 15462 (Black)

* Optional



LINEAR 60

DIMENSIONS

685mm (w) 15mm (ø)

ELECTRICAL

Power: 5 Watt
Lumens: 330 Lumens
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15434/15464
15459/15472
15431/15461

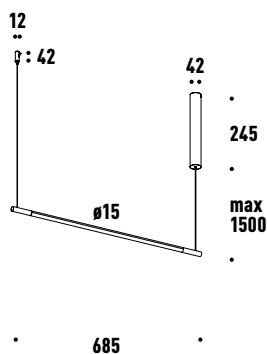

120

DIMENSIONS

1240mm (w) 15mm (ø)

ELECTRICAL

Power: 10 Watt
Lumens: 792 Lumens
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING





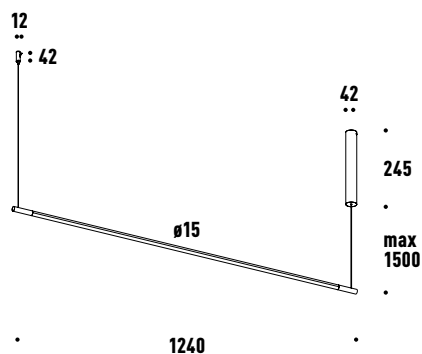

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15434/15464
15459/15472
15432/15462



COMPONENTS (required for installation)

				60	120
					
Recessed Kit with Driver	Surface Kit with 48W Driver	Linear Kit	Extension Kit	Line 60	Line 120
15493	15433 (Brass) 15463 (Black)	15434 (Brass) 15464 (Black)	15459 (Brass) 15472 (Black)	15431 (Brass) 15461 (Black)	15432 (Brass) 15462 (Black)

* Optional



2-LINEAR 60

DIMENSIONS

685mm (w) 96mm (d)
77mm (h)

ELECTRICAL

Power: 5 Watt x2
Lumens: 330 Lumens x2
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15437/15492
15494/15495
15431/15461

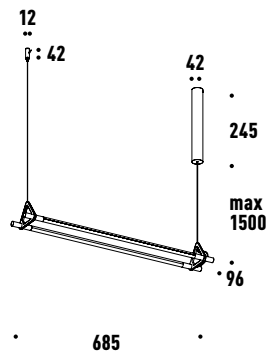

120

DIMENSIONS

1240mm (w) 96mm (d)
77mm (h)

ELECTRICAL

Power: 10 Watt x2
Lumens: 792 Lumens x2
48 V LED
3000 Kelvin
90 CRI
IP20

MATERIAL

Brass

FINISHES


Brushed Brass
Brushed Black

DIMMING





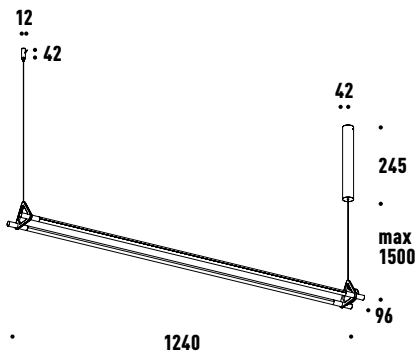

0-10 V*
DALI*

COMPONENTS

15493/15433/15463
15437/15492
15494/15495
15432/15462



COMPONENTS (required for installation)

					
Recessed Kit with Driver	Surface Kit with 48V 60W Driver	2-Linear Kit	Extension Kit	Line 60	Line 120
15493	15433 (Brass) 15463 (Black)	15437 (Brass) 15492 (Black)	15494 (Brass) 15495 (Black)	15431 (Brass) 15461 (Black)	15432 (Brass) 15462 (Black)

* Optional



WALL 35

DIMENSIONS

766mm (w) 48mm (d)
90mm (h)

ELECTRICAL

Power: 3 Watt x2
Lumens: 230 Lumens x2
48 V LED
3000 Kelvin
90 CRI
IP20

FINISHES

Brushed Brass
Brushed Black

DIMMING


0-10 V*
DALI*

MATERIAL

Brass

COMPONENTS

15442/15471

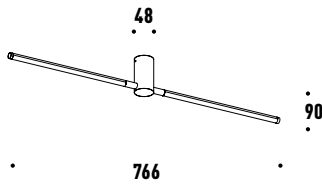

REQUIRED for installation



Wall Kit

15442 (Brass)
15471 (Black)

* not included

OUTDOOR COLLECTION

A precision-machined modular system in solid brass, combining minimalism with customization. It features a series of magnetically attached connectors and cylindrical light segments, allowing users to dictate the form and function of the fixture. Available in two colors, this system offers options in luminaire lengths, connectors, and colors, providing endless combinations to meet various needs.

ANTRO

DELLA

FLATO

RIO

ESTRA

COB TUBE

SMD TUBE

MARS

MODO

VEGA

POLE


FLORA





ANTRO

Modern sophistication meets precise functionality in this versatile wall light, designed for outdoor settings but equally suitable for indoor use. Its adjustable circular lampshade offers a unique 90° rotation, enabling targeted illumination. Crafted with meticulous attention to detail, this luminaire ensures a precise and consistent beam of light, enhancing the ambiance of any space, whether outside or within the comfort of your home.

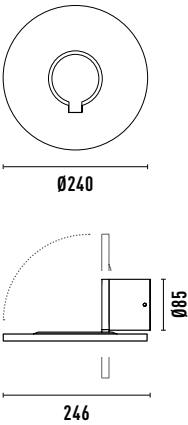




W	°K	Lm	Optics	CRI	Protection
8	3000	500	99°	≥80	IP54

CARTON

dim. L46*W30.5*H31cm
cbm 0.043
pcs. 4
net w. 3.78kg
gross w. 6.26kg

FINISHES / SKU

Black	White	Graphite
		
15539	15540	15541

FEATURES


- Features a movement system enabling a full 90° rotation.
- Die-cast aluminum body.
- LED light source included.
- Equipped with a 5-meter double cable gland for flexible electrical connection.





DELLA

Crafted from die-cast aluminum, this luminaire epitomizes durability for outdoor settings. Featuring an frosted glass diffuser, it promises a gentle and even luminosity. Integrating advanced LED technology with a polished design, Della gracefully complements any outdoor space, offering both resilience and unparalleled aesthetic allure.

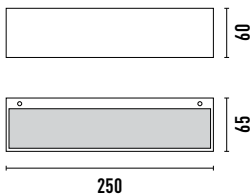






W	°K	Lm	Optics	CRI	Protection
7	3000	668	110°	≥80	IP65

CARTON

dim. L37.5*W19.5*H31.5cm
cbm 0.023
pcs. 8
net w. 9kg
gross w. 10.5kg

FINISHES / SKU

Black	White	Graphite
		
15545	15546	15547
Wood	Stone	
		
15548	15549	

FEATURES


- Die-cast aluminum body.
- Crafted with high-quality, frosted glass.
- LED light source included.
- Equipped with a 5-meter double cable gland for flexible electrical connection.





DELLA UP/DOWN

Offering captivating dual-directional illumination, this outdoor wall light enhances any exterior setting. Boasting an IP65 protection rating, it stands resilient against diverse weather conditions. Crafted from durable die-cast aluminum, the luminaire seamlessly combines lasting durability with modern elegance.






W	°K	Lm	Optics	CRI	Protection
14	3000	1140	110°	≥80	IP65

CARTON

dim. L37.5*W19.5*H31.5cm
cbm 0.023
pcs. 8
net w. 8.8kg
gross w. 10.6kg

FINISHES / SKU

Black	White	Graphite
		
15542	15543	15544

FEATURES


- Die-cast aluminum body.
- Crafted with high-quality, frosted glass.
- LED light source included.
- Equipped with a 5-meter double cable gland for flexible electrical connection.





FLATO

Crafted for sophistication and durability, this dual-emission LED wall luminaire showcases a premium aluminum finish, complemented by an IP65 rating for robust dust and water resistance. Designed for technical efficiency, it offers straightforward screw-fixed mounting to any wall.





W	°K	Lm	Optics	CRI	Protection
10	3000	950	-	≥80	IP65

CARTON

dim. L41.5*W39*H20cm
cbm 0.032
pcs. 18
net w. 10.3kg
gross w. 10.46kg

FINISHES / SKU

White	Black
	
15512	15513

FEATURES


- Die-cast aluminum body.
- Fitted with high-quality acrylic diffuser.
- LED light source included.
- Equipped with a 5-meter double cable gland for flexible electrical connection.





FLATO MINI

Presenting a compact, dual-emission LED wall luminaire, this minimalist design is defined by its superior aluminum finish and IP65 certification, ensuring dust and water resistance. Its installation is streamlined with a simple, screw-fixed method suitable for various wall surfaces.





W	°K	Lm	Optics	CRI	Protection
6	3000	540	-	≥80	IP65

CARTON

dim. L39*W33.5*H20cm
cbm 0.026
pcs. 18
net w. 8.46kg
gross w. 12.66kg

FINISHES / SKU

White	Black
	
15510	15511

FEATURES


- Die-cast aluminum body.
- Fitted with high-quality acrylic diffuser.
- LED light source included.
- Equipped with a 5-meter double cable gland for flexible electrical connection.





RIO

Featuring a cuboid shape that elegantly emits light from both ends, this surface light is ideal for lighting entrances, terraces, or garages. Its durable aluminum construction, complete with IP54 protection, ensures durability. Available in various wood or stone finishes, it seamlessly complements any outdoor environment.








W	°K	Lm	Optics	CRI	Protection
14	3000	1365	73°	≥80	IP54

CARTON

dim. L33.5*W19.5*H23cm
 cbm 0.015
 pcs. 12
 net w. 9.3kg (15521/15522/15523)
 11.4kg (15524/15525)
 gross w. 10.1kg (15521/15522/15523)
 12.5kg (15524/15525)

FINISHES / SKU

Black	White	Graphite
		
15521	15522	15523
Wood	Stone	
		
15524	15525	

FEATURES


- Die-cast aluminum body.
- Incorporates premium clear glass for optimal clarity.
- LED light source included.
- Equipped with a 5-meter double cable gland for flexible electrical connection.





RIO MINI

Capturing the essence of its larger version, the RIO MINI surface light, designed in a sleek cuboid shape, emits light downward, creating an ambient and safe environment. Ideal for entrances, terraces, or garage facades, this fixture is encased in durable aluminum and boasts IP54 protection, guaranteeing resilience against various weather conditions.






W	°K	Lm	Optics	CRI	Protection
7	3000	577	72°	≥80	IP54

CARTON

dim. L28.5*W22.5*H24cm
cbm 0.015
pcs. 18
net w. 10.4kg
gross w. 12kg

FINISHES / SKU

Black	White	Graphite
		
15526	15527	15528

FEATURES


- Die-cast aluminum body.
- Incorporates premium clear glass for optimal clarity.
- LED light source included.
- Equipped with a 5-meter double cable gland for flexible electrical connection.





ESTRA E27

With a focus on the illuminant, the Estra wall light stands as an eye-catcher due to its simple yet elegant design. Merging sophistication with efficiency, it brightens outdoor spaces with precision. Moreover, its IP54 protection rating ensures that this sleek piece remains resilient against diverse weather conditions, affirming its reliability for outdoor installations.

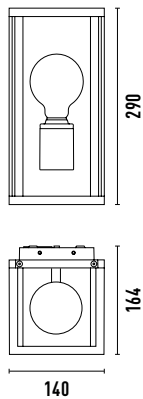

W	°K	Lm	Optics	CRI	Protection
E27 max 15W	-	-	-	-	IP54

CARTON

dim. L38.5*W26.5*H48cm
cbm 0.049
pcs. 2
net w. 4.4kg (15535), 4.91kg (15536)
gross w. 6.2kg (15535), 6.72kg (15536)

FINISHES / SKU

Graphite	Wood
	
15535	15536

FEATURES


- Die-cast aluminum body.
- Crafted with high-quality, tempered glass.
- Includes an E27 bulb socket (bulb not provided).
- Equipped with a 5-meter double cable gland for flexible electrical connection.





COB TUBE

Featuring an IP54 rating, COB TUBE is perfectly suited for both indoor and outdoor use, including in wet areas. It offers two anti-glare options, CONE and RING, to enhance visual comfort in various settings. With a selection of finishes for inserts and housings, COB TUBE allows for customizable, aesthetically pleasing configurations. Its design is centered on versatility and technical precision, making it an ideal lighting solution for a wide range of architectural styles.











W	°K	Lm	Optics	CRI	Protection
8	3000	655	24°	≥90	IP54

CARTON

dim. L50*W40*H21cm
 cbm 0.042
 pcs. 40
 net w. 13.6kg
 gross w. 15.8kg

FINISHES / OPTIONS / SKU

Total White			Total Black		
					
15301			15302		
					
White*	Black*	Gold*	White*	Black*	Gold*
15303	15304	15305	15306	15307	15308

FEATURES

- Die-cast aluminum body.
- TRIAC dimmable for adjustable light intensity.
- COB LED light source included.
- Equipped with a 5-meter double cable gland for flexible electrical connection.




* not included




SMD TUBE 10/15/20W

SMD TUBE, with its IP54 rating, is versatile for both indoor and outdoor settings. Featuring a sleek, painted aluminum cylinder in three finishes, it employs SMD backlighting for consistent, inviting light quality, enhanced by superior diffusers. Ideal for various environments, it seamlessly integrates into any design context, enhancing spaces with its elegant illumination.


10W | 15080/
15081/15082



15W | 15083/
15084/15085



20W | 15086/
15087/15088

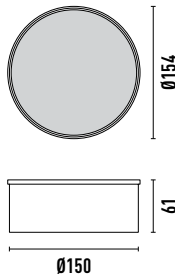










W	°K	Lm	Optics	CRI	Protection
10	3000	900	90°	≥90	IP54
15	3000	1200	90°	≥90	IP54
20	3000	1700	90°	≥90	IP54

CARTON

dim. L53.5*W22*H38cm (15080/15081/15082)
L68*W28*H32.5cm (15083/15084/15085)
L34*W34*H40cm (15086/15087/15088)
cbm 0.045 (15080/15081/15082)
0.062 (15083/15084/15085)
0.046 (15086/15087/15088)
pcs. 50 (15080/15081/15082)
40 (15083/15084/15085)
20 (15086/15087/15088)
net w. 15kg (15080/15081/15082)
18.4kg (15083/15084/15085)
12.8kg (15086/15087/15088)
gross w. 18.1kg (15080/15081/15082)
21.4kg (15083/15084/15085)
15kg (15086/15087/15088)

FINISHES / SKU

	White	Black	Gold
10W			
	15080	15081	15082
15W			
	15083	15084	15085
20W			
	15086	15087	15088

FEATURES

- Die-cast aluminum body.
- Equipped with an acrylic diffuser for a soft light effect.
- LED light source included.
- Equipped with a 5-meter double cable gland for flexible electrical connection.







MARS 18/30W

Featuring a refined design, this surface lamp delivers technical sophistication. Its soft yet effective illumination, complemented by an IP54 rating, renders it ideal for varied environments, indoors or outdoors. Available in two distinct sizes, its adaptable structure ensures seamless integration into any architectural context, providing a blend of functionality and elegance.

18W | 15514/15515

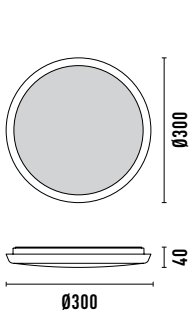

30W | 15516/15517

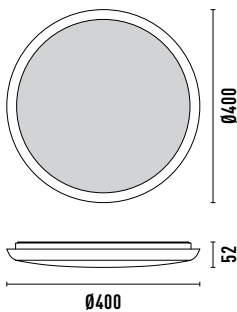

W	°K	Lm	Optics	CRI	Protection
18	3000	1800	120°	≥80	IP54
30	3000	3200	120°	≥80	IP54

CARTON

dim. L53*W31.5*H33cm (15514/15515)
L63*W41.5*H43cm (15516/15517)
cbm 0.055 (15514/15515)
0.112 (15516/15517)
pcs. 10 (15514/15515/15516/15517)
net w. 8kg (15514/15515)
14kg (15516/15517)
gross w. 10.8kg (15514/15515)
18.84kg (15516/15517)

FINISHES / SKU

	White	Black
18W		
	15514	15515
30W		
	15516	15517

FEATURES


- Equipped with an acrylic diffuser for a soft light effect.
- LED light source included.
- Equipped with a 5-meter double cable gland for flexible electrical connection.





MODO

Boasting a minimalist cubic design, this IP65-rated outdoor surface-mounted luminaire integrates energy-efficient LED technology behind a glass diffuser. It casts a gentle yet brilliant light, making it a versatile and decorative element for various outdoor settings.






W	°K	Lm	Optics	CRI	Protection
8	3000	593	49°	≥80	IP65

CARTON

dim. L37.5*W26*H29cm
cbm 0.028
pcs. 12
net w. 9.6kg
gross w. 11.3kg

FINISHES / SKU

Black	White	Graphite
		
15529	15530	15531

FEATURES


- Die-cast aluminum body.
- LED light source included.
- Equipped with a 5-meter double cable gland for flexible electrical connection.





MODO MINI

This compact version of the outdoor surface-mounted luminaire features an IP65 rating and a minimalist cubic design. It combines energy-efficient LED technology with a frosted glass diffuser, offering both gentle and brilliant illumination. This makes it a versatile and attractive decorative element for a variety of outdoor areas.






W	°K	Lm	Optics	CRI	Protection
4	3000	154	52°	≥80	IP65

CARTON

dim. L37.5*W19.5*H26cm
cbm 0.019
pcs. 18
net w. 5.6kg
gross w. 7.3kg

FINISHES / SKU

Black	White	Graphite
		
15532	15533	15534

FEATURES


- Die-cast aluminum body.
- LED light source included.
- Equipped with a 5-meter double cable gland for flexible electrical connection.





VEGA

Designed to enhance both aesthetics and safety in walkways, this recessed wall luminaire is ideal for outdoor use, including installation on house facades. Constructed from durable aluminum, it is accompanied by a housing that serves as a mold for concrete installation, seamlessly integrating LED technology for functional elegance.





W	°K	Lm	Optics	CRI	Protection
9	3000	190	42°	≥80	IP65

CARTON

dim. L44*W29*H35cm
cbm 0.045
pcs. 12
net w. 8.1kg
gross w. 10.7kg

FINISHES / SKU

White	Graphite
	
15537	15538

FEATURES


- Die-cast aluminum body.
- LED light source included.
- Equipped with a 5-meter double cable gland for flexible electrical connection.





STICK

This versatile pole light family, adjustable up to 3 meters, is designed to enhance and guide through outdoor spaces. Its multi-axis adjustments and capacity for multiple 'Stick heads' ensure well-lit pathways, making it a perfect tool for illuminating and defining the functions of various areas. Easy to install in gardens, terraces, and more, it suits both tranquil and social settings. With mounting options for walls, ceilings, and floors, it offers a complete and adaptable lighting solution.

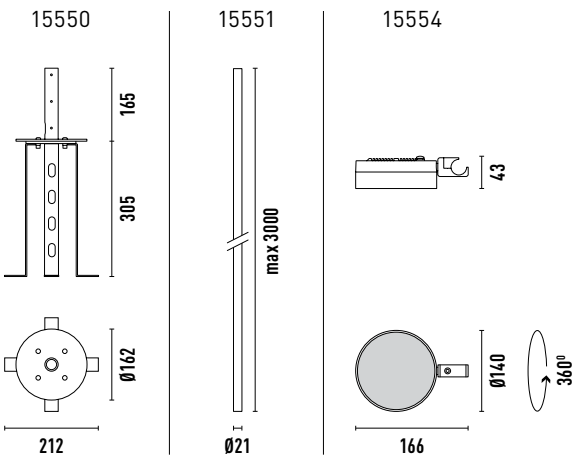

W	°K	Lm	Optics	CRI	Protection
10	3000	694	36°	≥90	IP65

CARTON

dim. L49.5*W26.5*H27cm (15550)
 L305*W22*H16.5cm (15551)
 L64.5*W32*H26.5cm (15554)
 cbm 0.035 (15550), 0.111 (15551),
 0.055 (15554)
 pcs. 1 (15550), 25 (15551), 20 (15554)
 net w. 2.4kg (15550), 29.3kg (15551),
 12kg (15554)
 gross w. 2.9kg (15550), 37.2kg (15551),
 13.8kg (15554)

FINISHES / SKU

Black

15550	15551	15554

FEATURES


- Features a movement system enabling a full 360° rotation in one axis.
- Die-cast aluminum body.
- Base Stick (15550) comes with 2 End Caps.
- Pole Stick (15551) comes with 2 End Caps.
- LED light source included.
- Equipped with a 5-meter double cable gland for flexible electrical connection.





STICK^{SHORT}

This compact version of Stick Family, ideal for pathway and area lighting, brings focused illumination to outdoor spaces. Customizable up to a shorter height, it's specifically designed for floor installation. It effectively lights up walkways and specific areas, enhancing safety and ambiance. Easy to install, it's perfectly suited for lighting up gardens and open spaces with its targeted and efficient illumination.

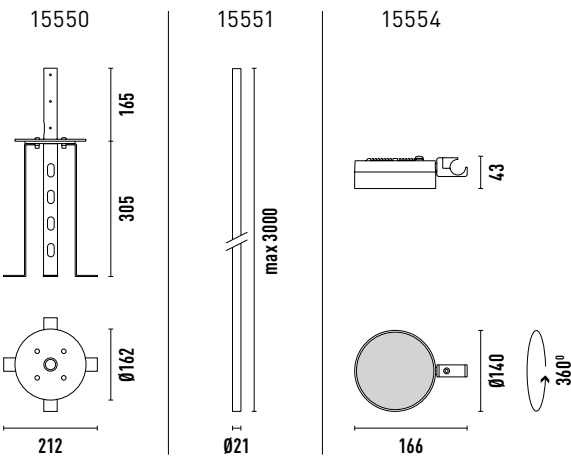

W	°K	Lm	Optics	CRI	Protection
10	3000	694	36°	≥90	IP65

CARTON

dim. L49.5*W26.5*H27cm (15550)
 L305*W22*H16.5cm (15551)
 L64.5*W32*H26.5cm (15554)
 cbm 0.035 (15550), 0.111 (15551),
 0.055 (15554)
 pcs. 1 (15550), 25 (15551), 20 (15554)
 net w. 2.4kg (15550), 29.3kg (15551),
 12kg (15554)
 gross w. 2.9kg (15550), 37.2kg (15551),
 13.8kg (15554)

FINISHES / SKU

Black

15550	15551	15554

FEATURES


- Features a movement system enabling a full 360° rotation in one axis.
- Die-cast aluminum body.
- Base Stick (15550) comes with 2 End Caps.
- Pole Stick (15551) comes with 2 End Caps.
- LED light source included.
- Equipped with a 5-meter double cable gland for flexible electrical connection.





STICK WALL/CEILING

Enhancing the versatile Stick Family, this model includes a specially designed wall/ceiling base, facilitating seamless installation both indoors and outdoors. Ideal for wall and ceiling applications, it provides harmonious lighting to elevate the ambiance of any space, from outdoor patios to indoor corridors. Its adaptable design ensures focused illumination coupled with aesthetic appeal, making it an exemplary choice for a range of lighting scenarios.

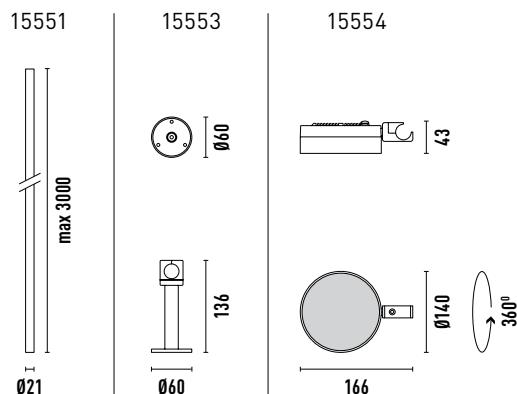

W	°K	Lm	Optics	CRI	Protection
10	3000	694	36°	≥90	IP65

CARTON

dim. L305*W22*H16.5cm (15551)
 L50*W38*H23cm (15553)
 L64.5*W32*H26.5cm (15554)
 cbm 0.111 (15551), 0.044 (15553),
 0.055 (15554)
 pcs. 25 (15551), 30 (15553), 20 (15554)
 net w. 29.3kg (15551), 7.8kg (15553),
 12kg (15554)
 gross w. 37.2kg (15551), 9.8kg (15553),
 13.8kg (15554)

FINISHES / SKU

Black

15551	15553	15554

FEATURES


- Features a movement system enabling a full 360° rotation in one axis.
- Die-cast aluminum body.
- Pole Stick (15551) comes with 2 End Caps.
- Wall/Ceiling Base (15553) comes with 2 End Caps.
- LED light source included.
- Equipped with a 5-meter double cable gland for flexible electrical connection.





FLORA

This inground floor light, designed for illuminating pathways and highlighting architectural and natural elements, epitomizes energy efficiency and superior visual comfort. Its minimized form factor is paired with excellent color quality. Utilizing advanced optics and lenses, it offers a range of light distributions. Highly reliable, it boasts adjustability options and robust resistance to diverse weather conditions and wear.

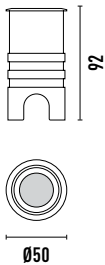

W	°K	Lm	Optics	CRI	Protection
5	3000	151	36°	≥90	IP67

CARTON

dim. L67*W34*H22.5cm
 cbm 0.051
 pcs. 20
 net w. 11.6kg
 gross w. 13.4kg

FINISHES / SKU

Black

15555

FEATURES

- Stainless steel body.
- LED light source included.
- Equipped with a 5-meter double cable gland for flexible electrical connection.







HEADQUARTER

Beit Ha-Defus St. 12
9548315 Jerusalem
Israel

SHOWROOM

Hatnufa 7 St.
9342207 Jerusalem
Israel

LOGISTIC CENTER

Tsela ha-Har St. 47
7178127 Modein
Israel

T +972 (2) 6727811/2
F +972 (2) 6727813

office@clight-led.com
export@clight-led.com

Clight
by **Cabasso Group**

www.clight-led.com