

LIGHT  
COLLECTION  
TION

Clight



Clight

## **We Are C-LIGHT**

Being a young company, we always focus on the most advanced LED technology.

As all relevant development processes are carried out in house, we can produce custom designs and create new collections followed by the latest trends quickly and flexibly.

### **DESIGNED in EUROPE MADE in CHINA**


C-light factory is located in Zhongshan China. The lowered cost that we achieved is being passed directly on to you.

C-light has been working with European lighting designers to develop custom lights of the highest technical standard. C-light uses the best materials in the market with Hardness Quality Checks for each product. The result is Premium Quality with reasonable price.




---

## SMD Downlights | 06



BRI | 08




BRIS | 12




SELINE | 16

---


## COB Downlights | 20




CONE | 22



MINI | 26



MINI LENS | 30




RING DOTS | 34

---


## IP54 Lights | 38




RON | 40



TORI | 44



COB TUBE | 48




SMD TUBE | 52

---


## SPOT Lights | 56



TOMI | 58




TORRES | 64




TUBE | 70

---


## STEP Lights | RECESSED | 74



MINI LINE | 76



MINI DROP | 80




MINI SQUARE | 80




---

## READING Lights | 82



NICK | 84



NOVA | 88

---


## SUSPENDED Lights | 92



JENNY | 94




JIMI | 98



MOON | 102

---

## DOTTA Recessed Luminaires | 106



ACYRLIC | 110



CONE | 112



SQUARE | 114




SPOT | 116




WALL-WASHER | 118

---


## FLOW Low Voltage System | 120




TRACKS | 122




TON | 128




TOMI | 130




LIGHT STRIPE | 132



DOTS | 134



OUT/BOOK | 136



MOON/GLASSBALL | 138

---

# SMD DOWNLIGHTS

BRI  
BRIS

SELINE





Erhan Yavuz


# BRI



## SMD Downlight


A modern and elegant design, which complements the surrounding style. These recessed downlights create uniform light distribution for use in general lighting applications. The depth creates an anti glare effect. Available in three sizes.



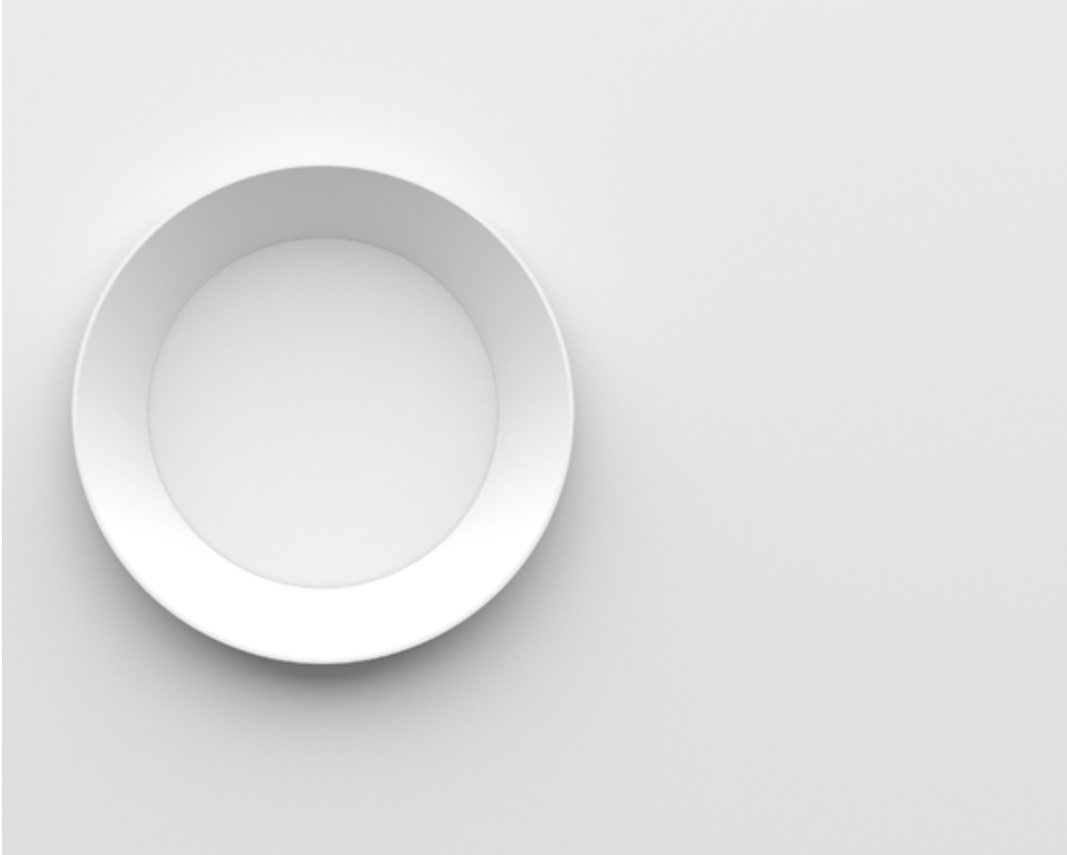


- High quality diffuser
- Integrated SMD backlight
- Bold aluminum frame




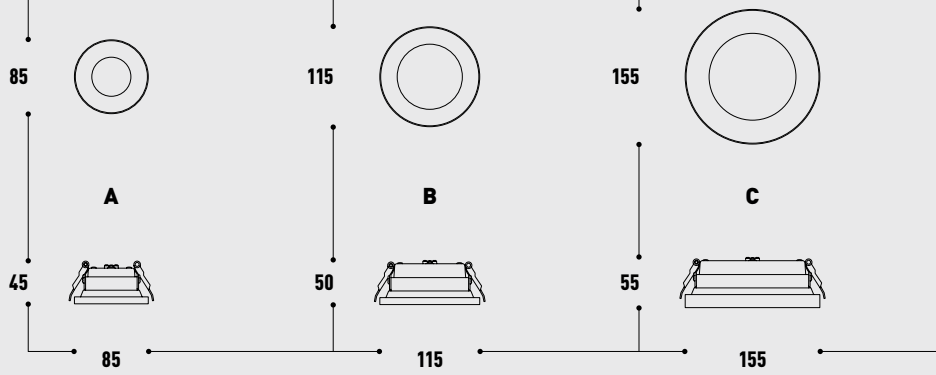

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
SMD	270	3000	3.5	350	90°	75	A	White	15001
								Black	150011
SMD	1125	3000	11	350	94°	105	B	White	15002
								Black	150022
SMD	1725	3000	17	350	92°	145	C	White	15003
								Black	150033

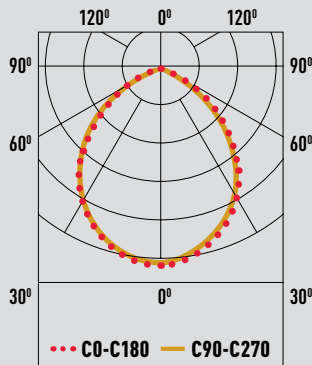


DIAM	LUX	DIST
2.0 m	139 lx	1 m
2.2 m	467 lx	
2.1 m	560 lx	
4.1 m	35 lx	2 m
4.3 m	117 lx	
4.3 m	140 lx	
6.1 m	15 lx	3 m
6.5 m	52 lx	
6.3 m	62 lx	
8.1 m	9 lx	4 m
8.6 m	29 lx	
8.4 m	35 lx	



CARTON	Size	PCS	CBM	kg
	(L*W*H) cm			
A	47.5*38*24.5	60	0.044	10.8
B	50*26*32	40	0.041	12.4
C	50*34*37	30	0.062	12.4

# BRIS



## SMD Downlight


BRIS is a recessed collection with SMD backlight. The product comes with a high quality diffuser that spreads soft and warm light to the space. The depth creates an anti glare effect. It is perfect for private interiors and public buildings. Three sizes to choose from.






- High quality diffuser
- Integrated SMD backlight
- Aluminum body




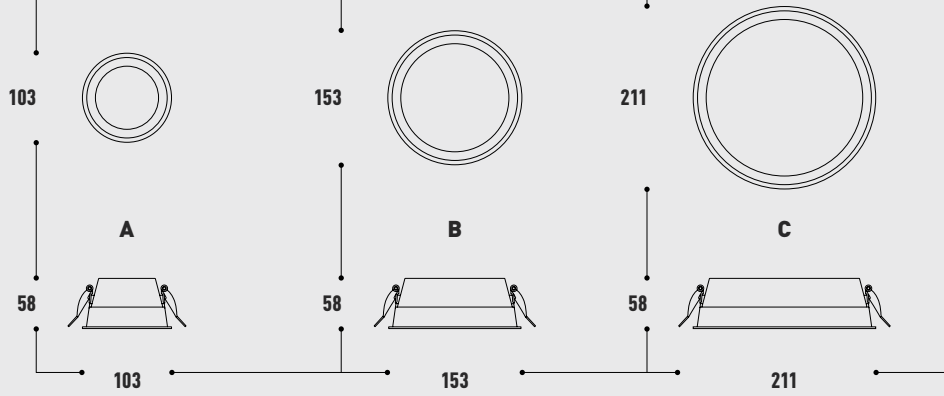

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
SMD	940	3000	10	300	90°	98	A	White	15004
								Black	150044
SMD	1400	3000	16	300	100°	148	B	White	15005
								Black	150055
SMD	1870	3000	24	300	100°	206	C	White	15006
								Black	150066

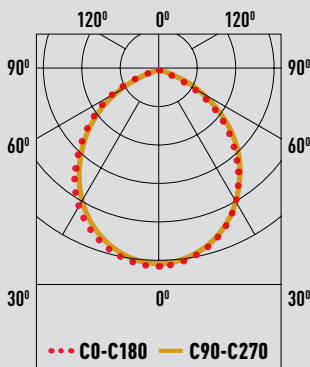


DIAM	LUX	DIST	
2.0 m	349 lx	1 m	A B C
2.3 m	582 lx		
2.4 m	819 lx		
4.1 m	87 lx	2 m	
4.7 m	145 lx		
4.9 m	205 lx		
6.1 m	39 lx	3 m	
7.0 m	65 lx		
7.3 m	91 lx		
8.1 m	22 lx	4 m	
9.4 m	37 lx		
9.8 m	51 lx		




CARTON	Size	PCS	CBM	kg
	(L*W*H) cm			
A	63.5*28*35	60	0.062	14.4
B	64*38*34	40	0.082	18.8
C	50*38.5*46	24	0.088	15


# SELINE




## SMD Downlight

SELINE is a refined integrated led spot light, with a minimalist design frame. Built with SMD backlight, it is equipped with a high quality diffuser that spreads soft and warm light to the space. These downlights come in three sizes. Available in sandy white or black.

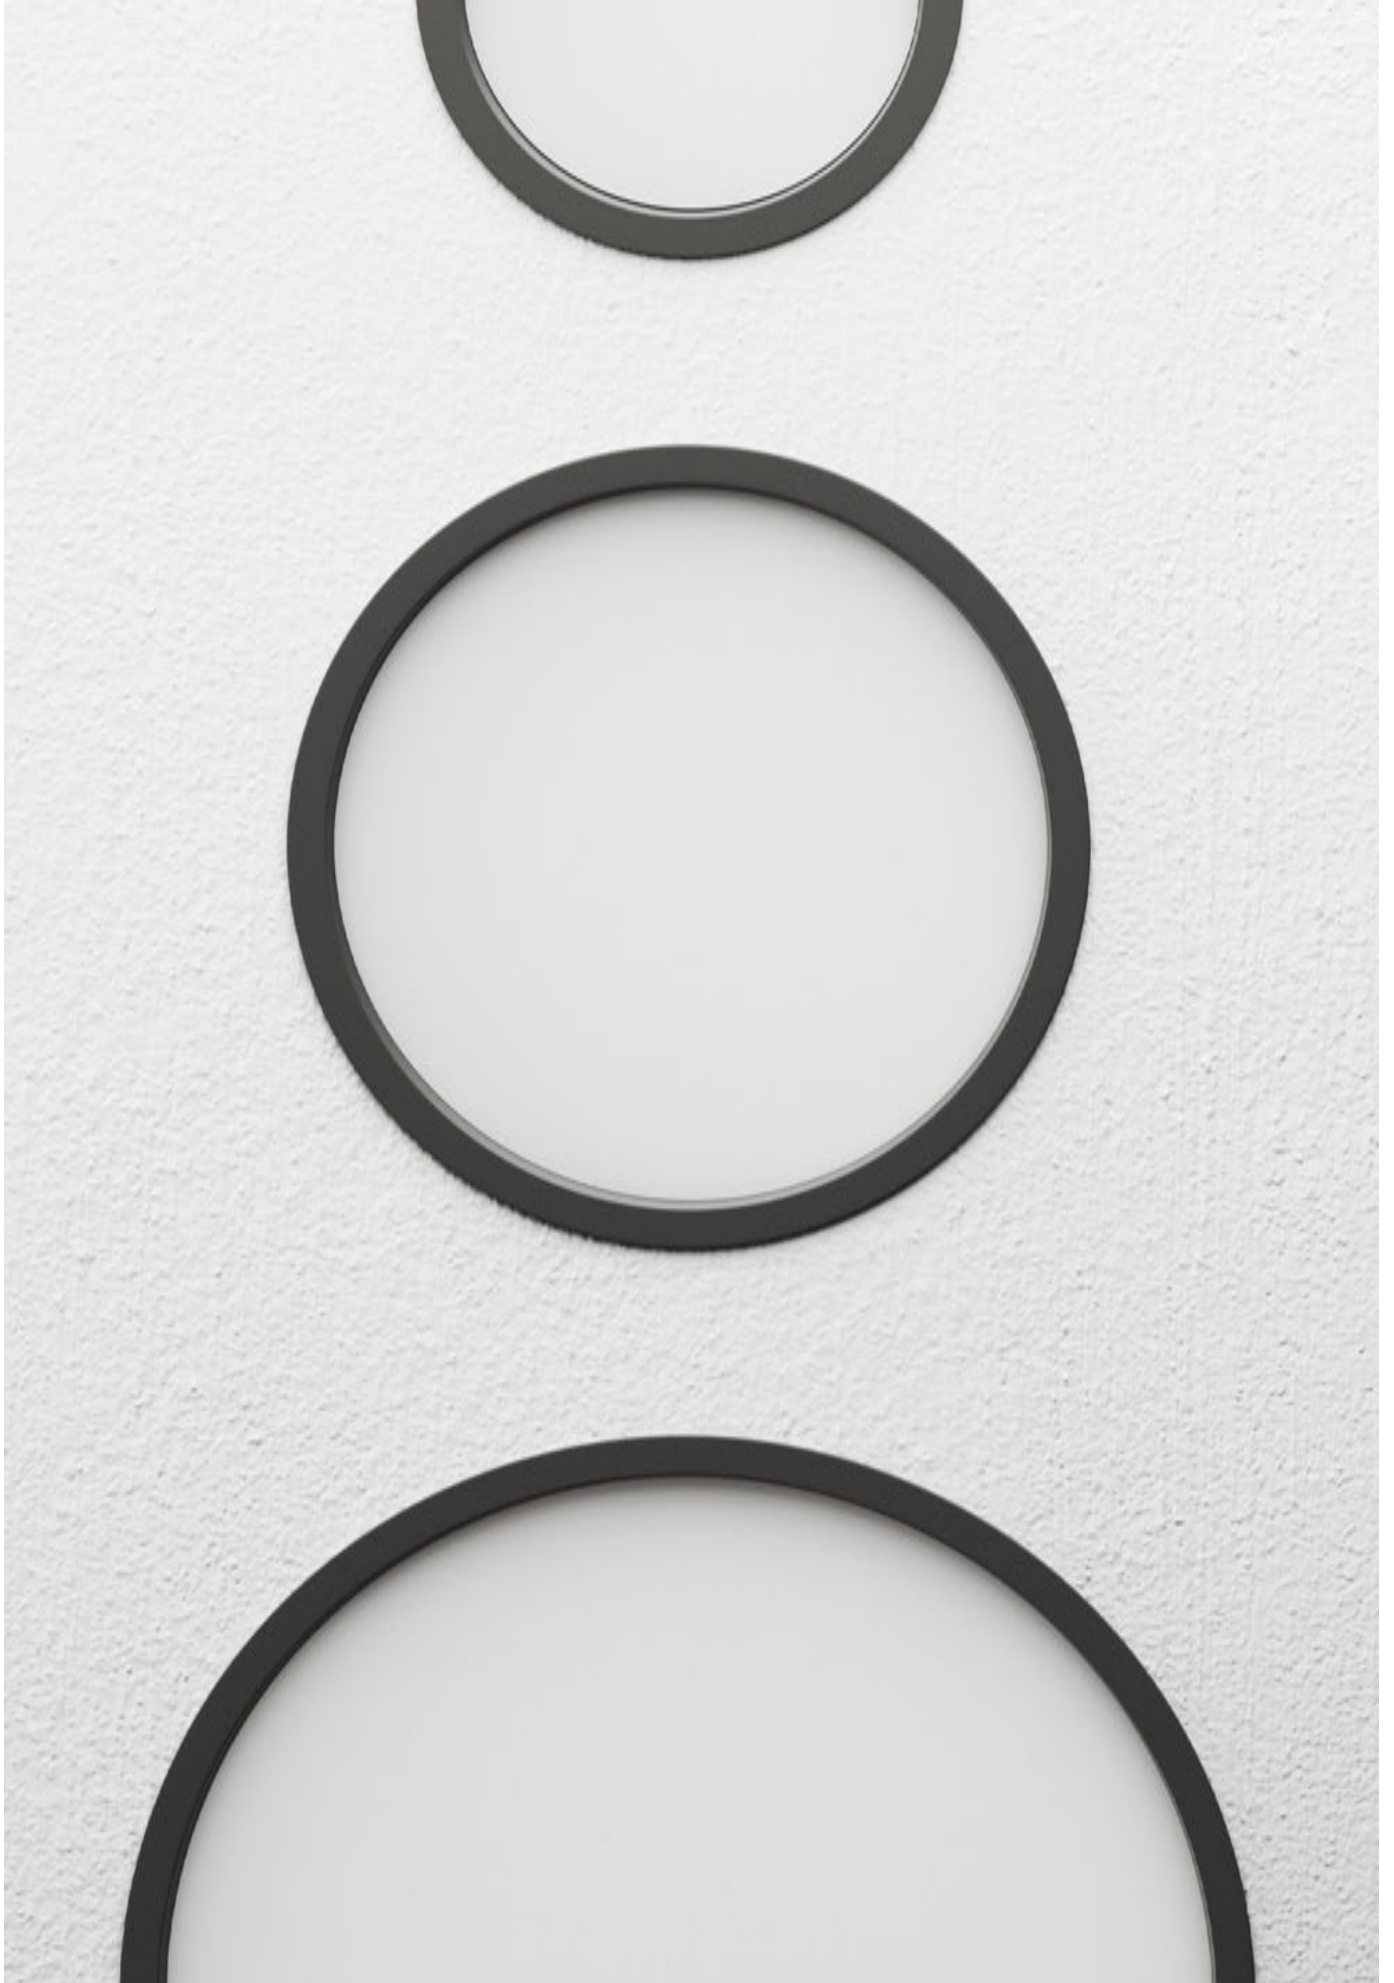


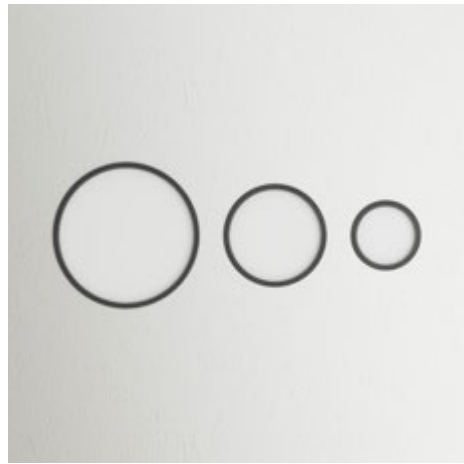

- High quality diffuser
- Integrated SMD backlight
- Aluminum body

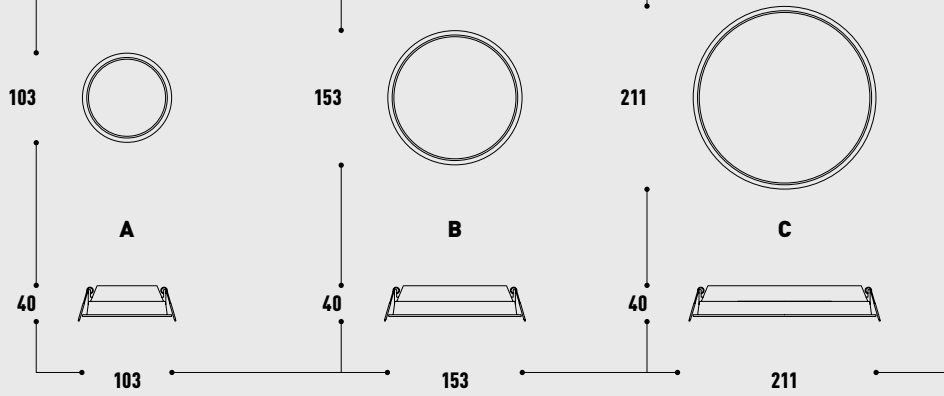

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
SMD	980	3000	10	300	106°	98	A	White	15007
								Black	150077
SMD	1400	3000	16	300	106°	148	B	White	15008
								Black	150088
SMD	2250	3000	24	300	106°	206	C	White	15009
								Black	150099

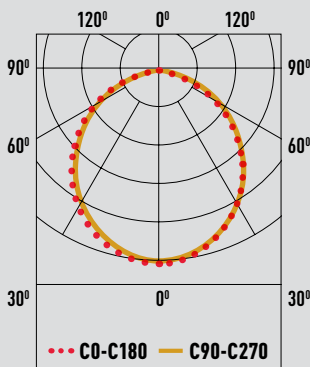

DIAM	LUX	DIST	
2.7 m	302 lx	1 m	A B C
2.7 m	514 lx		
2.7 m	825 lx		
5.3 m	75 lx	2 m	
5.4 m	128 lx		
5.4 m	206 lx		
8.0 m	34 lx	3 m	
8.2 m	57 lx		
8.0 m	92 lx		
10.6 m	19 lx	4 m	
10.9 m	32 lx		
10.7 m	52 lx		



CARTON	Size	PCS	CBM	kg
	(L*W*H) cm			
A	43.5*28*35	60	0.042	13
B	54*38*34	40	0.069	13.2
C	52*33*46	24	0.078	9.8

# COB DOWNLIGHTS

CONE  
MINI

MINI LENS  
RING DOTS





# CONE




## COB Downlight

CONE is a range of circular recessed downlights featuring a trimless design and deep-set LED position that reduces glare. The luminaire is available in fixed and wall-washer versions that can be used throughout a project for many different lighting needs.






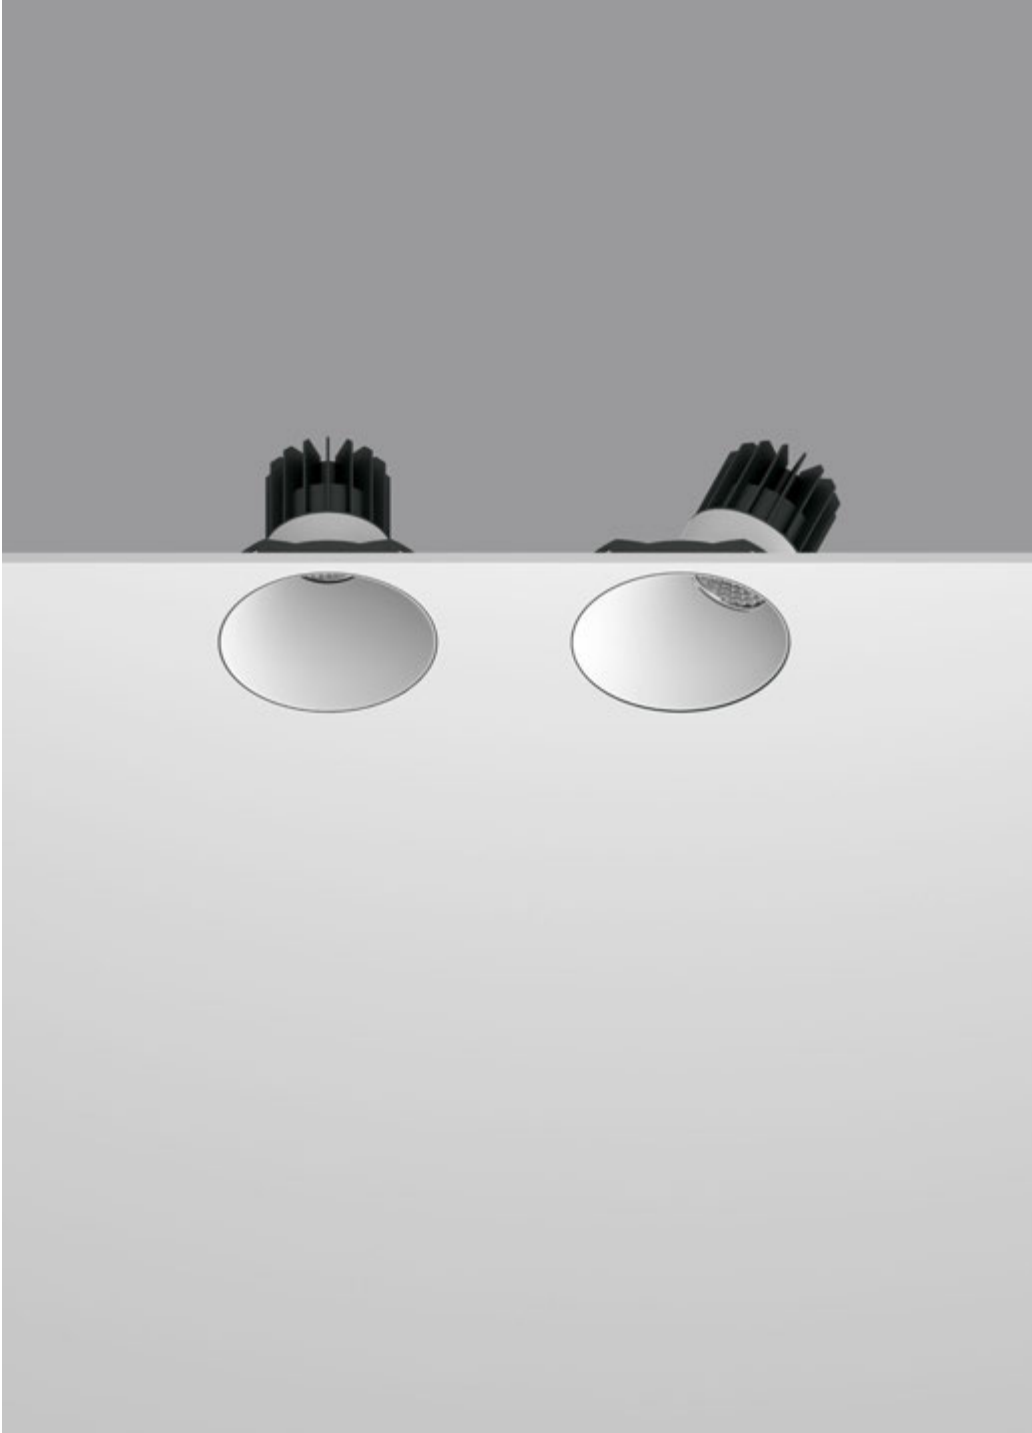


- Integrated COB LED
- CRI 90
- Trimless frame




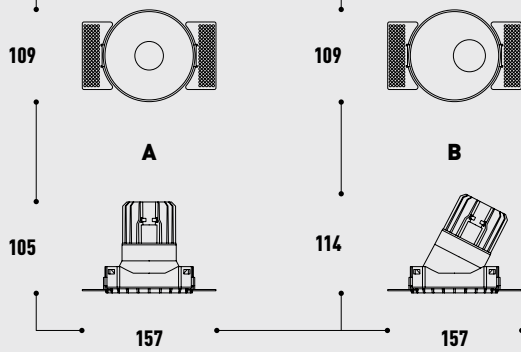

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	1326	3000	13	350	60°	110	A	White	15017
								Black	150177
COB	1326	3000	13	350	60°	110	B	White	15018
								Black	150188

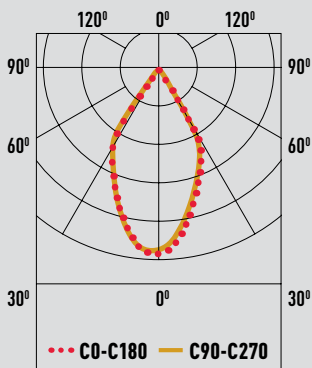

DIAM	LUX	DIST	
1.8 m 1.9 m	1141 lx 2848 lx	1 m	A B
2.2 m 2.2 m	286 lx 286 lx	2 m	
3.2 m 3.3 m	127 lx 127 lx	3 m	
4.3 m 4.4 m	71 lx 72 lx	4 m	



CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	46*40*28	12	0.051	8.7
B	46*40*28	12	0.051	8.7


# MINI



## COB Downlight


An ultra-low glare accent COB downlight with a minimal design. Two different sizes and availability of models with CRI90 make it easy to adapt the luminaire to the needs of any interior.



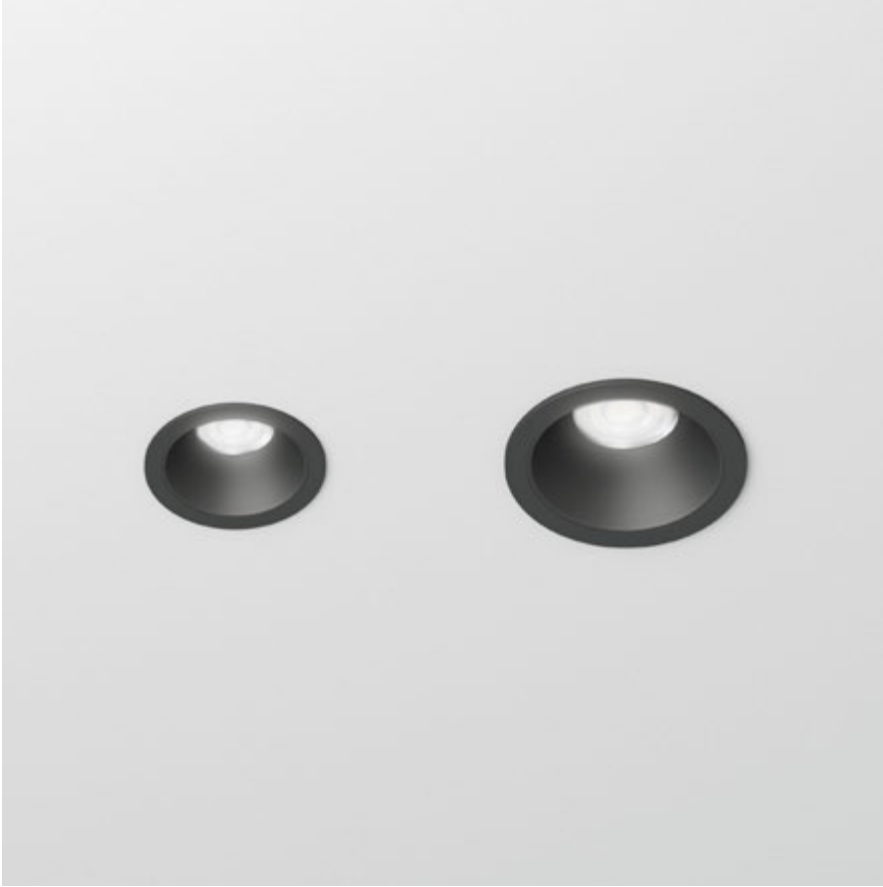


- Integrated COB LED
- Anti glare effect
- CRI 90




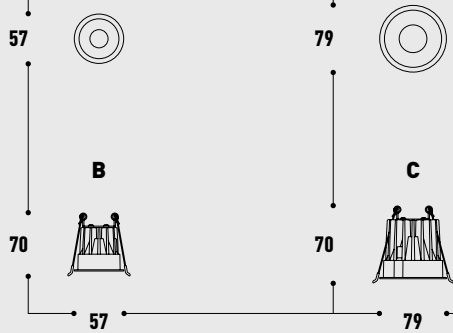

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	704	3000	8	200	33°	52	<b>B</b>	White	15027
								Black	150277
COB	980	3000	12	300	15°	72	<b>C</b>	White	15028
								Black	150288

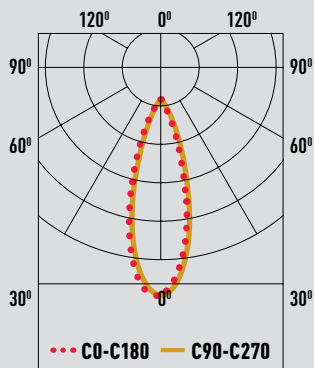


DIAM	LUX	DIST	
0.6 m 0.5 m	2142 lx 2848 lx	1 m	B C
1.2 m 1.0 m	536 lx 712 lx	2 m	
1.8 m 1.5 m	238 lx 316 lx	3 m	
2.4 m 2.0 m	134 lx 178 lx	4 m	



CARTON	Size (L*W*H) cm	PCS	CBM	kg
B	47.5*20*40	50	0.038	7.5
C	60*25*33	40	0.050	10.8

# MINI Lens



CREE Downlight


MINI-LENS is a high-end, modern linear luminaire which elegantly combines points of light. Comes in four different lengths, it is known as a low glare downlight that can be perfectly incorporated into any architecture thanks to its extraordinary compact size.









- Integrated COB LED
- Anti glare effect
- CRI 90

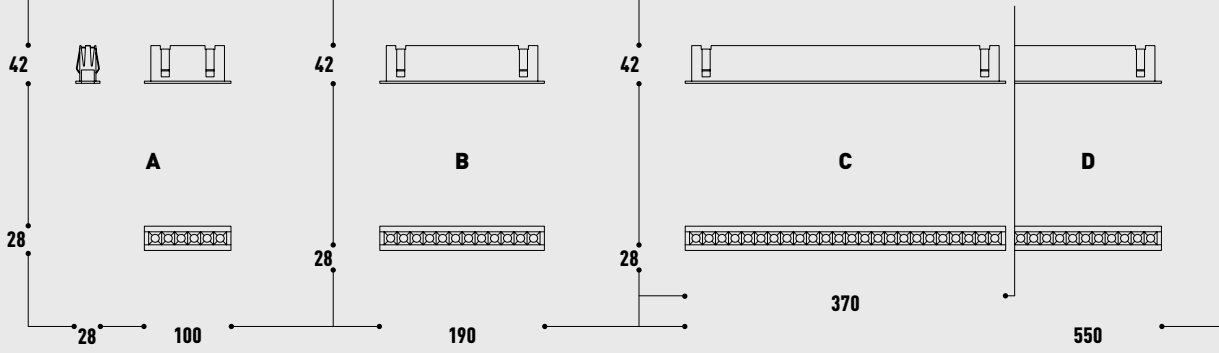

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
CREE	450	3000	6	150	30°	92x22	A	White/black	15069
CREE	990	3000	12	350	30°	182x22	B	White/black	15070
CREE	1812	3000	24	700	30°	362x22	C	White/black	15071
CREE	2853	3000	32	1000	30°	542x22	D	White/black	15072

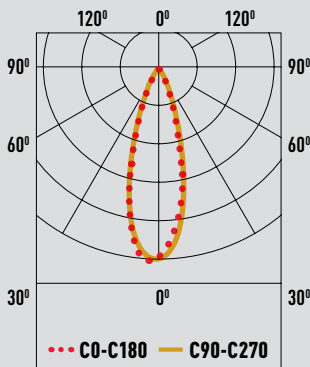


DIAM	LUX	DIST	
0.6 m	1307 lx	1 m	A B C D
0.6 m	2776 lx		
0.6 m	4408 lx		
0.5 m	8315 lx		
1.1 m	327 lx	2 m	
1.1 m	694 lx		
1.2 m	1102 lx		
1.1 m	2079 lx		
1.7 m	145 lx	3 m	
1.7 m	309 lx		
1.7 m	490 lx		
1.6 m	924 lx		
2.2 m	82 lx	4 m	
2.2 m	174 lx		
2.3 m	276 lx		
2.2 m	520 lx		




CARTON	Size	PCS	CBM	kg
	(L*W*H) cm			
A	31*28*20	20	0.017	7.2
B	31*28*20	20	0.017	9.3
C	40*21*20.5	20	0.017	13.8
D	59*22.5*20.5	16	0.027	15


# RING DOTS




COB Downlight

Circular, seamless recessed luminaires, which provides stunning and soft illumination. RING DOTS is designed to minimise the glare for high visual comfort. The installation is simple and the family is available in three diameters: 30, 60 or 90cm.

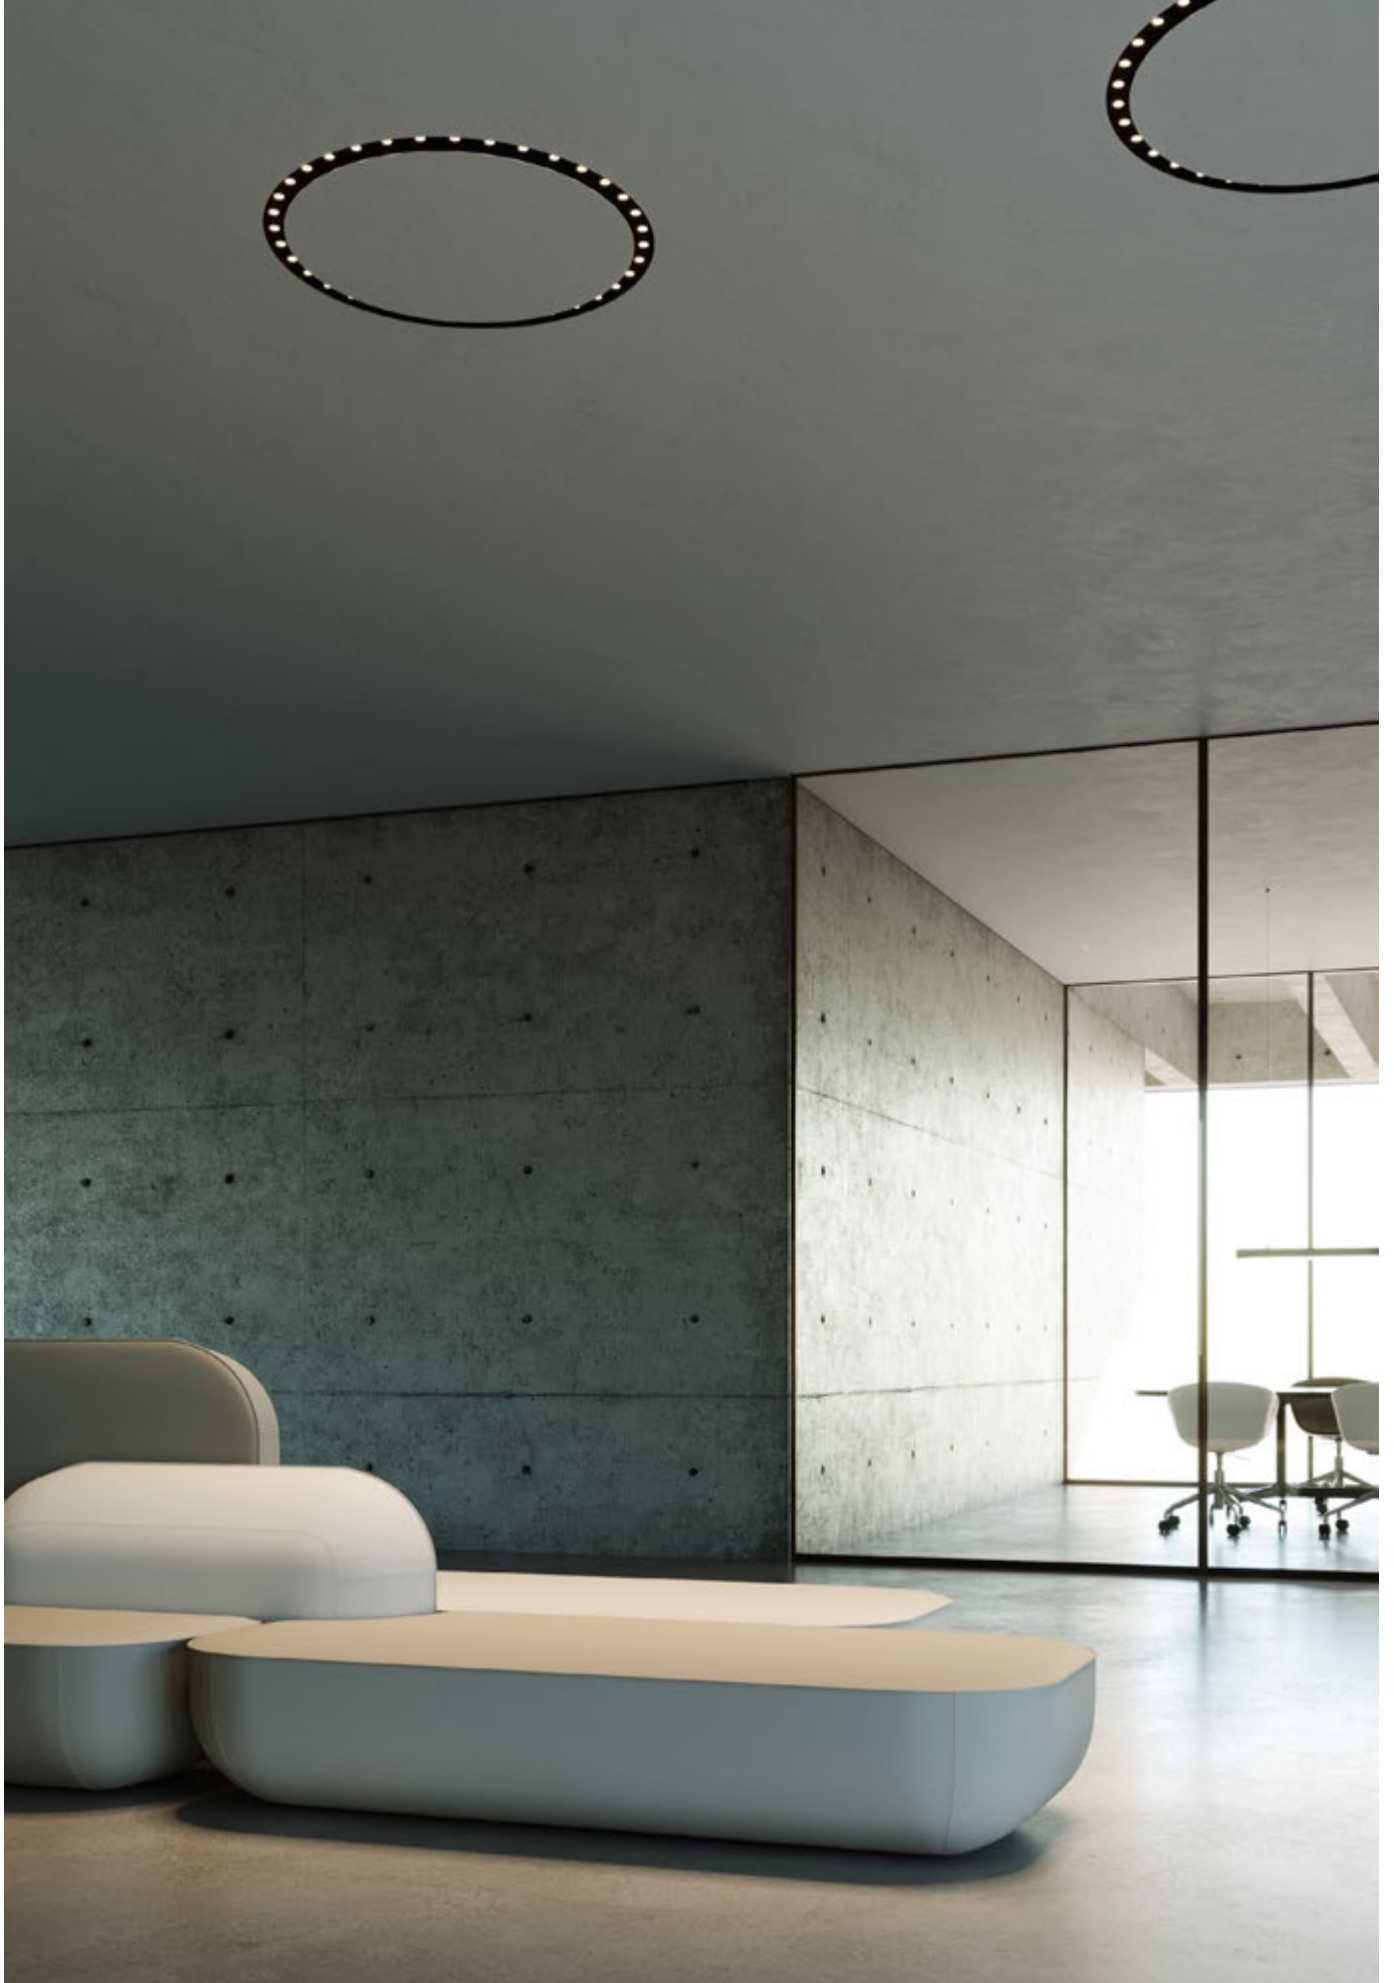

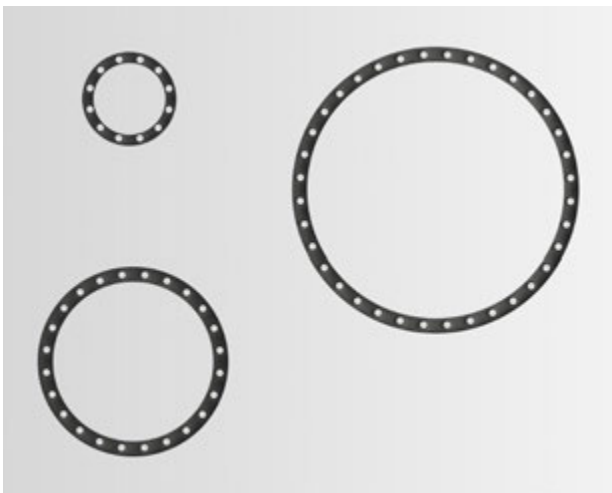


- Integrated COB LED
- Trimless frame
- TRIAC dimmable
- CRI 90

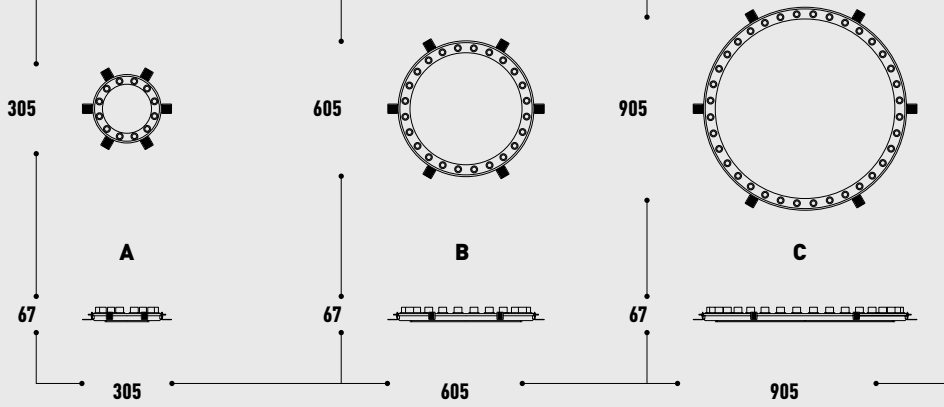


LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Dimming	Colour	Item no.
LED	1152	3000	24	700	24°	310	<b>A</b>	TRIAC*	Black	15369
LED	2400	3000	50	700	24°	610	<b>B</b>		Black	15309
LED	3600	3000	72	700	24°	910	<b>C</b>		Black	15311

\* not included

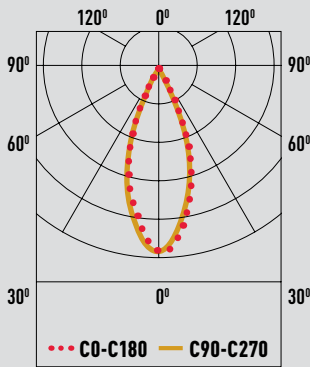

DIAM	LUX	DIST	
0.7 m	2610 lx	1 m	A B C
0.7 m	4830 lx		
0.7 m	7223 lx		
1.4 m	653 lx	2 m	
1.4 m	1207 lx		
1.4 m	1806 lx		
2.1 m	290 lx	3 m	
2.1 m	537 lx		
2.1 m	803 lx		
2.8 m	163 lx	4 m	
2.8 m	302 lx		
2.8 m	451 lx		



CARTON	Size	PCS	CBM	kg
	(L*W*H) cm			
A	38*34.5*33	5	0.043	11.5
B	63*68*7.5	1	0.032	7.5
C	97*98*7.5	1	0.071	13.5

# IP54 DOWNLIGHTS

RON  
TORI

COB TUBE  
SMD TUBE





# RON

!

IP54 COB Downlight


RON is a fine COB led waterproof downlight. This IP54 recessed spot light provides ample direct and ambient illumination by the adjustable integrated led. This collection has a TRIAC dimmable option.






- Integrated COB LED
- IP54 waterproof
- Adjustable spotlight



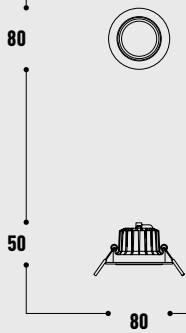


LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Dimming	Colour	Item no.
COB	760	3000	8	170	60°	68	•	TRIAC*	White	15033
									Black	150033

\* not included

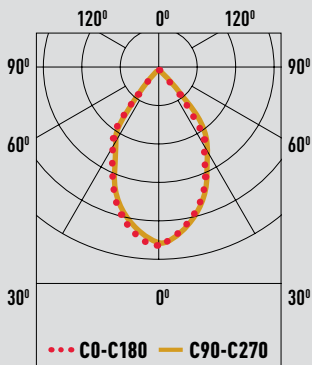

DIAM	LUX	DIST	Type
1.2 m	750 lx	1 m	•
2.4 m	188 lx	2 m	
3.6 m	83 lx	3 m	
4.8 m	47 lx	4 m	



CARTON	Size (L*W*H) cm	PCS	CBM	kg
•	46*46*29.5	48	0.062	15



# TORI



## IP54 SMD Downlight


TORI is a refined integrated led waterproof downlight, which creates uniform light distribution in wet spaces. Three sizes and availability of models with CRI90 make it easy to adapt the luminaire to the needs of the interior.



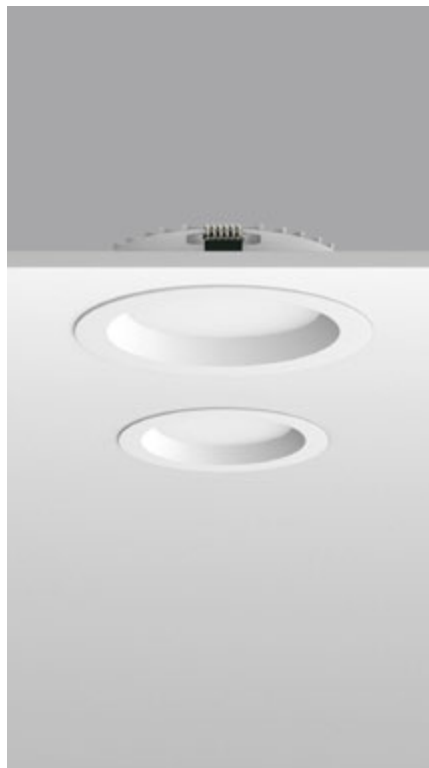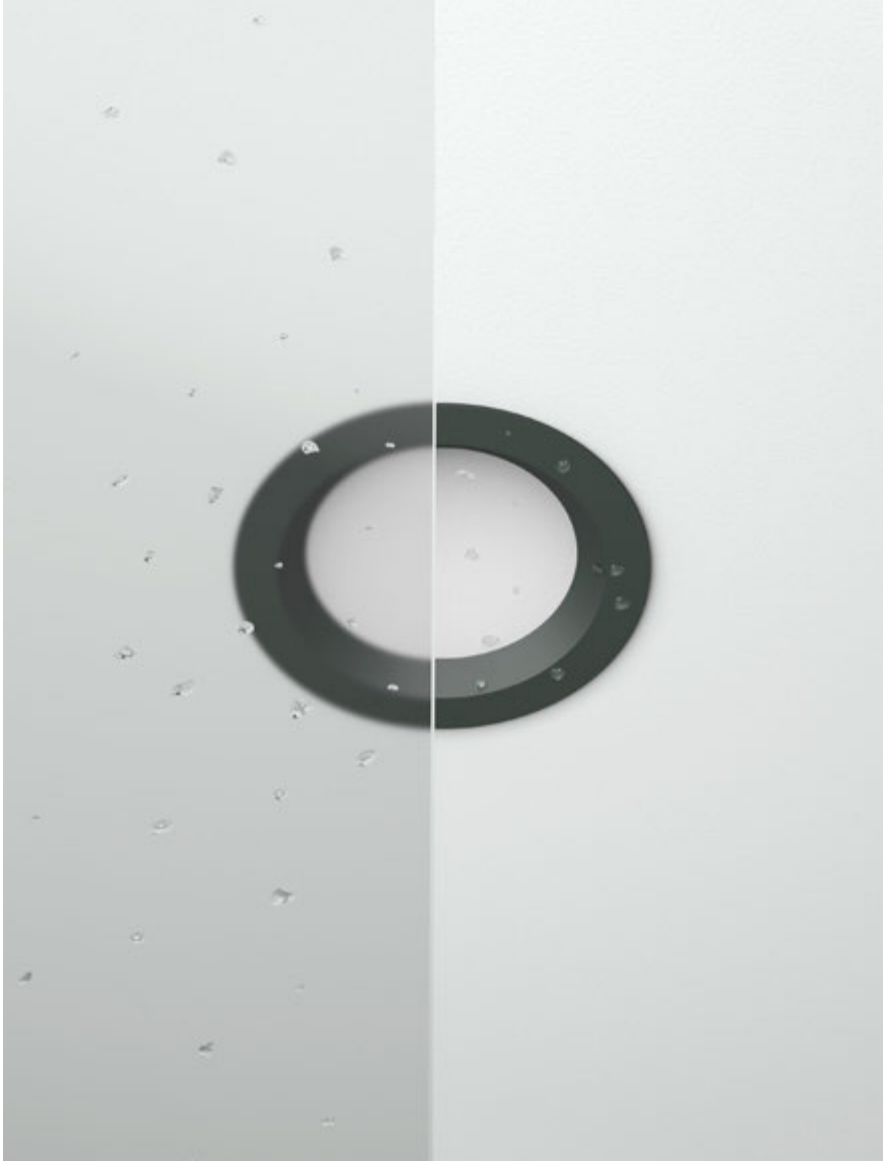


- High quality diffuser
- Integrated SMD backlight
- IP54 waterproof



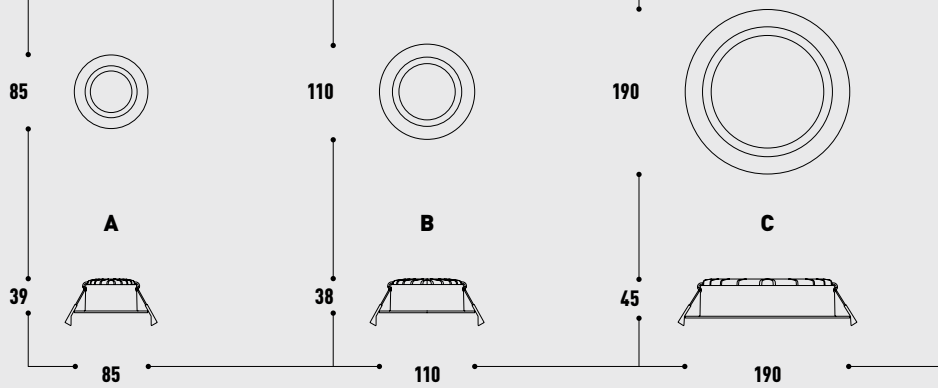

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
SMD	650	3000	7	220	90°	70	A	White	15035
								Black	150355
SMD	1100	3000	13	230	90°	90	B	White	15036
								Black	150366
SMD	2600	3000	25	580	90°	160	C	White	15219
								Black	15220

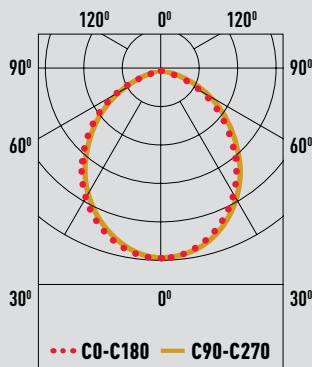

DIAM	LUX	DIST
1.9 m	247 lx	1 m
2.2 m	546 lx	
2.6 m	994 lx	
3.9 m	62 lx	2 m
4.5 m	136 lx	
5.2 m	249 lx	
5.8 m	27 lx	3 m
6.7 m	61 lx	
7.7 m	111 lx	
7.7 m	15 lx	4 m
8.9 m	34 lx	
10.3 m	62 lx	



CARTON	Size	PCS	CBM	kg
	(L*W*H) cm			
A	57.5*57.5*20	50	0.066	13.9
B	58.5*37*29.5	36	0.064	12.3
C	46*44*40	20	0.081	15.4

# COB TUBE

IP54 Surface Downlight




COB TUBE is a dimmable surface downlight which offers many different combinations. Providing two anti glare options; CONE or RING shape, it can also be used for wet spaces. Variety of finishes for inserts and housings allows to get interesting compositions that fit into any interior.













- Integrated COB LED
- Wide range of accessories
- IP54 waterproof
- TRIAC dimmable
- CRI 90




85


**OPTIONS**

 <b>Total White</b> 15301		 <b>Total Black</b> 15302	
 <b>White*</b> 15303	 <b>Black*</b> 15304	 <b>Gold*</b> 15305	
 <b>White*</b> 15306	 <b>Black*</b> 15307	 <b>Gold*</b> 15308	

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type
COB	655	3000	8	200	24°	-	•

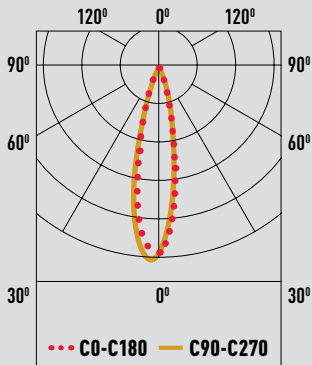

DIAM	LUX	DIST	Type
0.4 m	3186 lx	1 m	•
0.8 m	796 lx	2 m	
1.2 m	354 lx	3 m	
1.6 m	199 lx	4 m	



CARTON	Size (L*W*H) cm	PCS	CBM	kg
•	50x40x21	40	0.04	15.8


\* not included

# SMD TUBE




## IP54 Surface Downlight

SMD TUBE is a surface light, with a minimalist painted aluminium cylinder that comes in 3 different finishes. This IP54 surface mounted family is built with SMD backlight. All 3 Sizes come with high quality diffusers that spread soft and bright light to the space. It can also be used for wet spaces.

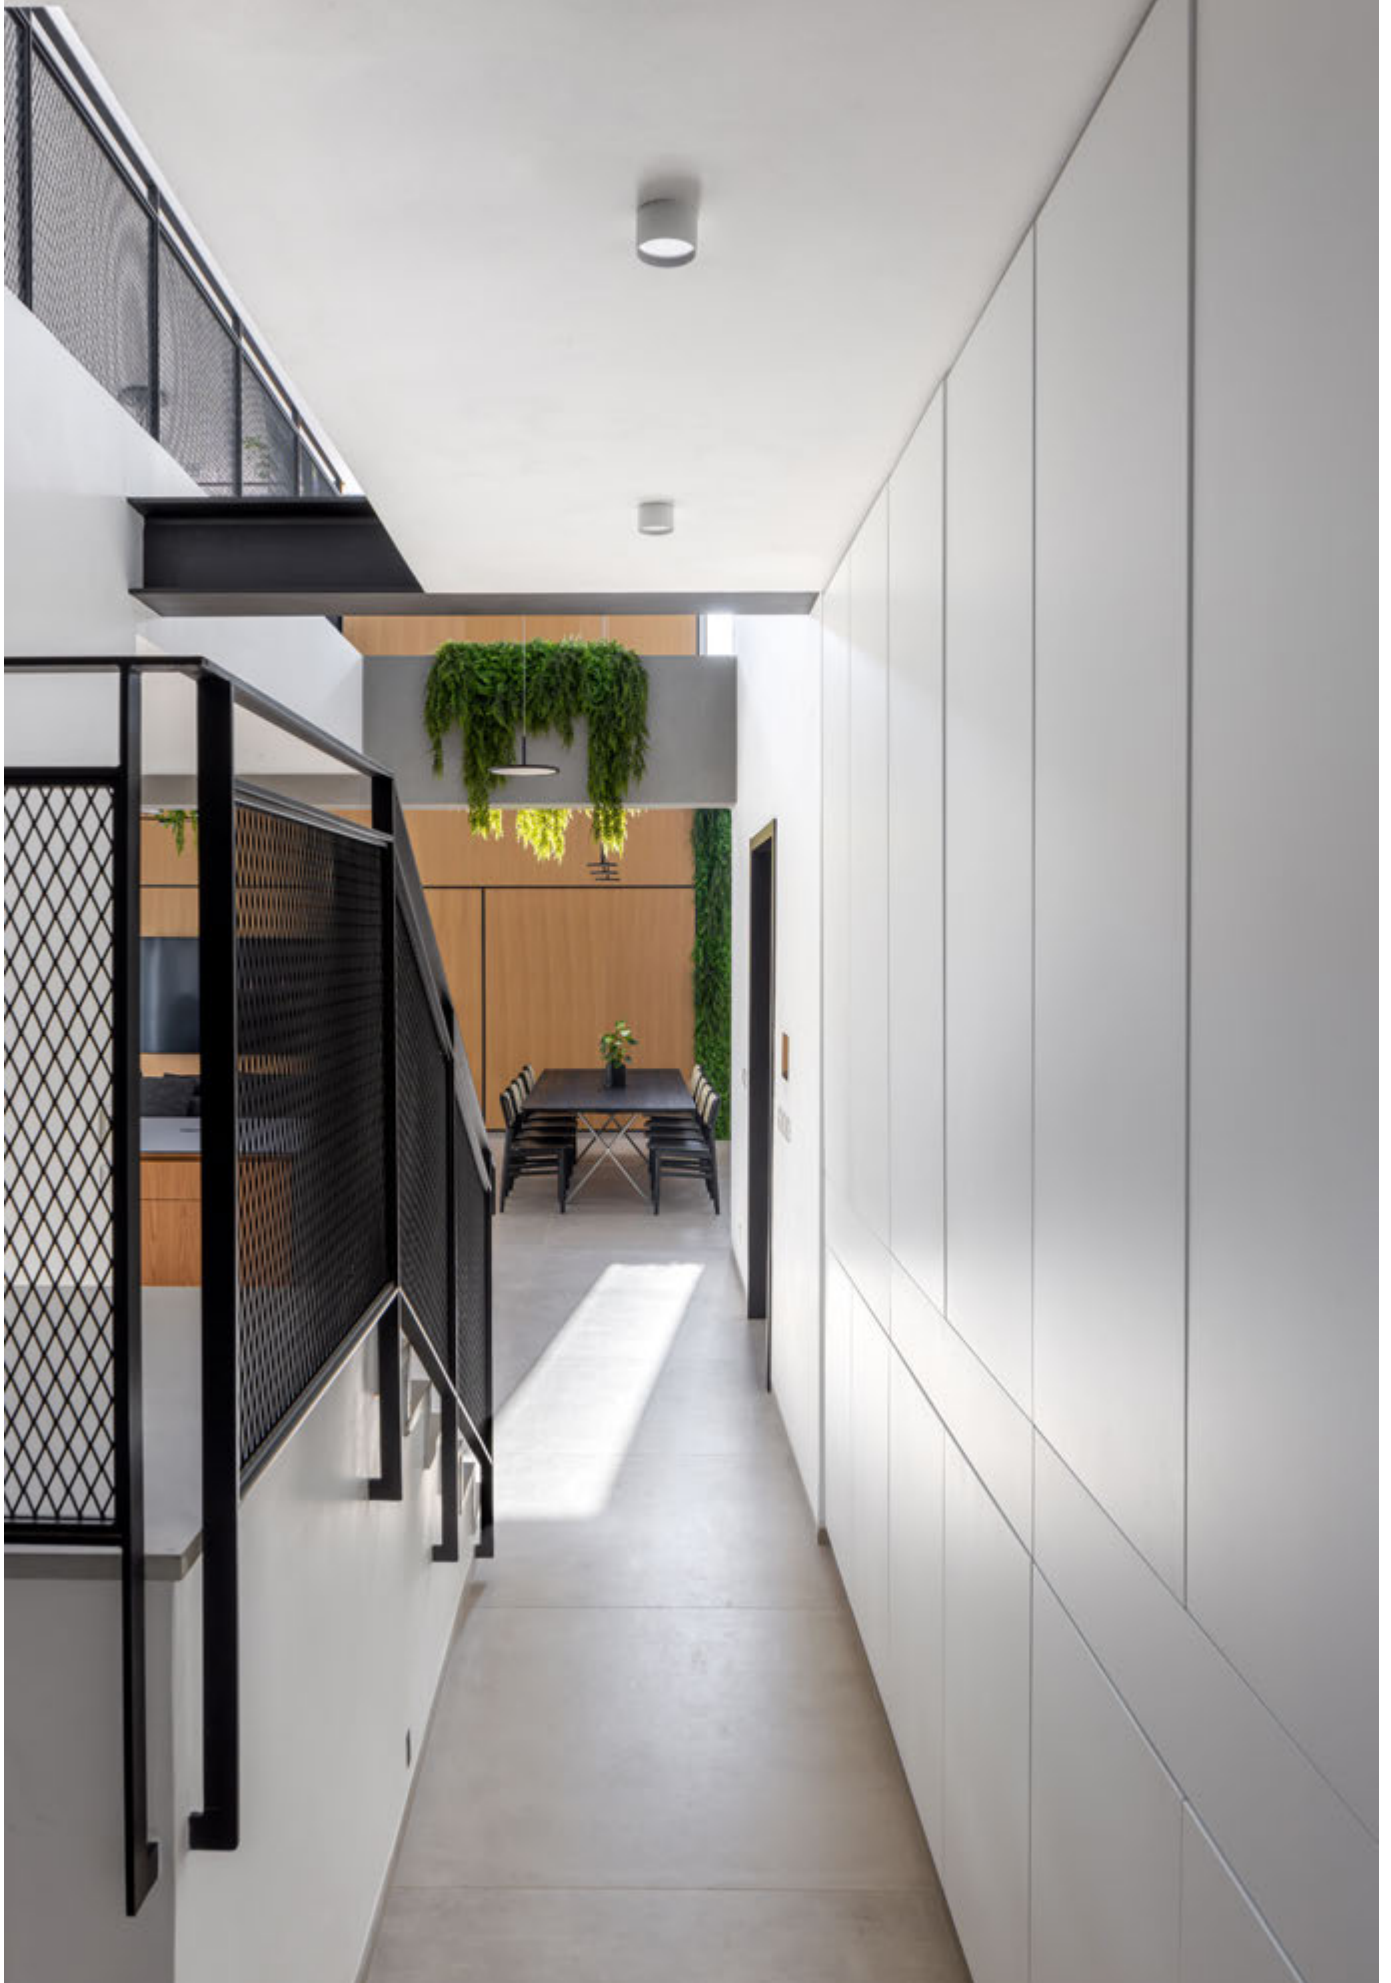





- High quality diffuser
- Integrated SMD backlight
- IP54 waterproof
- Aluminum body

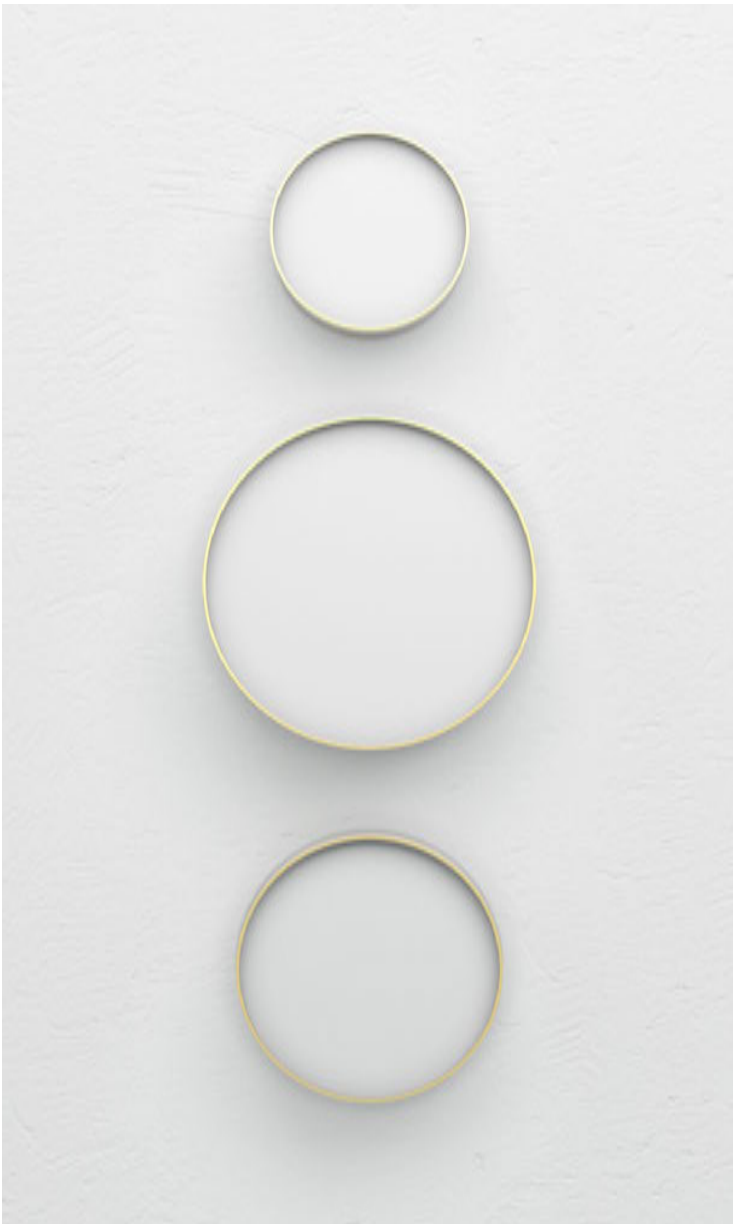




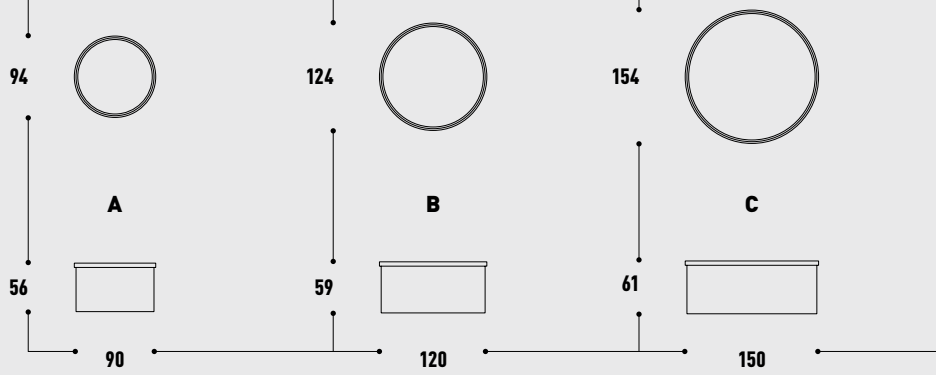

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
SMD	900	3000	10	250	90°	-	A	White	15080
								Black	15081
								Gold	15082
SMD	1200	3000	15	400	90°	-	B	White	15083
								Black	15084
								Gold	15085
SMD	1700	3000	20	550	90°	-	C	White	15086
								Black	15087
								Gold	15088

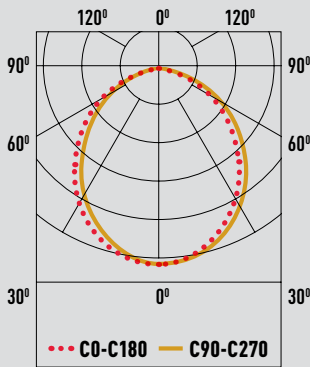

DIAM	LUX	DIST	
3.8 m	121 lx	1.5 m	A
3.9 m	197 lx		B
4.0 m	230 lx		C
5.6 m	54 lx	2.3 m	
5.8 m	88 lx		
6.1 m	102 lx		
8.8 m	22 lx	3.5 m	
9.1 m	36 lx		
9.4 m	42 lx		
10.0 m	17 lx	4 m	
10.4 m	28 lx		
10.8 m	32 lx		



CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	53.5*22*38	50	0.04	18.5
B	68*28*32.5	40	0.06	19.6
C	34*34*40	20	0.04	15.4

# SPOT LIGHTS

TOMI  
TORRES

TUBE



# TOMI




## SPOT Light


TOMI is a discreet adjustable spotlight available in both recessed and surface – mounted versions. The body is built from a painted aluminium cylinder Ø7,5cm or Ø9,5cm. Offering a wide range of options, optics and accessories, the product provides ample direct and ambient illumination with excellent colour rendering index.






- Integrated COB LED
- Wide range of accessories
- Adjustable spotlight
- TRIAC dimmable
- CRI 90

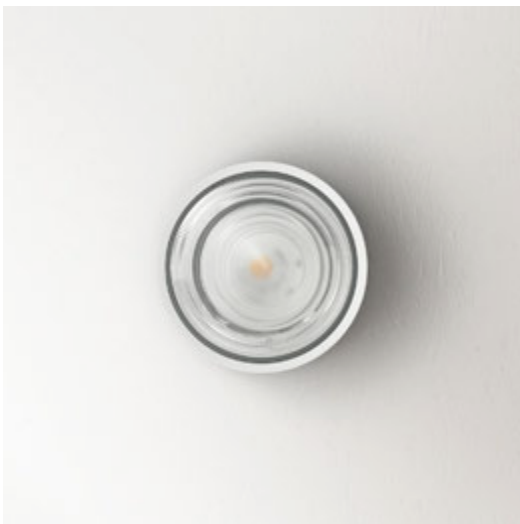

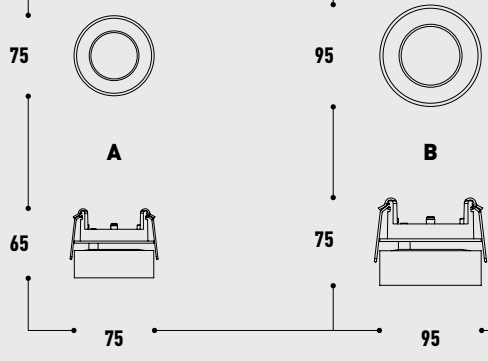



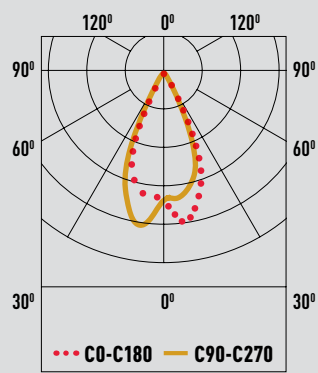









LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Dimming
COB	590	3000	9	700	45°	75	A	TRIAC*
COB	1280	3000	13	350	38°	88	B	TRIAC*




DIAM	LUX	DIST	
0.9 m	2226 lx		A
0.9 m	842 lx	1 m	B
1.5 m	557 lx		
1.8 m	210 lx	2 m	
2.3 m	247 lx		
2.7 m	94 lx	3 m	
3.0 m	139 lx		
3.6 m	53 lx	4 m	

**OPTIONS**

<b>A</b>		 Total White 15066	 Total Black 15067
 Gold* 15348	 Rose Gold* 15350	 Chrome* 15352	 White* 15354
<b>B</b>		 Total White 15063	 Total Black 15064
 Gold* 15347	 Rose Gold* 15349	 Chrome* 15351	 White* 15353

\* not included




CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	59.5*23*17.5	20	0.024	6.9
B	55*31*23	20	0.039	10




- Integrated COB LED
- Wide range of accessories
- Adjustable spotlight
- TRIAC dimmable
- CRI 90



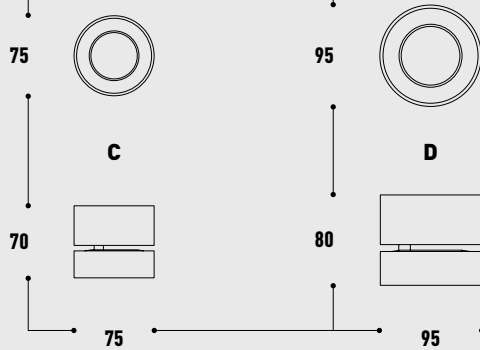

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Dimming
COB	590	3000	9	700	45°	-	C	TRIAC*
COB	1280	3000	13	350	38°	-	D	TRIAC*

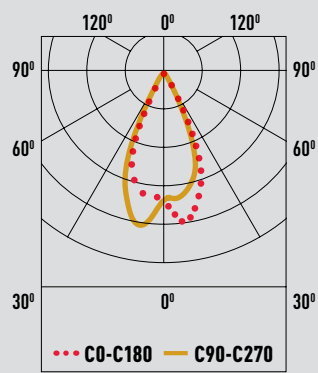

DIAM	LUX	DIST	
0.9 m	2226 lx		C D
0.9 m	842 lx	1 m	
1.5 m	557 lx		2 m
1.8 m	210 lx		
2.3 m	247 lx		3 m
2.7 m	94 lx		
3.0 m	139 lx		4 m
3.6 m	53 lx		

**OPTIONS**

**C**

Total White 15341

Total Black 15342

Gold\* 15348

Rose Gold\* 15350

Chrome\* 15352

White\* 15354

**D**

Total White 15343

Total Black 15344


Gold\* 15347

Rose Gold\* 15349

Chrome\* 15351

White\* 15353

\* not included

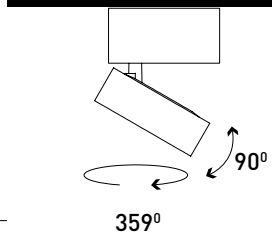


CARTON	Size (L*W*H) cm	PCS	CBM	kg
C	42*18*17.5	20	0.016	7.1
D	54.5*23*20.5	20	0.029	9.4

# TORRES




## SPOT Light

Recessed or surface spotlight with rotatable and swivable head - elegance and flexibility combined. Its body is built from a painted minimal aluminium cylinder. This spot light provides ample direct and ambient illumination. It is suitable for professional use that requires very good color rendering.

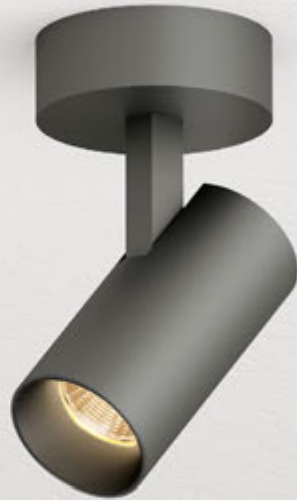





- Integrated COB LED
- Adjustable spotlight
- TRIAC dimmable
- CRI 90

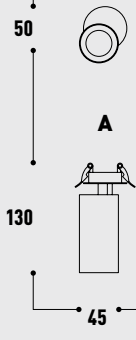

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	610	3000	7	180	24°	45	A	White	15037
								Black	15038
								Gold	15039

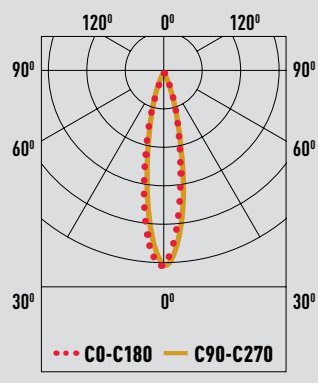

DIAM	LUX	DIST	
0.4 m	3427 lx	1 m	A
0.8 m	857 lx	2 m	
1.2 m	381 lx	3 m	
1.5 m	214 lx	4 m	

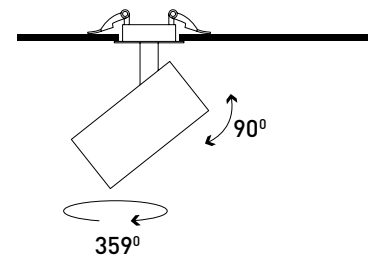


CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	37*22.5*30	30	0.025	8.6




- Integrated COB LED
- Adjustable spotlight
- TRIAC dimmable
- CRI 90




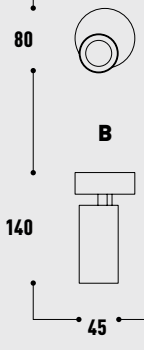

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	610	3000	7	180	24°	-	B	White	15040
								Black	15041

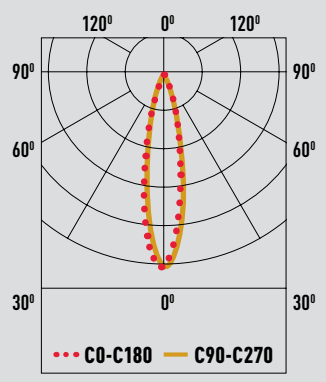


DIAM	LUX	DIST	Type
0.4 m	3427 lx	1 m	B
0.8 m	857 lx	2 m	
1.2 m	381 lx	3 m	
1.5 m	214 lx	4 m	

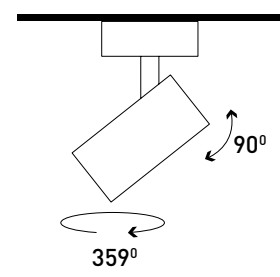

CARTON	Size (L*W*H) cm	PCS	CBM	kg
B	35*35*35	50	0.043	14.2

# TUBE




## SPOT Light


Tube is a minimal, ceiling-recessed spot light characterised by its trimless design. This spot light provides ample direct and ambient illumination by the adjustable head. Available in two different sizes all models have a high color rendering index – CRI90.






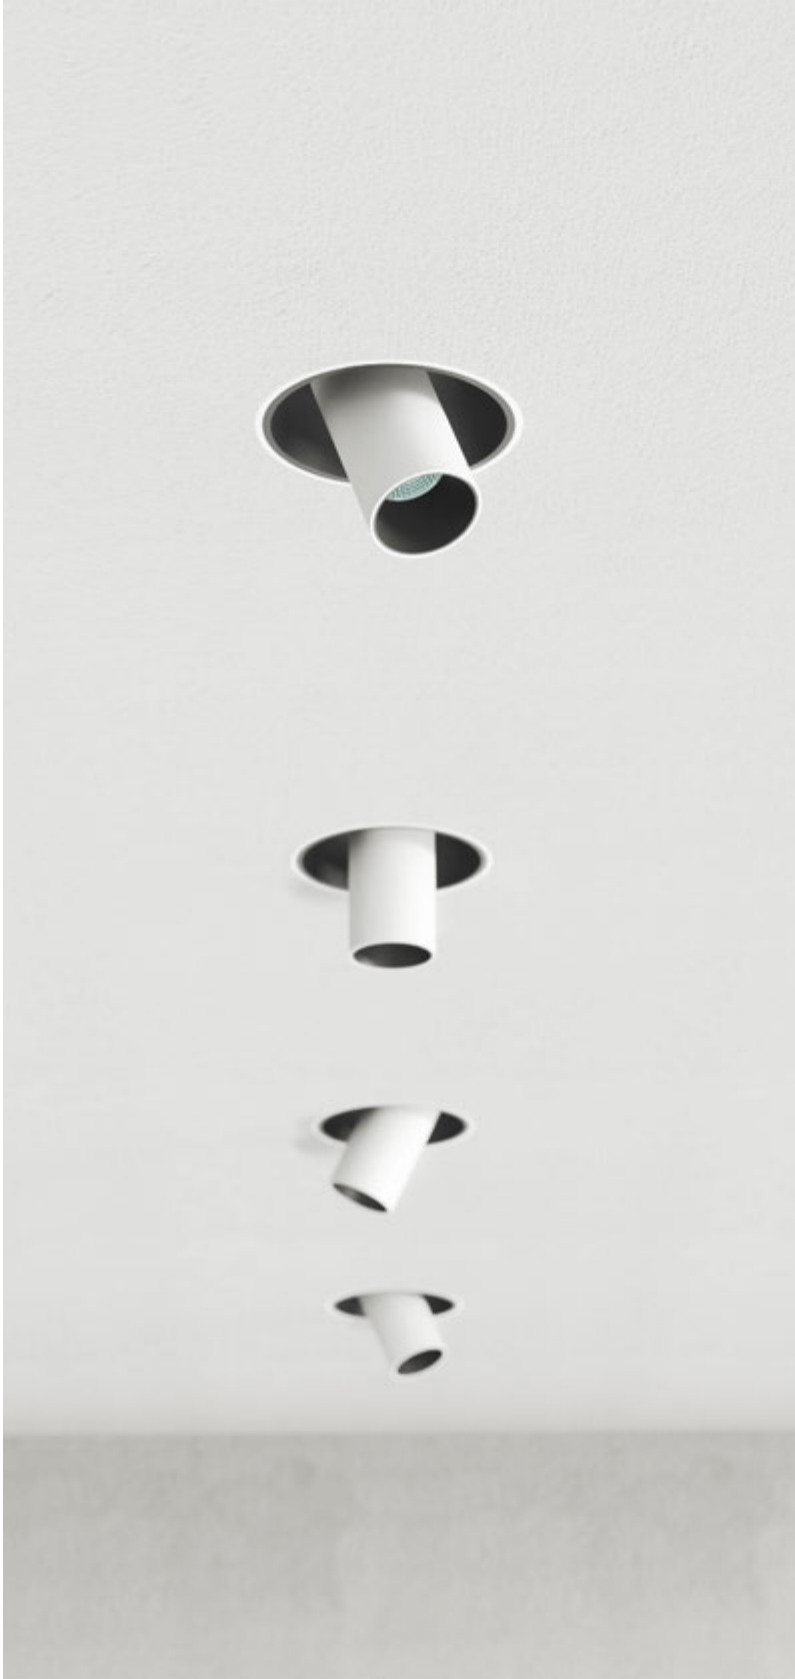


- Integrated COB LED
- Adjustable spotlight
- Trimless frame
- CRI 90

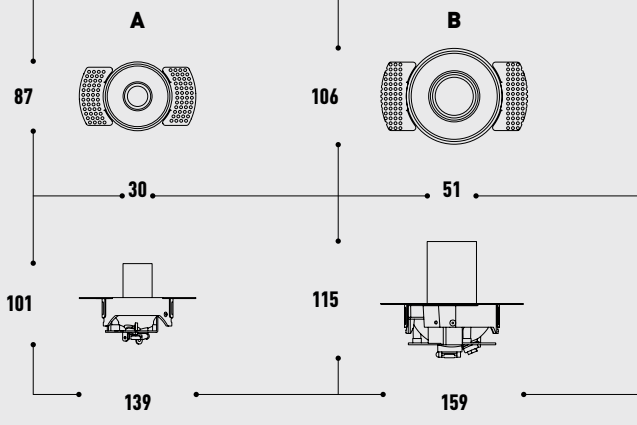

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	676	3000	7	700	30°	90	A	White/black	15372
COB	1095	3000	13	350	30°	110	B	White/black	15373

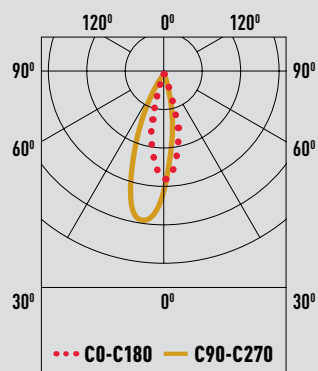

DIAM	LUX	DIST	
0.5 m	648 lx		A B
0.4 m	1110 lx	1 m	
1.0 m	162 lx		2 m
0.7 m	278 lx		
1.5 m	72 lx		3 m
1.1 m	123 lx		
2.0 m	41 lx		4 m
1.5 m	69 lx		

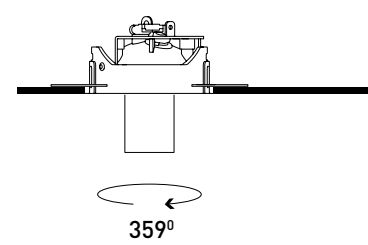

CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	49.5*28*24.5	20	0.034	4.8
B	62*33*27.5	20	0.056	11.1

# STEP LIGHTS

MINI LINE

MINI DROP


MINI SQUARE




# MINI STEP

STEP Light


MINI STEP family is a minimal collection, built with a painted aluminum body integrated with 4W COB led light. MINI STEP is a fine wall recessed night light.

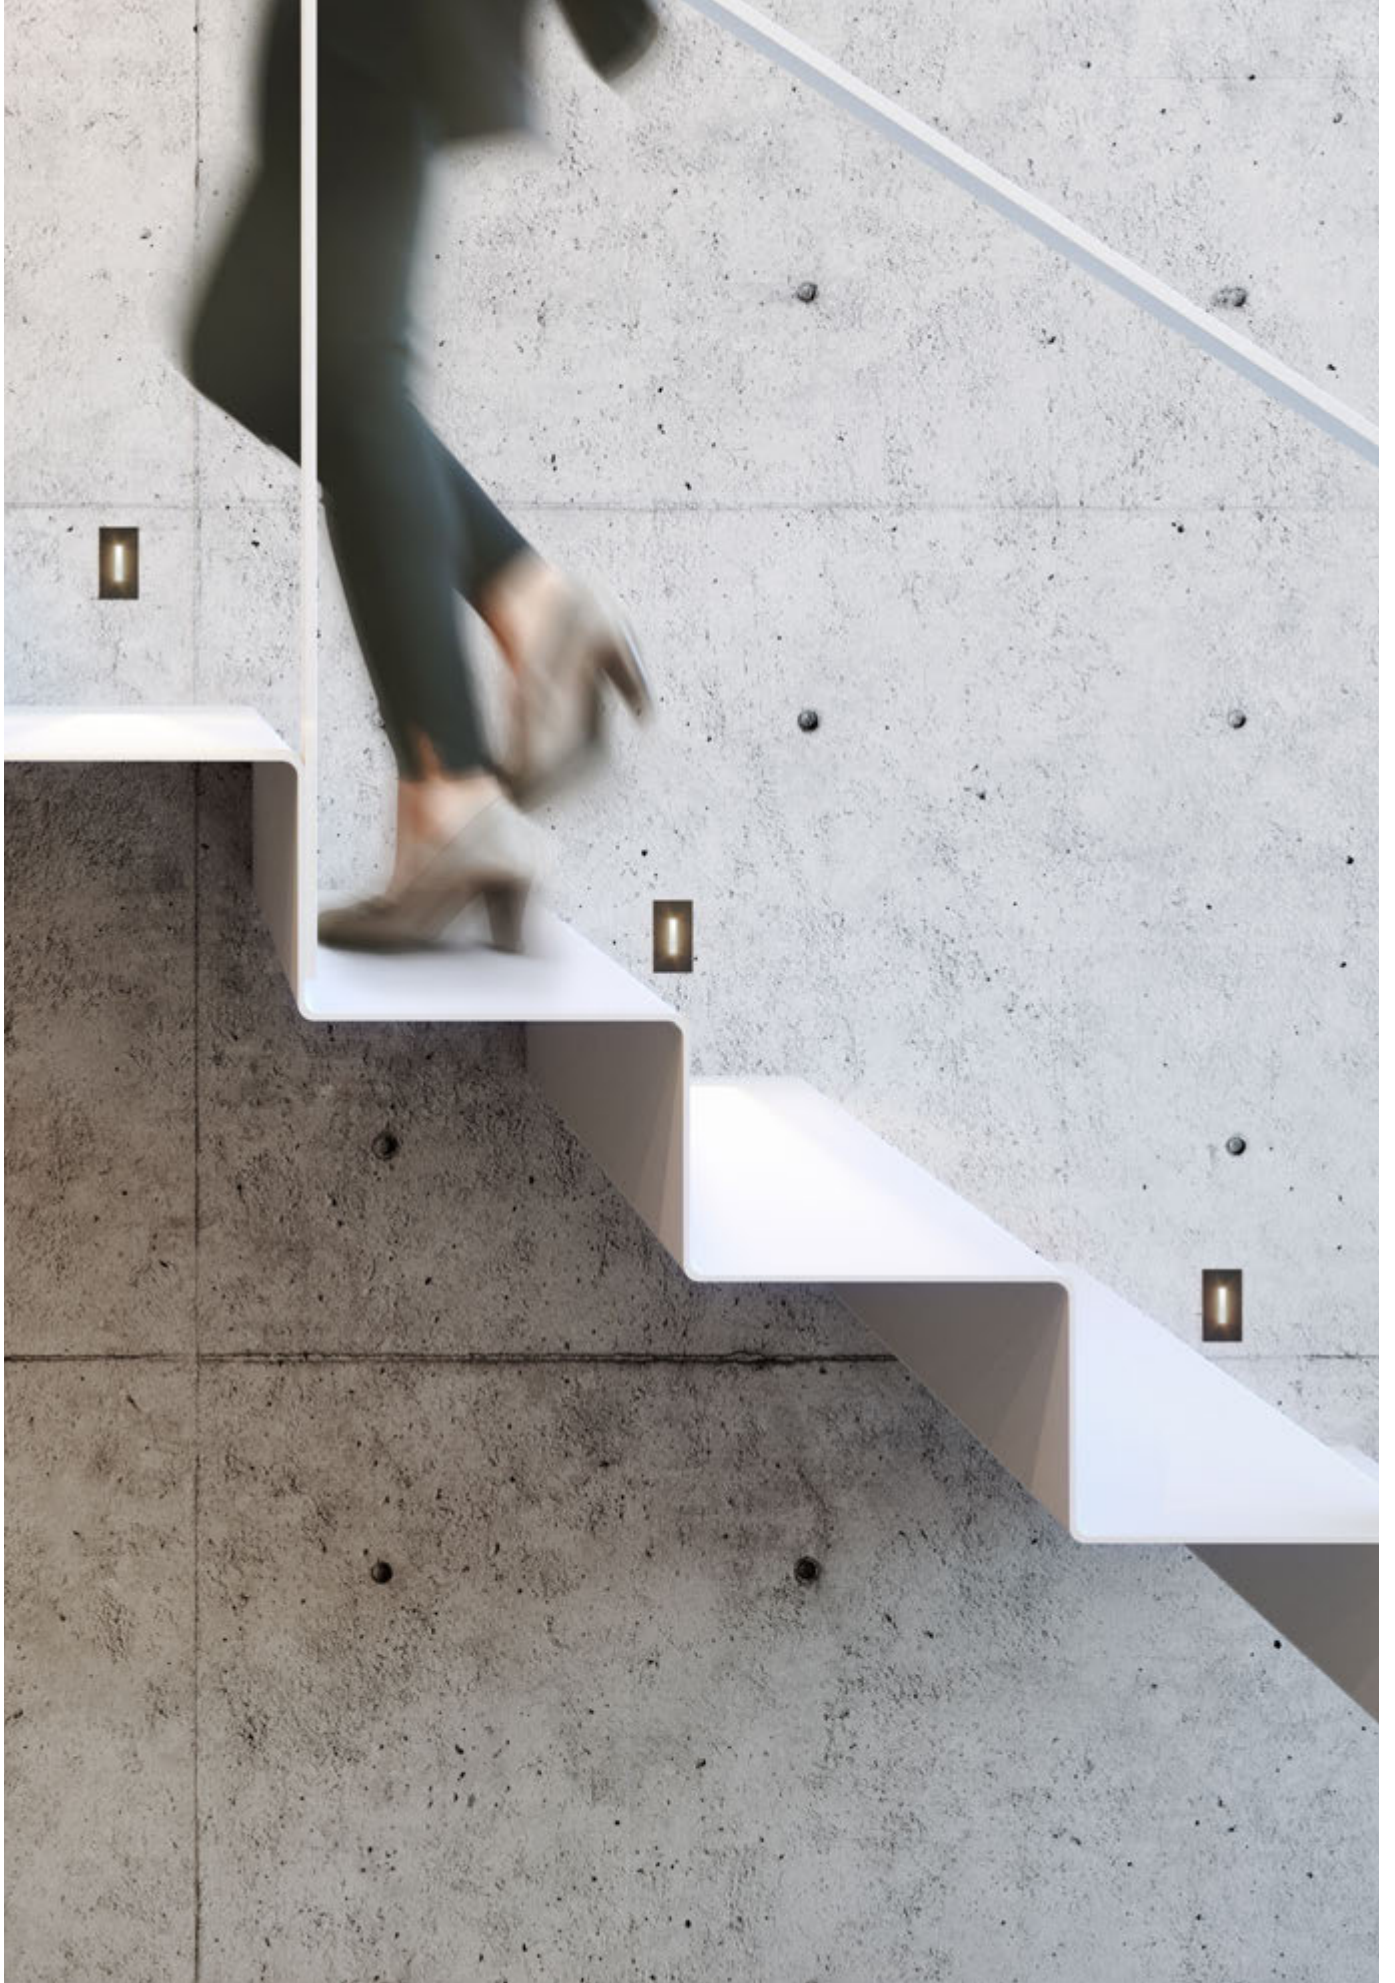



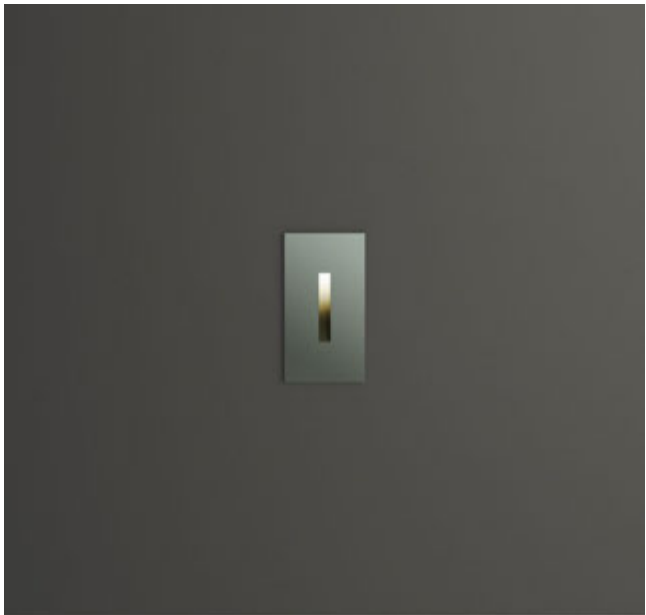


- Concrete box included
- Easy installation
- Various light effects





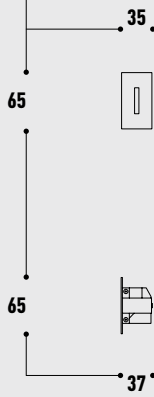


LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	380	3000	4	700	100°	20x55	A	White	15060
								Black	150600

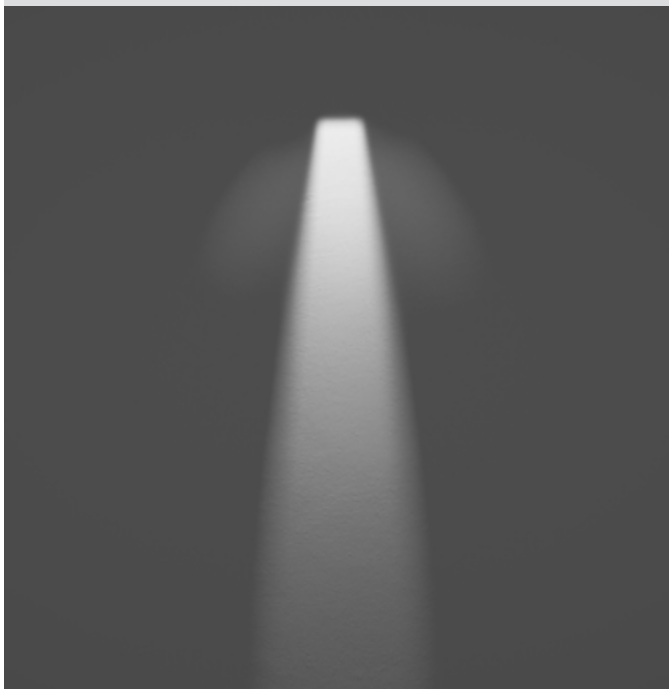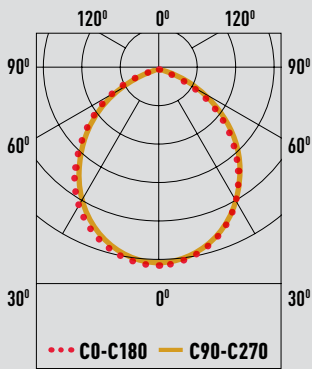




CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	55*23*36.5	50	0.046	11.5

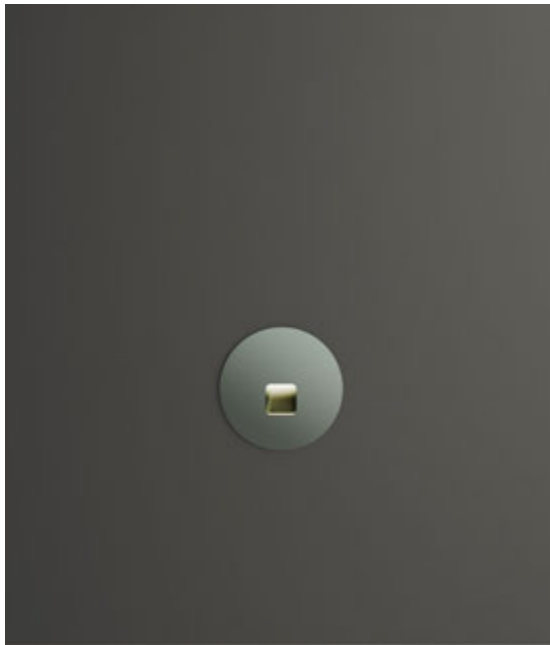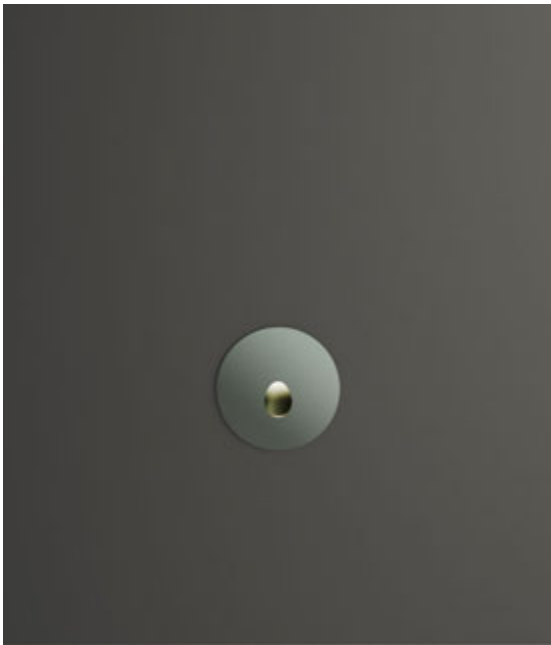

- Concrete box included
- Easy installation
- Various light effects

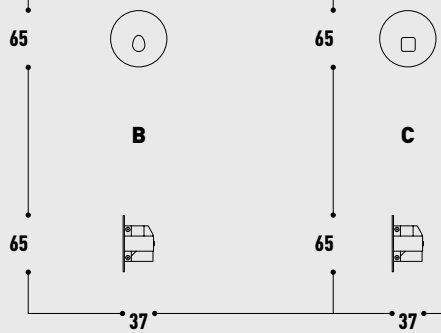

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	380	3000	4	700	100°	20x55	<b>B</b>	White	15061
								Black	150611
COB	380	3000	4	700	100°	20x55	<b>C</b>	White	15062
								Black	150622

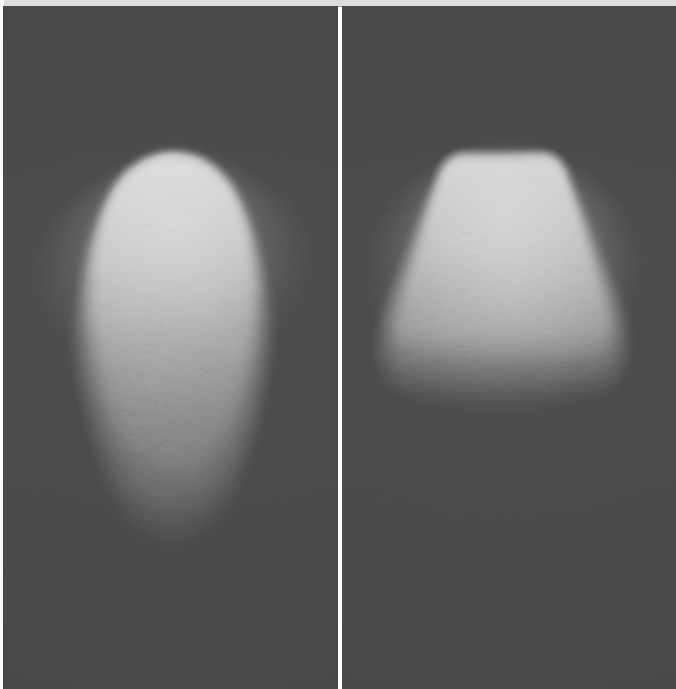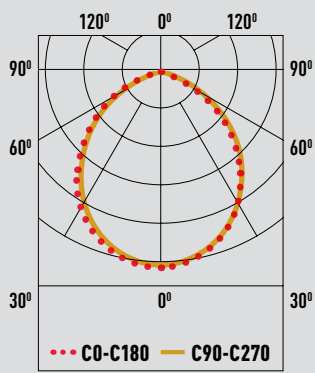

CARTON	Size (L*W*H) cm	PCS	CBM	kg
B	55*23*36.5	50	0.046	11.5
C	55*23*36.5	50	0.046	11.5


# READING LIGHTS

NICK LED

NOVA LED




# NICK LED



## COB Reading Light

NICK LED is a contemporary interpretation of a classic gooseneck task light. It features a flexible mat black silicone arm which offers a comfortable experience. Its base is equipped with a minimalist switch. A versatile light for every day use in both domestic and commercial settings.

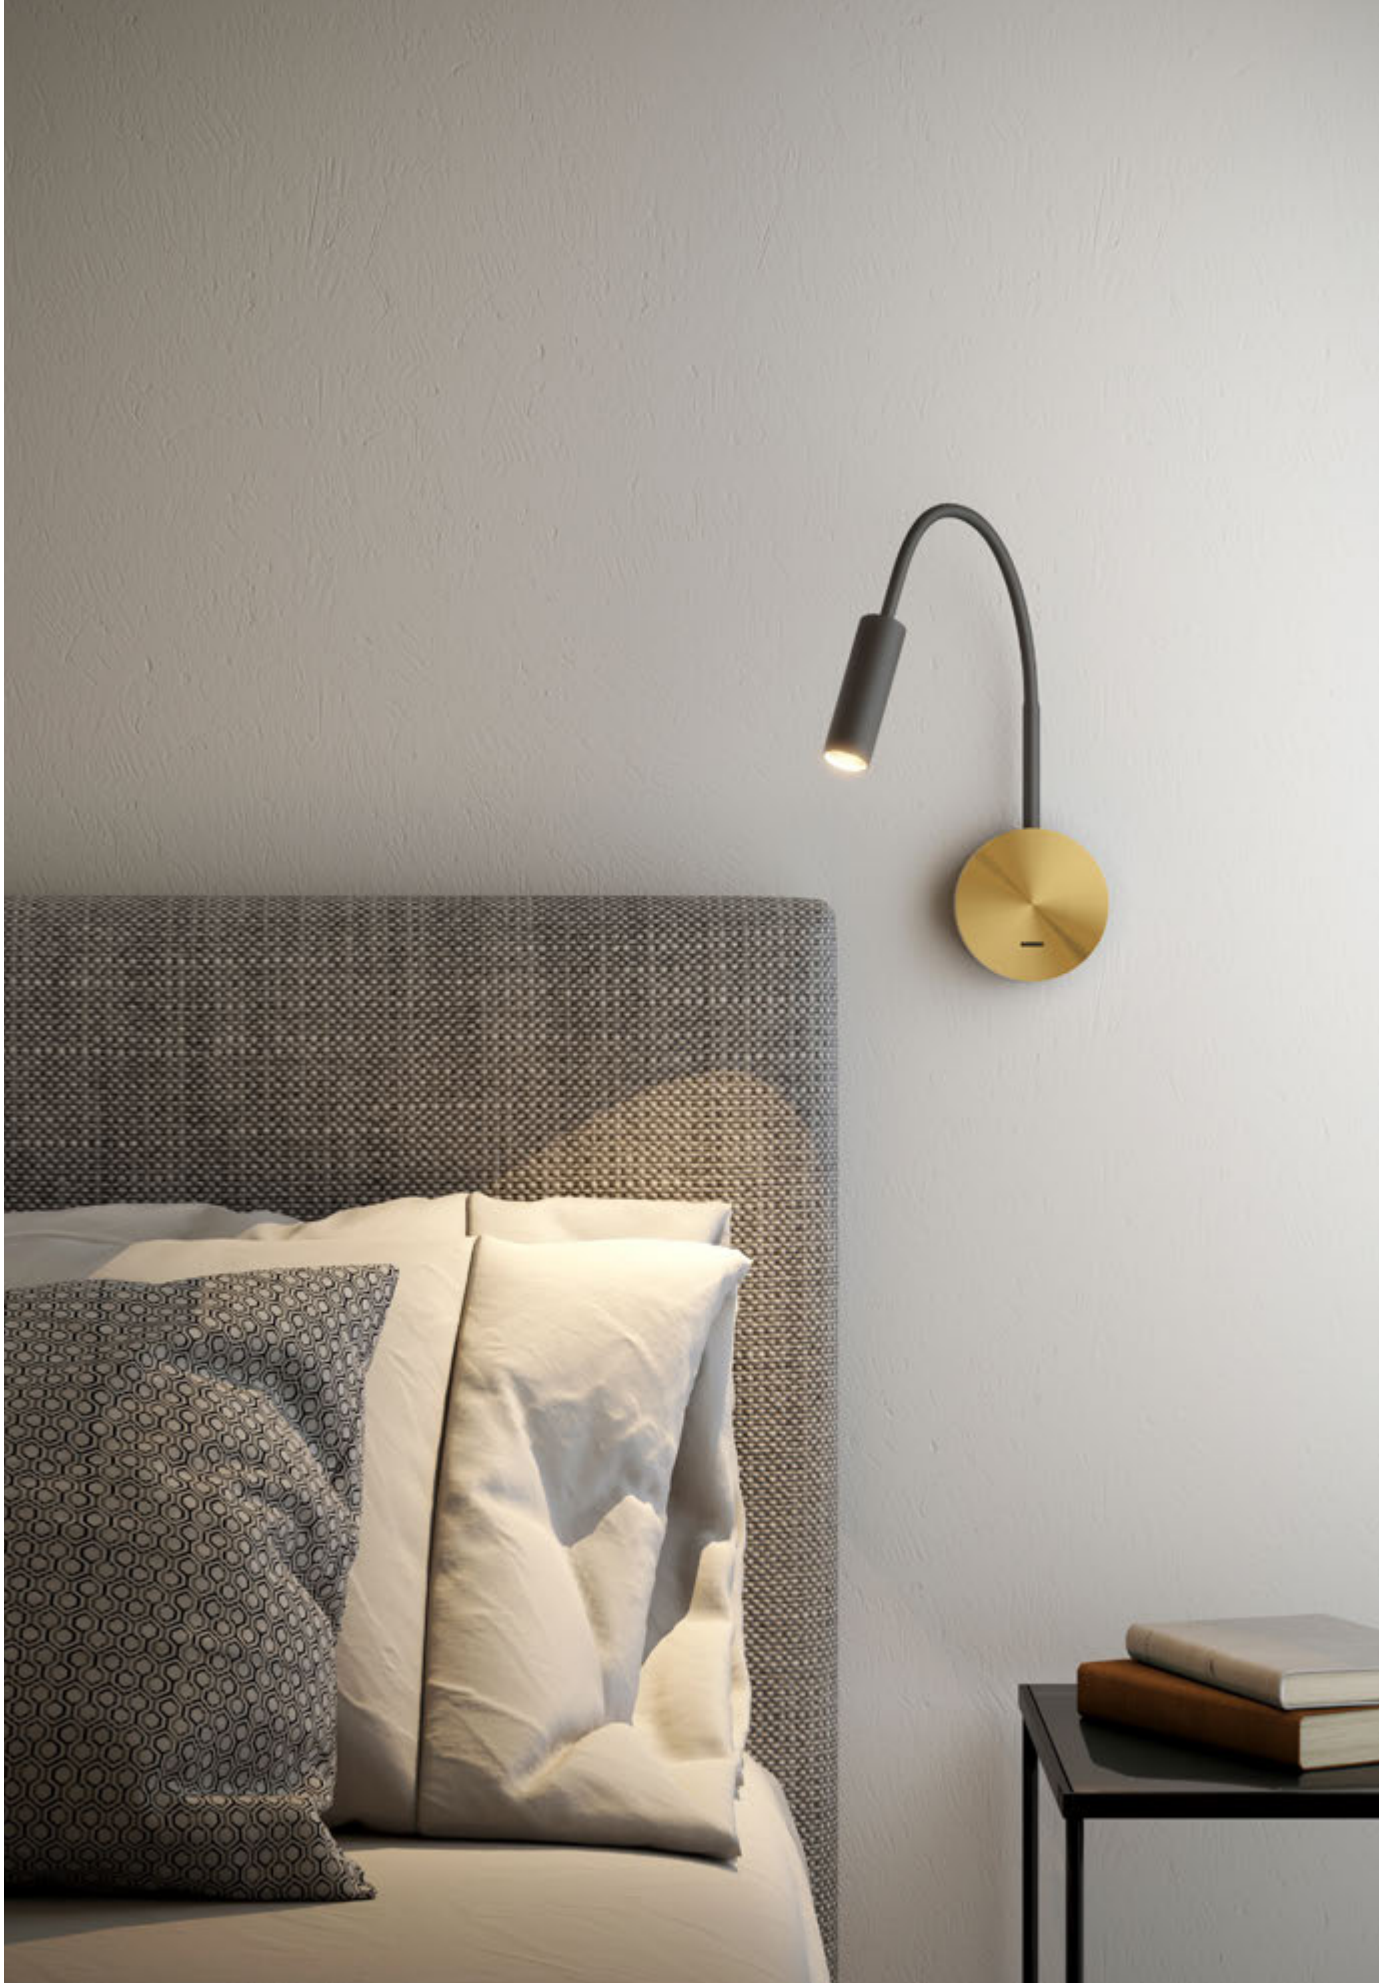






- Wall luminaire
- Integrated COB LED
- Adjustable spotlight
- On/off switch
- Aluminum body
- Mechanical magnet light cover





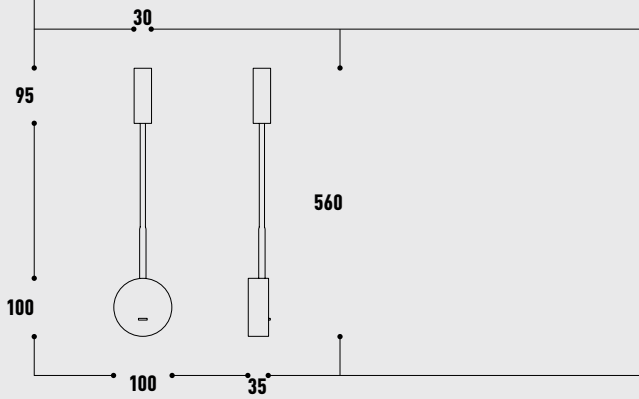

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	315	3000	3	700	50°	-	•	White	15137
								Black	15138
								Black/gold	15139

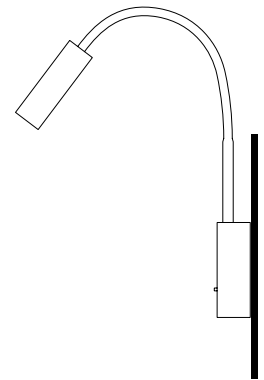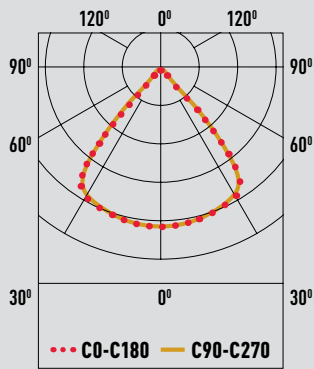

CARTON	Size (L*W*H) cm	PCS	CBM	kg
•	60*32*36	20	0.07	15.1

# NOVA LED




## COB Reading Light

Clean-lined and crisp, this wall-mounted reading light features an adjustable head, which makes it ideal for bedsides where a space-saving design is needed. Its base is equipped with a minimalist switch. A perfect bedside luminaire in the bedroom or in the hotel.







- Wall luminaire
- Integrated COB LED
- Adjustable spotlight
- On/off switch
- Aluminum body
- Mechanical magnet light cover

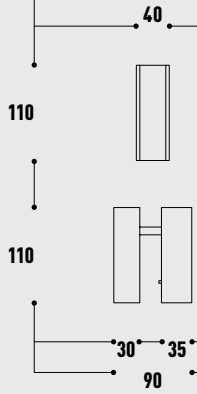

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	315	3000	3	700	50°	-	•	White	15130
								Black	15131
								Black/gold	15132

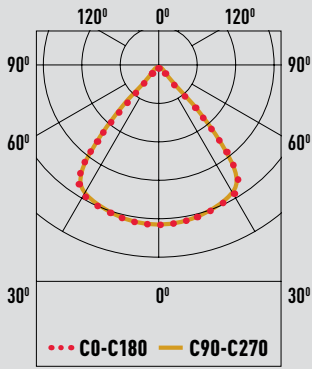

CARTON	Size (L*W*H) cm	PCS	CBM	kg
•	36*28.5*25.5	20	0.026	10.5


# SUSPENDED LIGHTS

JENNY  
JIMI

MOON



# JENNY



## Suspended Light


JENNY is a clean eye-catching piece with soft curves and gentle angles. Whether it is used in domestic or public spaces it occupies the space elegantly and effectively. It is perfect for multiple installations, whether in clusters or in a linear fashion. Available in white, black and brushed gold.









- Integrated COB LED
- Aluminum body
- Various canopy options
- CRI 90

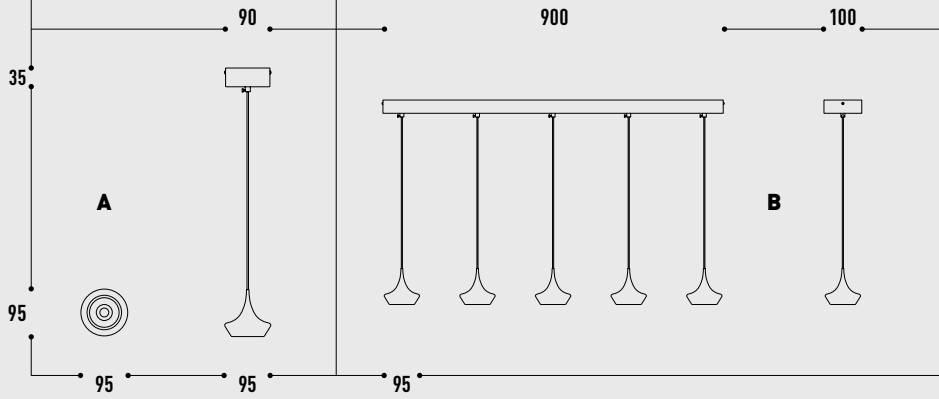


LED	lm	K	W	INPUT V	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	595	3000	5	24	60°	-	A	White	15053
								Black	15054
								Gold/Black	15055
COB	595x5	3000	5x5	24	60°	-	B	White	15057
								Black	15058
								Gold/Black	15056

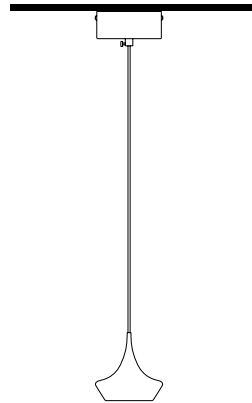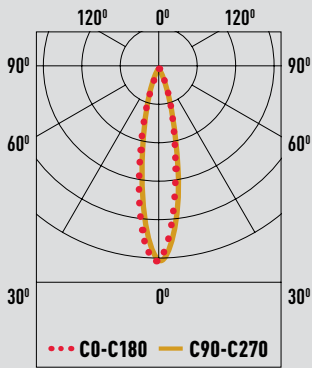

CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	66*21*53	20	0.07	18.9
B	83*13*19.5	1	0.02	4.9

# JIMI




## Suspended Light

JIMI is a thin pendant mount fixture. A metal cylinder that holds an acrylic diffuser in a minimalist design. Two body heights and availability of models with CRI90 make it easy to adapt the luminaire to the needs of the interior. Install solo or in a cluster and personalize by choosing your own hanging lengths.







- Integrated COB LED
- Aluminum body
- CRI 90

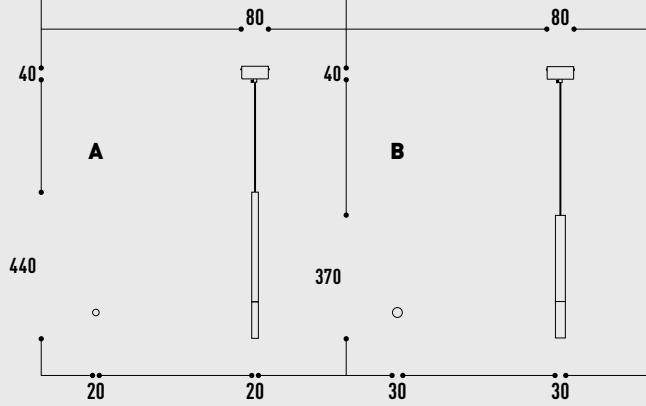

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
LED	300	3000	6	150	-	-	<b>A</b>	White	15906
								Black	15907
								Gold	15908
LED	400	3000	8	200	-	-	<b>B</b>	White	15909
								Black	15910
								Gold	15911

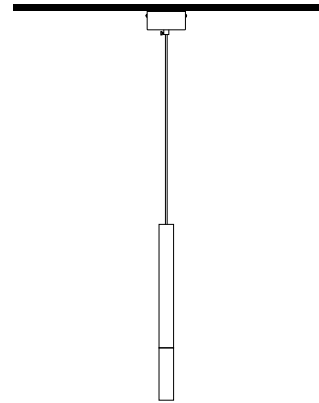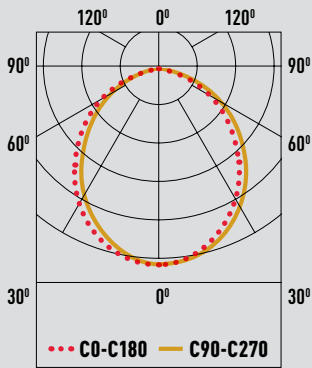

CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	46*36.5*45.5	10	0.07	8.2
B	46*36.5*52.5	20	0.09	8.8

# MOON



## Suspended Light


MOON is a single LED retro styled sphere shaped pendant. The top shade connects with the lower half at the equator of the sphere, ending on a white opal pvc diffuser. The sphere is tiltable with 90° movement. When lit the light creates uniform light distribution into the surrounding area.









- Integrated COB LED
- Anti glare effect
- Aluminum body
- Various cable lengths  
up to 5 meters
- CRI 90

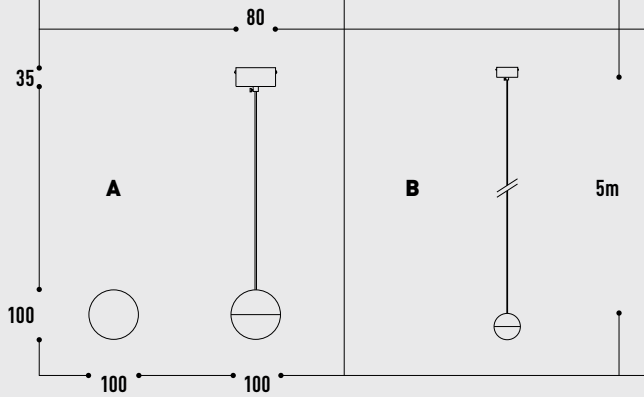

LED	lm	K	W	INPUT mA	OPTIC	CUT OUT mm	Type	Colour	Item no.
COB	525	3000	8	700	90°	-	A	Black	15286
								Gold	15285
COB	525	3000	8	700	90°	-	B	Black	15287
								Gold	15288

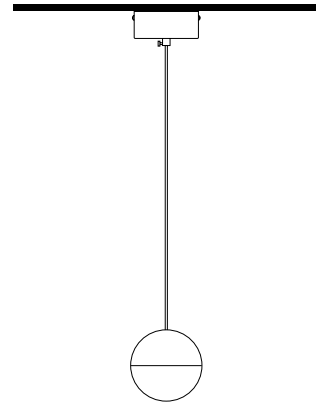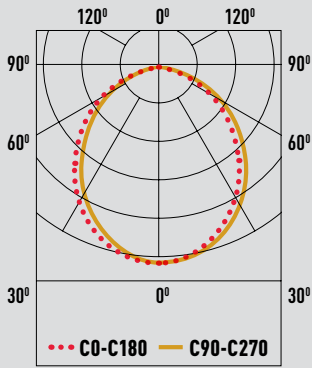


CARTON	Size (L*W*H) cm	PCS	CBM	kg
A	54.5*23*36.5	20	0.05	14.1
B	54.5*23*20	10	0.03	7.6

# DOTTA RECESSED LUMINAIRES

Multi function recessed system, with plenty of variations. Aluminum body integrated with COB LED lights. Trim or trimless options with many accessories. Easy to install thanks to its special tool box.

ACRYLIC  
CONE  
SQUARE


SPOT  
WALL-WASHER

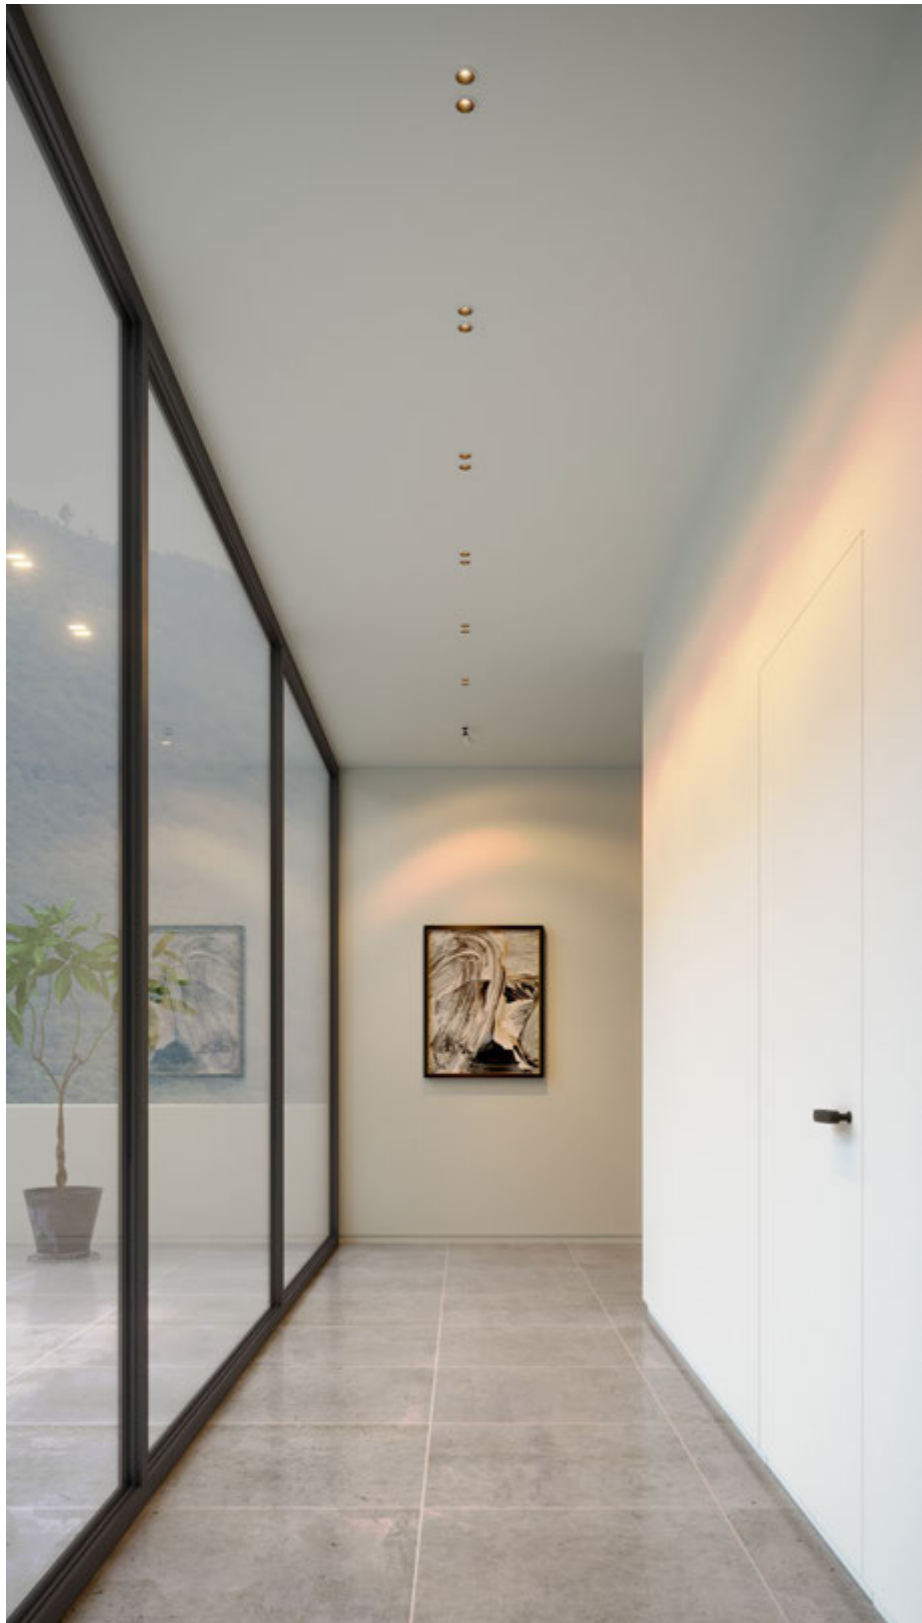


# INSTALLATION



Lighting fixture & driver



Tool Kit

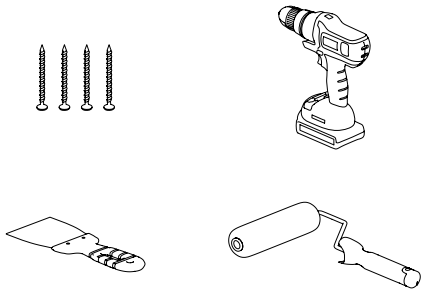


Installation is a simple process thanks to the innovative drill tool kit. Final finishing needs a minimum amount of plaster work.

## 1. Drilling the hole



## 2. Installation of the frame

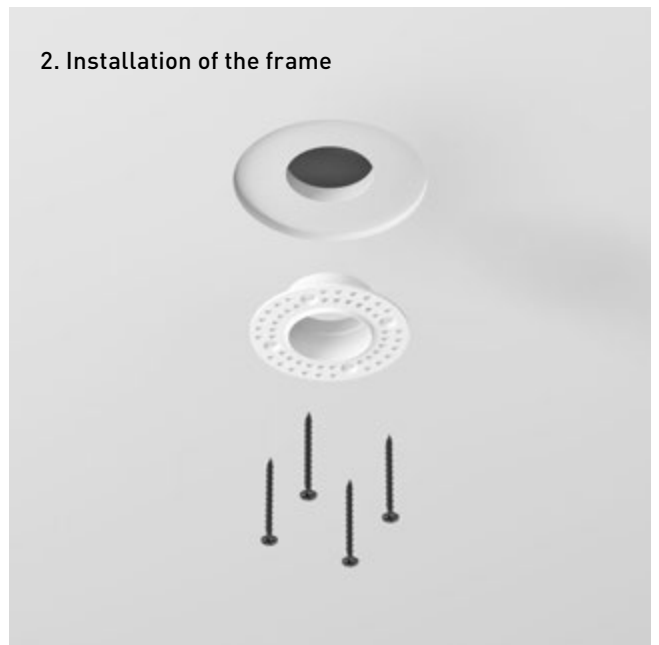

## 3. Plastering & paint work




#### 4. Positioning the power supply



#### 5. Installation of the fixture




#### 6.

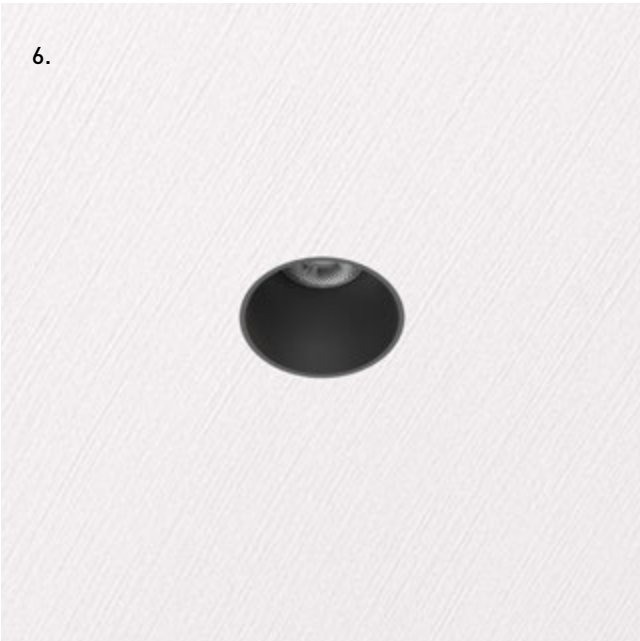

## MAINTENANCE

1.

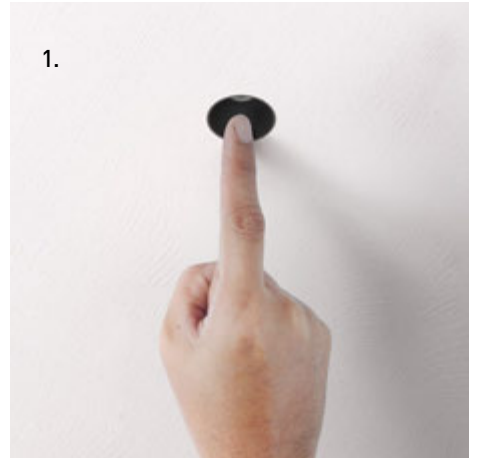

2.



The power supply and the fixture can be removed at any time by simply pressing the fixture once and pulling the fixture.

# ACRYLIC

- Wide range of accessories.
- Integration with Low Voltage.
- Dimming version available.
- CRI 90.







**OPTIONS**

		<p style="text-align: center;"><b>Acr-15206</b></p>
--	--	---

**ACRYLIC 9W**

<table border="1"> <thead> <tr> <th>lm</th> <th>K</th> <th>W</th> <th>Cut-out (mm)</th> <th>Control</th> <th>Lens</th> </tr> </thead> <tbody> <tr> <td>370</td> <td>3000</td> <td>9</td> <td>Ø 39 x Ø 85</td> <td>On-Off</td> <td>30°</td> </tr> </tbody> </table>	lm	K	W	Cut-out (mm)	Control	Lens	370	3000	9	Ø 39 x Ø 85	On-Off	30°	<p><b>Dimming</b></p> <hr/> <p>TRIAC* 15217</p> <hr/> <p>10°* 15216</p>	<p style="text-align: center;"><b>Tool Kit*</b></p> <p style="text-align: center;">152045</p>	<p style="text-align: center;"><b>Round Trimless*</b></p> <p style="text-align: center;">15210</p>
lm	K	W	Cut-out (mm)	Control	Lens										
370	3000	9	Ø 39 x Ø 85	On-Off	30°										

		<p style="text-align: center;"><b>Acr-15206</b></p>
--	--	---

**ACRYLIC 9W (Trim)**

<table border="1"> <thead> <tr> <th>lm</th> <th>K</th> <th>W</th> <th>Cut-out (mm)</th> <th>Control</th> <th>Lens</th> </tr> </thead> <tbody> <tr> <td>370</td> <td>3000</td> <td>9</td> <td>Ø 44</td> <td>On-Off</td> <td>30°</td> </tr> </tbody> </table>	lm	K	W	Cut-out (mm)	Control	Lens	370	3000	9	Ø 44	On-Off	30°	<p><b>Dimming</b></p> <hr/> <p>TRIAC* 15217</p> <hr/> <p>10°* 15216</p>	<p style="text-align: center;"><b>Round Trim (W)*</b></p> <p style="text-align: center;">15211</p>	<p style="text-align: center;"><b>Round Trim (B)*</b></p> <p style="text-align: center;">15367</p>
lm	K	W	Cut-out (mm)	Control	Lens										
370	3000	9	Ø 44	On-Off	30°										

\* not included

# CONE






- Excellent optical control.
- Interchangeable lenses.
- Wide range of accessories.
- Integration with Low Voltage.
- Dimming version available.
- CRI 90.





Cohen Alon Architecture








**OPTIONS**



		 <b>W-15204</b>  <b>B-15205</b>  <b>G-15365</b>
---	--	--

**CONE 9W**

lm	K	W	Cut-out (mm)	Control	Lens	Dimming	Tool Kit*	Round Trimless*
560	3000	9	Ø 39 x Ø 85	On-Off	30°	TRIAC* 15217	 152045	 15210
						10°* 15216		

		 <b>W-15204</b>  <b>B-15205</b>  <b>G-15365</b>
---	---	--


**CONE 9W (Trim)**

lm	K	W	Cut-out (mm)	Control	Lens	Dimming	Matt White*	Matt Black*
560	3000	9	Ø 44	On-Off	30°	TRIAC* 15217	 15211	 15367
						10°* 15216		

\* not included

# SQUARE

- Excellent optical control.
- Interchangeable lenses.
- Wide range of accessories.
- Integration with Low Voltage.
- Dimming version available.
- CRI 90.

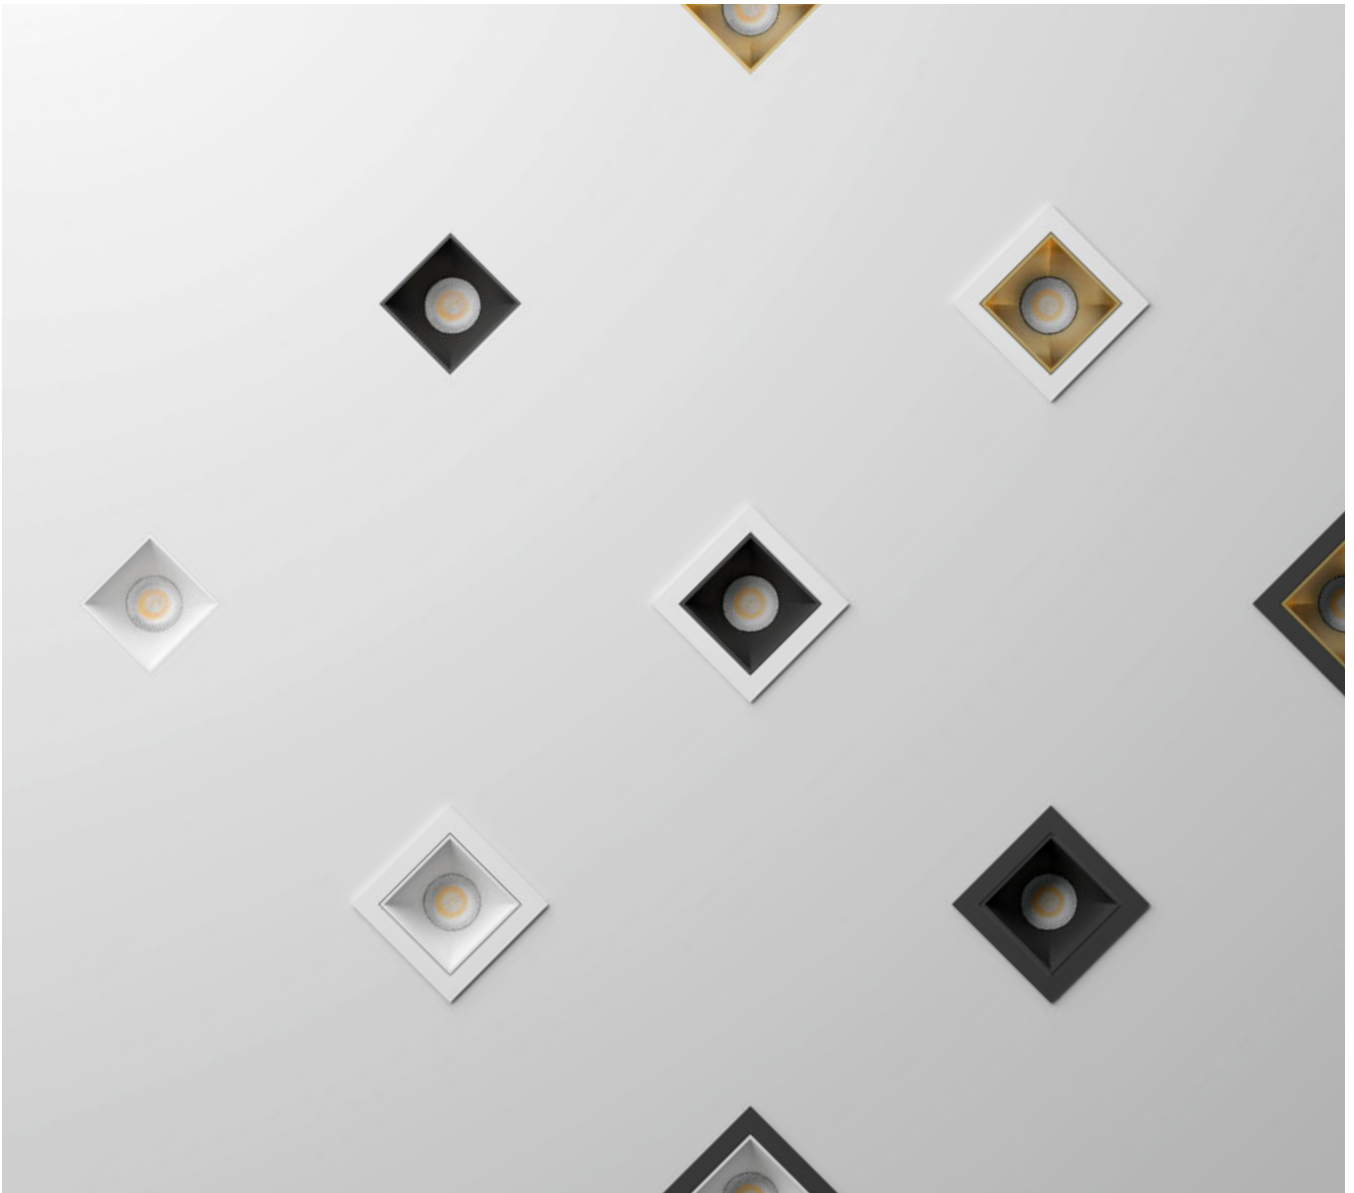



### OPTIONS

--	--	--

## SQUARE 9W

lm	K	W	Cut-out (mm)	Control	Lens	Dimming		
573	3000	9	39x39 x Ø 85	On-Off	30°	TRIAC* 15217		
							10°* 15216	<b>Square Trimless*</b> 15214

--	--	--

## SQUARE 9W (Trim)

lm	K	W	Cut-out (mm)	Control	Lens	Dimming			
573	3000	9	43x43	On-Off	30°	TRIAC* 15217			
							10°* 15216	<b>Matt White*</b> 15215	<b>Matt Black*</b> 15368

\* not included

# SPOT

- Wide range of accessories.
- Integration with Low Voltage.
- Dimming version available.
- CRI 90.





**OPTIONS**

		<p><b>WB-15209</b>      <b>BB-15370</b></p>
--	--	---

**SPOT 7W**

<table border="1"> <thead> <tr> <th>lm</th> <th>K</th> <th>W</th> <th>Cut-out (mm)</th> <th>Control</th> <th>Lens</th> </tr> </thead> <tbody> <tr> <td>464</td> <td>3000</td> <td>7</td> <td>Ø 39 x Ø 85</td> <td>On-Off</td> <td>36°</td> </tr> </tbody> </table>	lm	K	W	Cut-out (mm)	Control	Lens	464	3000	7	Ø 39 x Ø 85	On-Off	36°	<p><b>Dimming</b></p> <p>TRIAC* 15218</p>	<p><b>Tool Kit*</b></p> <p>152045</p>	<p><b>Round Trimless*</b></p> <p>15210</p>
lm	K	W	Cut-out (mm)	Control	Lens										
464	3000	7	Ø 39 x Ø 85	On-Off	36°										

		<p><b>WB-15209</b>      <b>BB-15370</b></p>
--	--	---

**SPOT 7W (Trim)**

<table border="1"> <thead> <tr> <th>lm</th> <th>K</th> <th>W</th> <th>Cut-out (mm)</th> <th>Control</th> <th>Lens</th> </tr> </thead> <tbody> <tr> <td>464</td> <td>3000</td> <td>7</td> <td>Ø 44</td> <td>On-Off</td> <td>36°</td> </tr> </tbody> </table>	lm	K	W	Cut-out (mm)	Control	Lens	464	3000	7	Ø 44	On-Off	36°	<p><b>Dimming</b></p> <p>TRIAC* 15218</p>	<p><b>Matt White*</b></p> <p>15211</p>	<p><b>Matt Black*</b></p> <p>15367</p>
lm	K	W	Cut-out (mm)	Control	Lens										
464	3000	7	Ø 44	On-Off	36°										

\* not included

# WALL-WASHER



- Wide range of accessories.
- Integration with Low Voltage.
- Dimming version available.
- CRI 90.











**OPTIONS**



		<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">   <b>W-15207</b> </div> <div style="text-align: center;">   <b>B-15208</b> </div> </div>
--	--	---

**WALL-WASHER 6W**

<table border="1"> <thead> <tr> <th>lm</th> <th>K</th> <th>W</th> <th>Cut-out (mm)</th> <th>Control</th> <th>Lens</th> </tr> </thead> <tbody> <tr> <td>253</td> <td>3000</td> <td>6</td> <td>Ø 39 x Ø 85</td> <td>On-Off</td> <td>45°</td> </tr> </tbody> </table>	lm	K	W	Cut-out (mm)	Control	Lens	253	3000	6	Ø 39 x Ø 85	On-Off	45°	<p><b>Dimming</b></p> <p>TRIAC* 15217</p>	 <b>Tool Kit*</b> 152045	 <b>Round Trimless*</b> 15210
lm	K	W	Cut-out (mm)	Control	Lens										
253	3000	6	Ø 39 x Ø 85	On-Off	45°										

		<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">   <b>W-15207</b> </div> <div style="text-align: center;">   <b>B-15208</b> </div> </div>
--	--	---

**WALL-WASHER 6W (Trim)**

<table border="1"> <thead> <tr> <th>lm</th> <th>K</th> <th>W</th> <th>Cut-out (mm)</th> <th>Control</th> <th>Lens</th> </tr> </thead> <tbody> <tr> <td>253</td> <td>3000</td> <td>6</td> <td>Ø 44</td> <td>On-Off</td> <td>45°</td> </tr> </tbody> </table>	lm	K	W	Cut-out (mm)	Control	Lens	253	3000	6	Ø 44	On-Off	45°	<p><b>Dimming</b></p> <p>TRIAC* 15217</p>	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">   <b>Matt White*</b>            15211         </div> <div style="text-align: center;">   <b>Matt Black*</b>            15367         </div> </div>
lm	K	W	Cut-out (mm)	Control	Lens									
253	3000	6	Ø 44	On-Off	45°									

\* not included

# FLOW

# LOW VOLTAGE

# SYSTEM

Flow system is a multi function system based on 48V. Flow system offers architects plenty of design options. This system with a clicking mechanism can be installed both vertically and horizontally, and has recessed, surface mounted or pendant versions.

TON

TOMI

LIGHT STRIPES

DOTS

OUT


MOON




# TRACKS




- Low Voltage System.
- Minimal design.
- Different kinds of applications.
- Wide range of accessories.

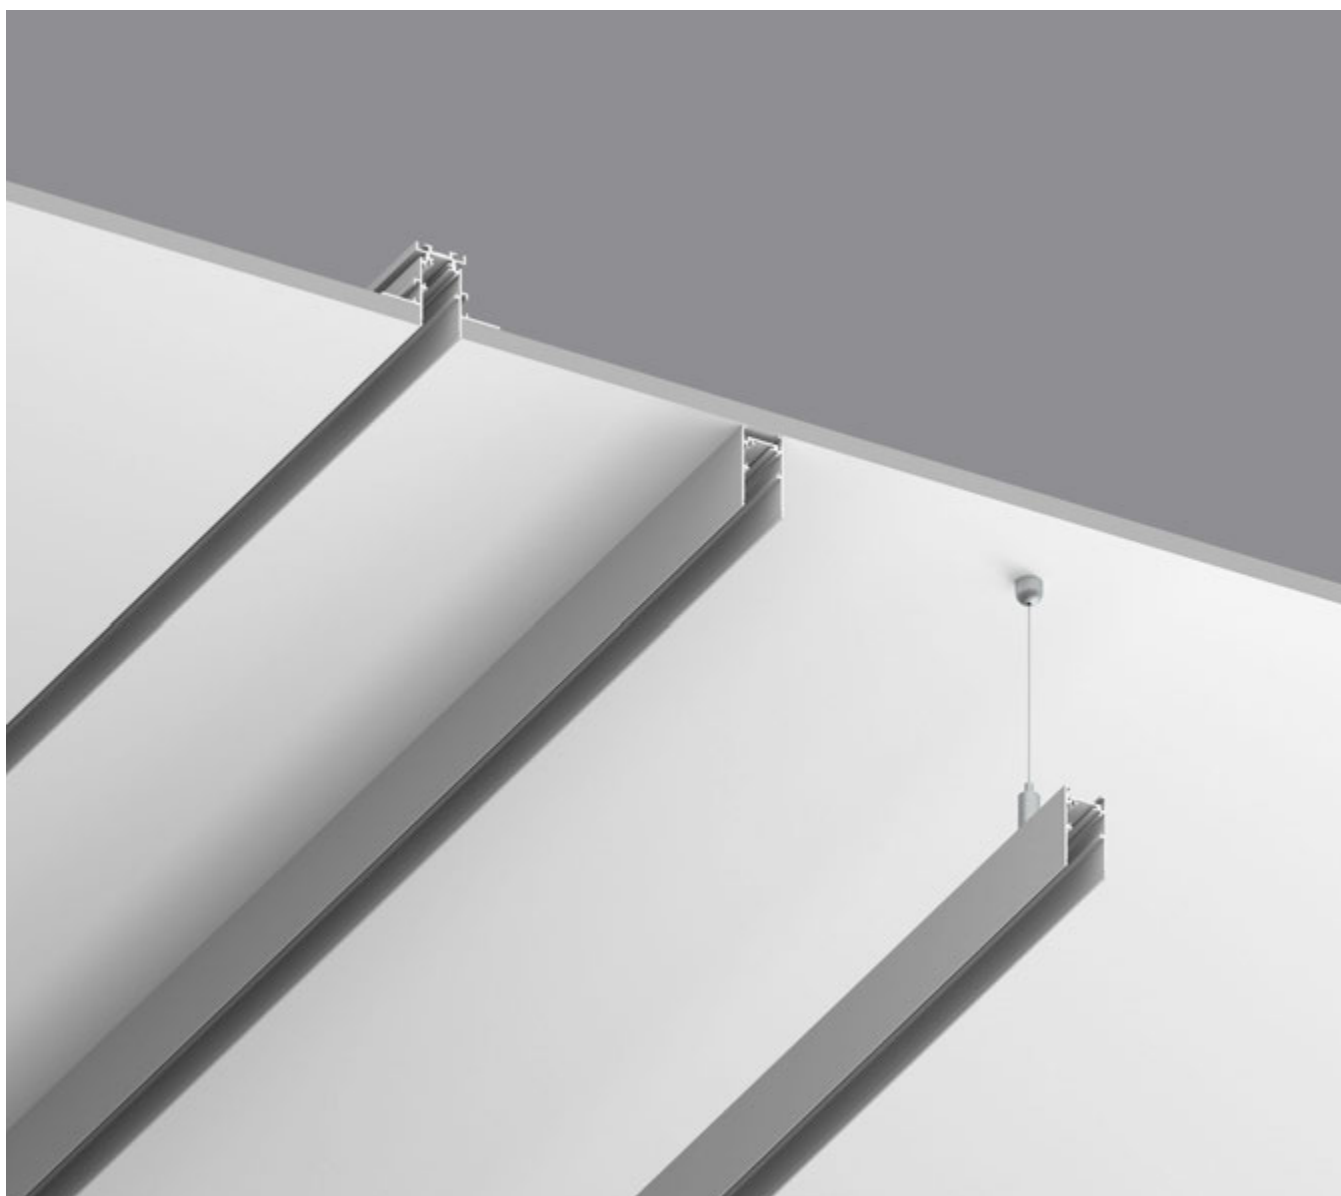


## RECESSED

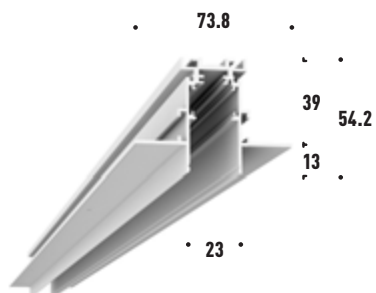


2m TRACK | 15324  
 3m TRACK | 15325  
 Different Lengths | upon request

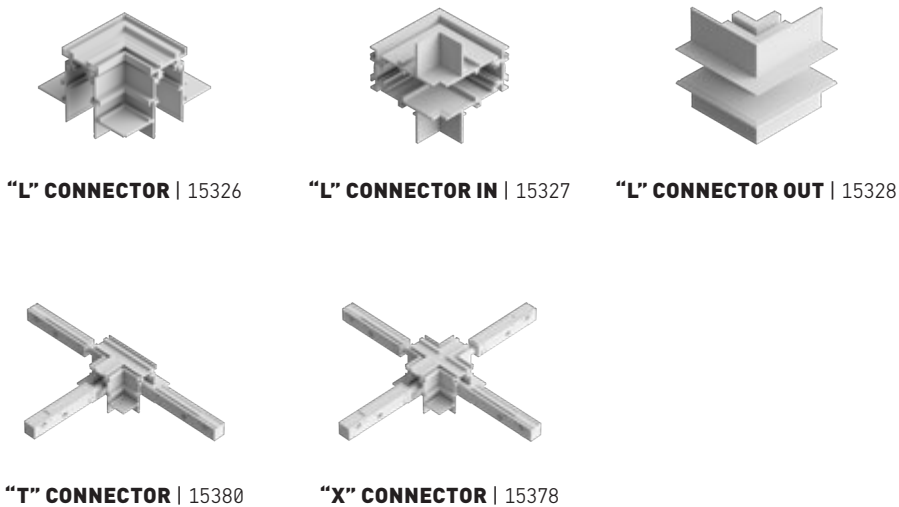

## SURFACE/SUSPENDED\*




2m TRACK | 15330  
 3m TRACK | 15276  
 Different Lengths | upon request

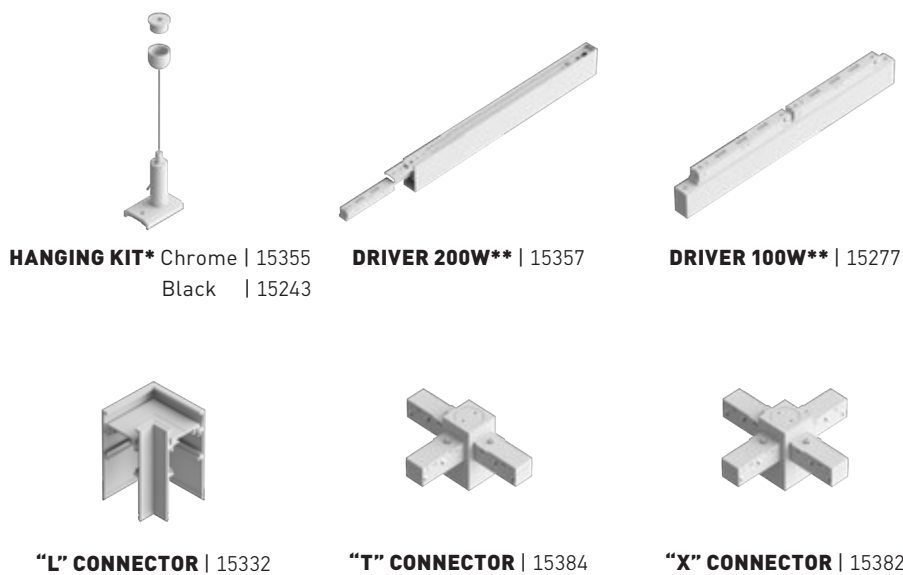


CONNECTOR STRAIGHT | 15376



LIVE END | 15281



LIVE END DIM | 15333




CONNECTOR | 15334

\*\* Drivers to be used on surface tracks which will be installed on concrete.


# TRACKS




- Low Voltage System.
- Minimal design.
- Different kinds of applications.
- Wide range of accessories.

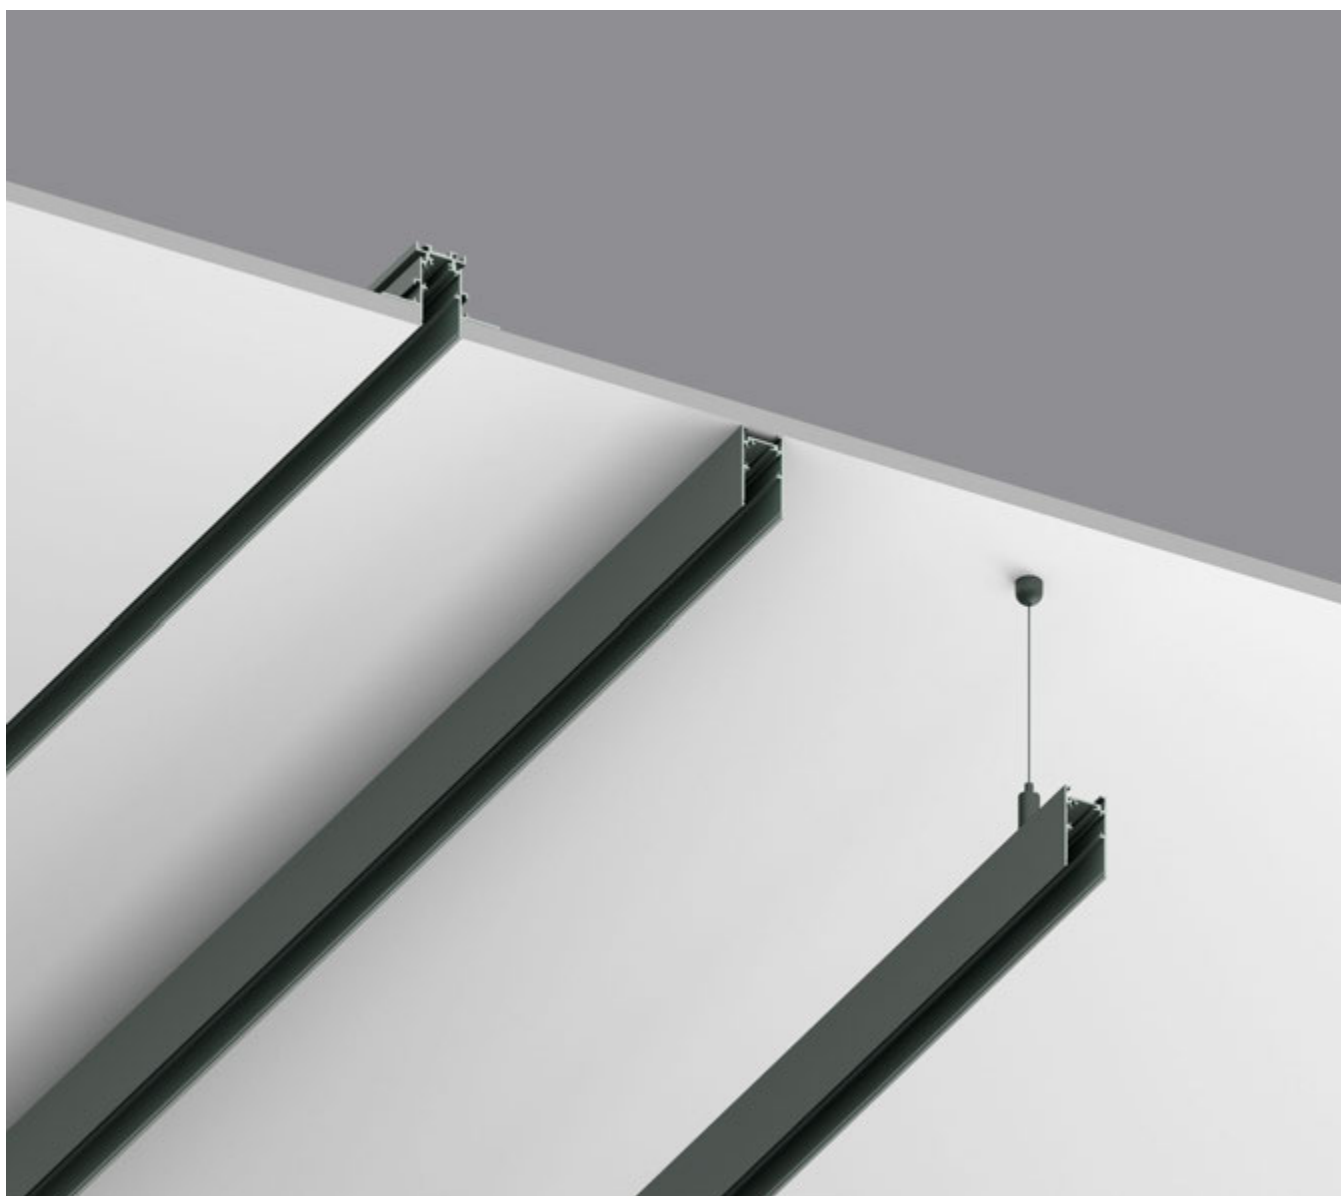


## RECESSED

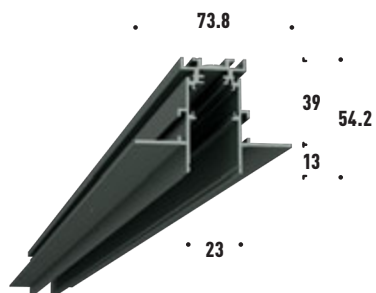


2m TRACK | 15236  
 3m TRACK | 15237  
 Different Lengths | upon request




"L" CONNECTOR | 15238




"L" CONNECTOR IN | 15239



"L" CONNECTOR OUT | 15240




"T" CONNECTOR | 15379



"X" CONNECTOR | 15377

## SURFACE/SUSPENDED\*

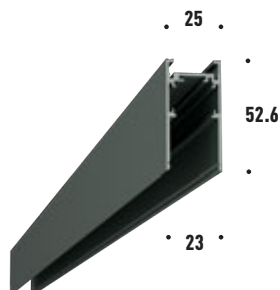


2m TRACK | 15329  
 3m TRACK | 15242  
 Different Lengths | upon request




HANGING KIT\* Black | 15243  
 Chrome | 15355



DRIVER 200W\*\* | 15356



DRIVER 100W\*\* | 15272



"L" CONNECTOR | 15244




"T" CONNECTOR | 15383




"X" CONNECTOR | 15381



CONNECTOR STRAIGHT | 15375



LIVE END | 15280



LIVE END DIM | 15247




CONNECTOR | 15248

\*\* Drivers to be used on surface tracks which will be installed on concrete.


# TRACKS CONNECTORS

---

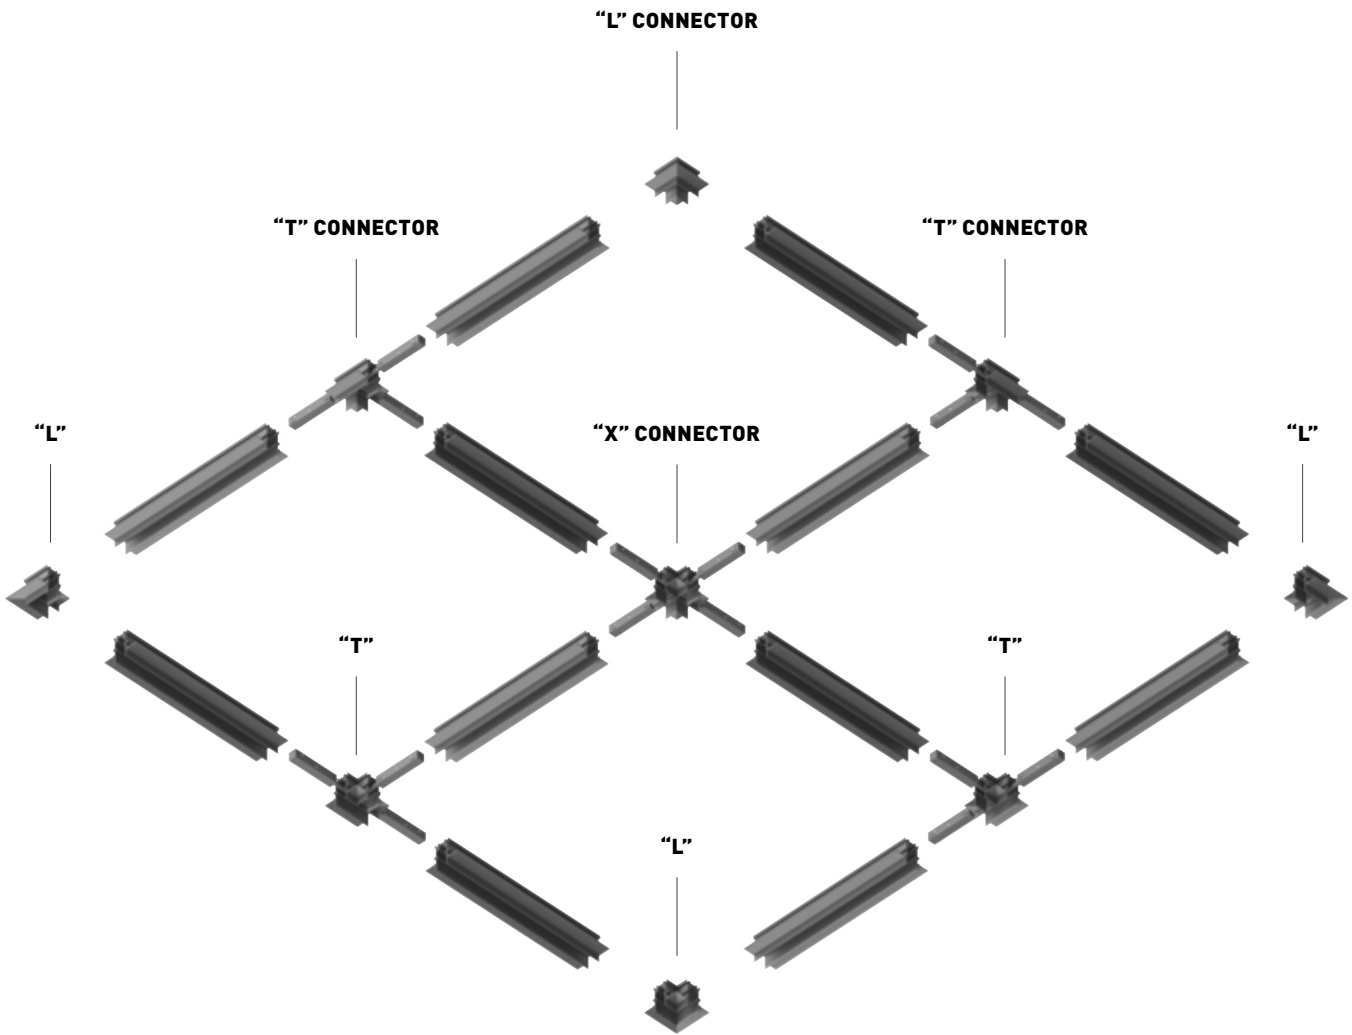

## RECESSED

---



**"L" CONNECTOR** | B-15238  
| W-15326




**"T" CONNECTOR** | B-15379  
| W-15380



**"X" CONNECTOR** | B-15377  
| W-15378



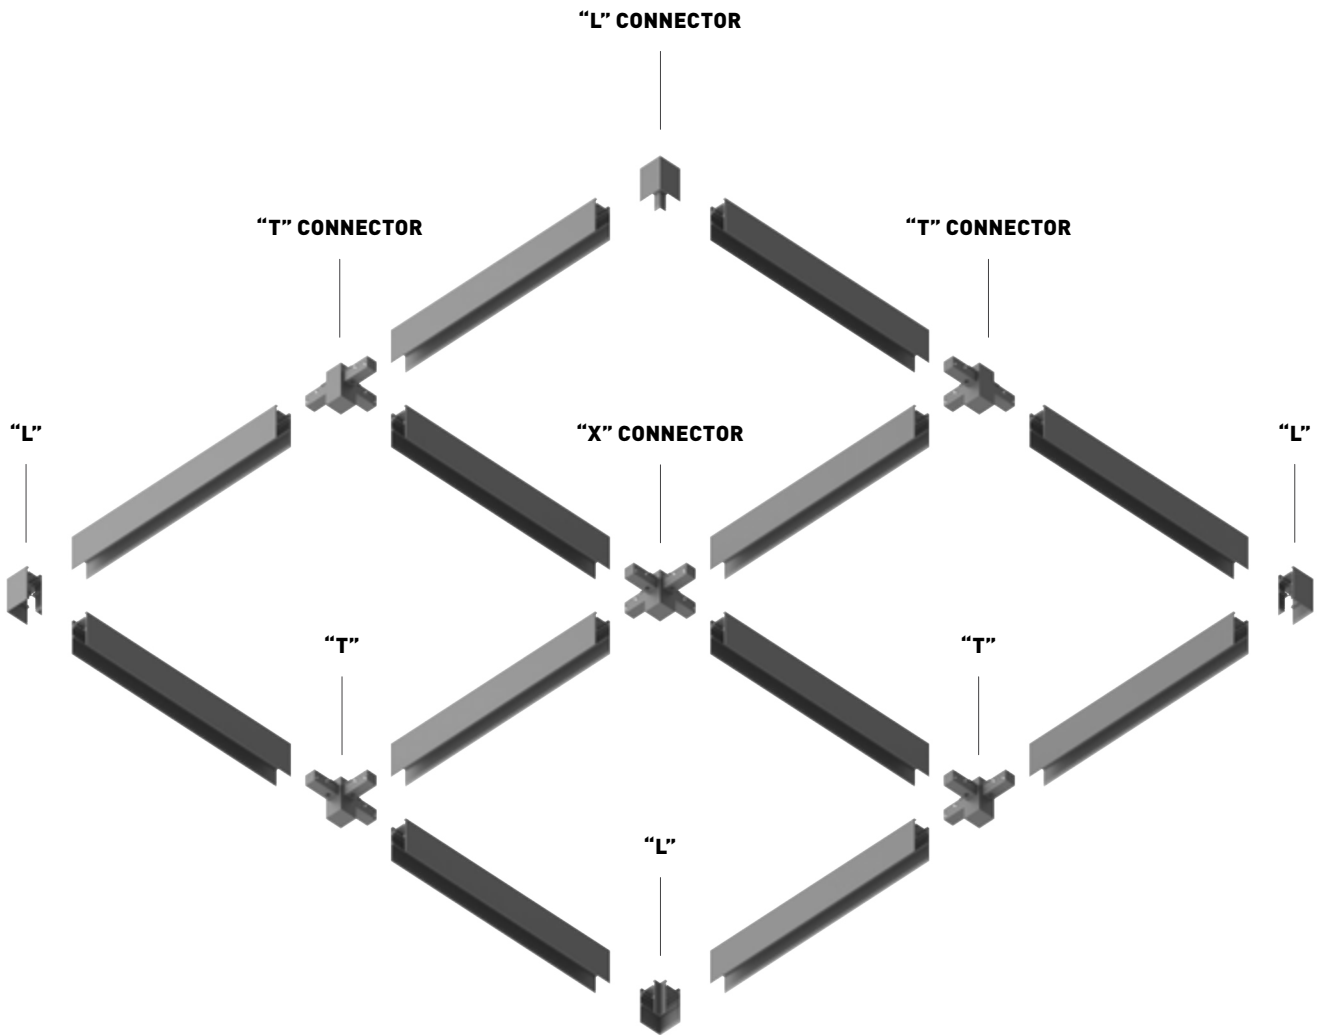

## SURFACE/SUSPENDED



**"L" CONNECTOR** | B-15244  
| W-15332



**"T" CONNECTOR** | B-15383  
| W-15384



**"X" CONNECTOR** | B-15381  
| W-15382




# TON



- Excellent optical control.
- Wide range of accessories.
- Integration with Low Voltage.
- DALI version available.
- CRI 90.






**OPTIONS**

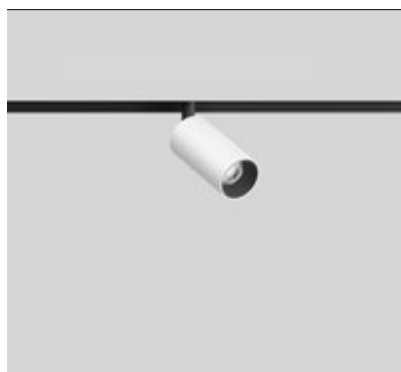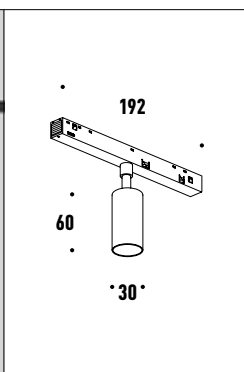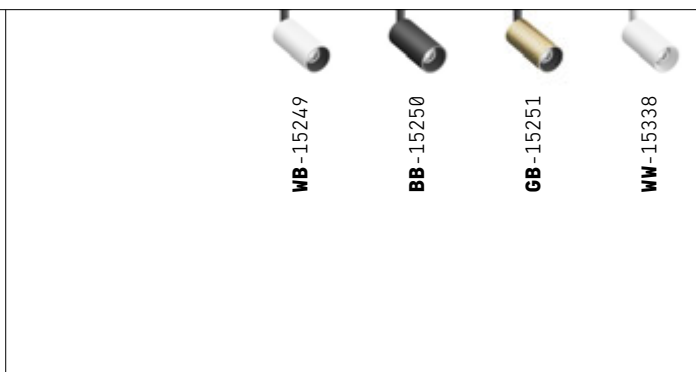		
---	---	--

**TON 6W**




lm	K	W	Control	Lens	Dimming
420	3000	6	On-Off	24°	0-10V* 15278 DALI* 15279
					36°* 15362 } 50°* 15363

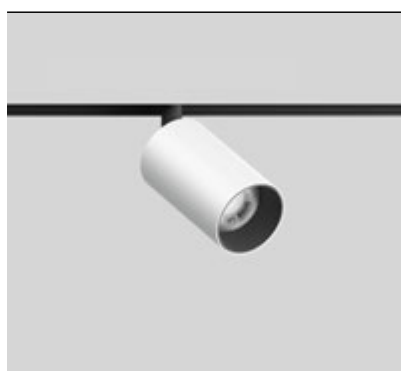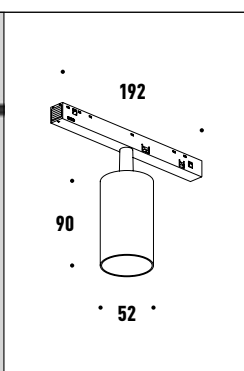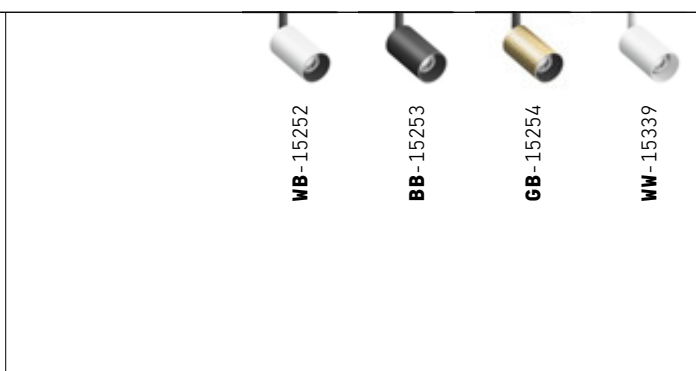		
--	--	---

**TON 11W**

lm	K	W	Control	Lens	Dimming
925	3000	11	On-Off	30°	0-10V* 15278 DALI* 15279
					15°* 15265 } 50°* 15266

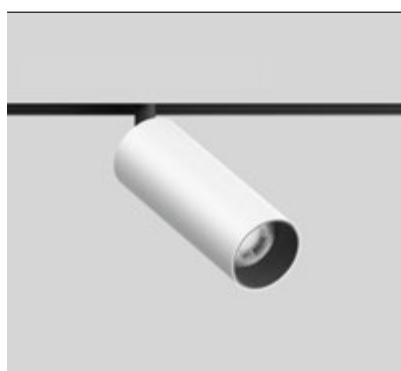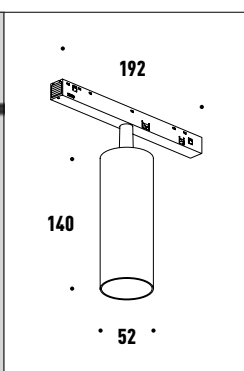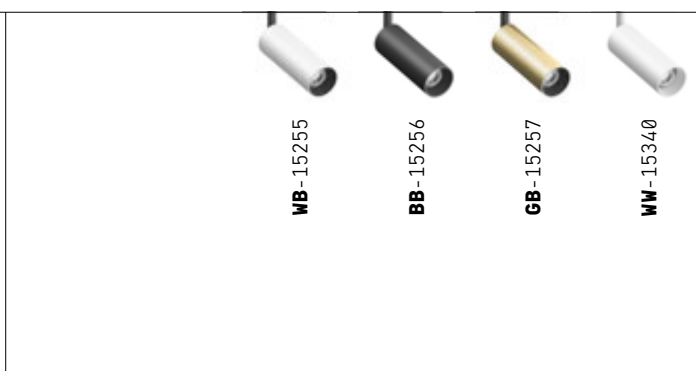

		
---	---	--

**TON 16W**


lm	K	W	Control	Lens	Dimming
1310	3000	16	On-Off	30°	0-10V* 15278 DALI* 15279
					15°* 15265 } 50°* 15266



\* not included





# TOMI

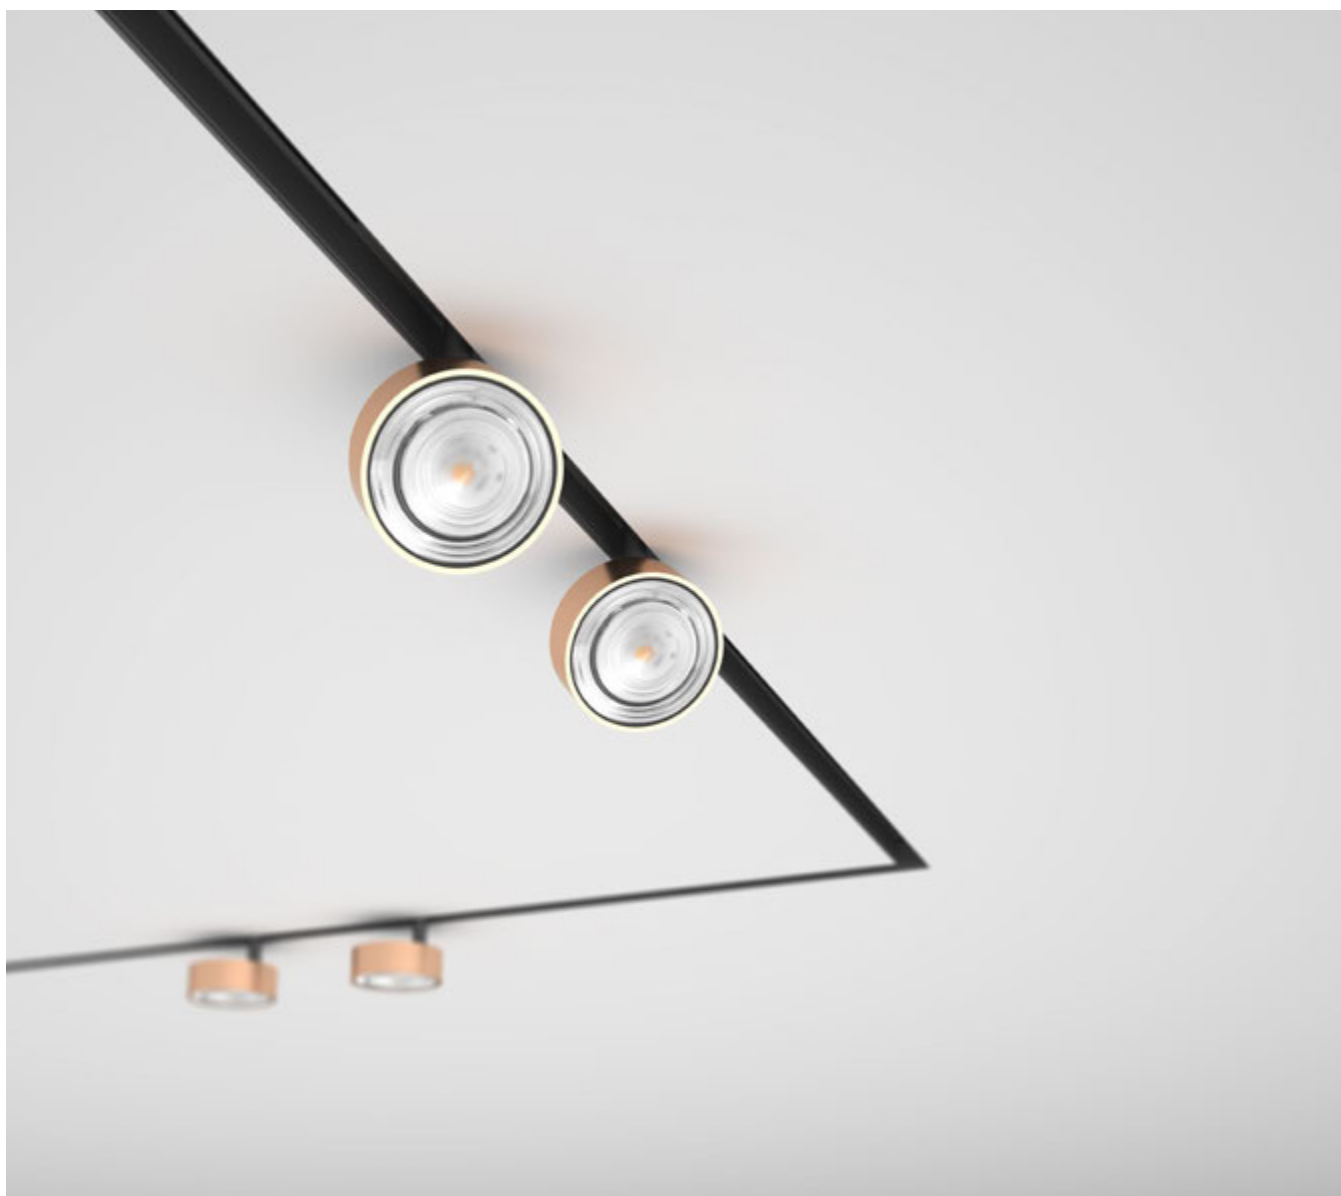- Excellent optical control.
- Available in different finishes.
- Integration with Low Voltage.
- DALI version available.
- CRI 90.













**OPTIONS**





		 <p><b>Total White-15360</b></p>  <p><b>Total Black-15361</b></p>
--	--	---

**TOMI 9W**

<table border="1"> <thead> <tr> <th>lm</th> <th>K</th> <th>W</th> <th>Control</th> <th>Lens</th> </tr> </thead> <tbody> <tr> <td>640</td> <td>3000</td> <td>9</td> <td>On-Off</td> <td>40°</td> </tr> </tbody> </table>	lm	K	W	Control	Lens	640	3000	9	On-Off	40°	<p><b>Dimming</b></p> <hr/> <p>0-10V* 15278</p> <hr/> <p>DALI* 15279</p> <hr/> <p>15°* 15346</p>	 <p><b>Brushed Gold*</b></p> <p>15348</p>	 <p><b>Brushed Rose Gold*</b></p> <p>15350</p>	 <p><b>Brushed Chrome*</b></p> <p>15352</p>	 <p><b>Matt White*</b></p> <p>15354</p>
lm	K	W	Control	Lens											
640	3000	9	On-Off	40°											

		 <p><b>Total White-15358</b></p>  <p><b>Total Black-15359</b></p>
---	---	---

**TOMI 13W**

<table border="1"> <thead> <tr> <th>lm</th> <th>K</th> <th>W</th> <th>Control</th> <th>Lens</th> </tr> </thead> <tbody> <tr> <td>1260</td> <td>3000</td> <td>13</td> <td>On-Off</td> <td>30°</td> </tr> </tbody> </table>	lm	K	W	Control	Lens	1260	3000	13	On-Off	30°	<p><b>Dimming</b></p> <hr/> <p>0-10V* 15278</p> <hr/> <p>DALI* 15279</p> <hr/> <p>15°* 15345</p>	 <p><b>Brushed Gold*</b></p> <p>15347</p>	 <p><b>Brushed Rose Gold*</b></p> <p>15349</p>	 <p><b>Brushed Chrome*</b></p> <p>15351</p>	 <p><b>Matt White*</b></p> <p>15353</p>
lm	K	W	Control	Lens											
1260	3000	13	On-Off	30°											

\* not included




# LIGHT STRIPE



- Clean minimal design.
- Diffused light effect.
- Integration with Low Voltage.
- DALI version available.



**OPTIONS**


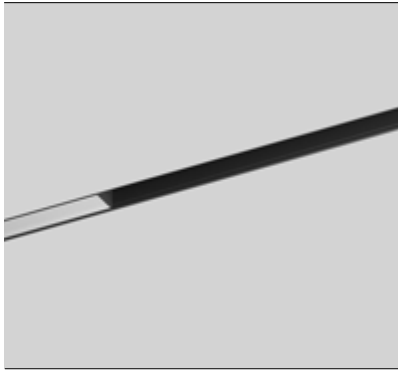


**B**-15260

**W**-15335

**LIGHT STRIPE 30cm**

lm	K	W	Control	Lens	Dimming
625	3000	14	On-Off	90°	0-10V* 15278 DALI* 15279


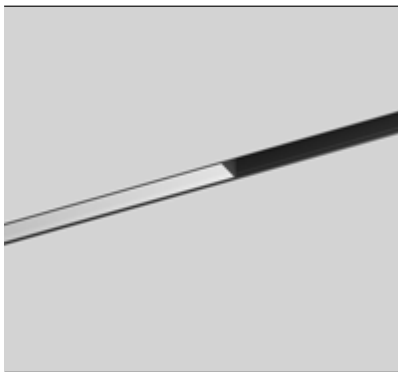


**B**-15261

**W**-15336

**LIGHT STRIPE 60cm**

lm	K	W	Control	Lens	Dimming
1090	3000	20	On-Off	90°	0-10V* 15278 DALI* 15279

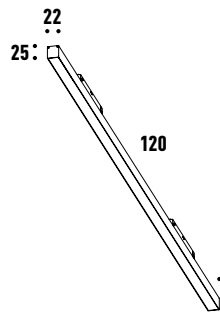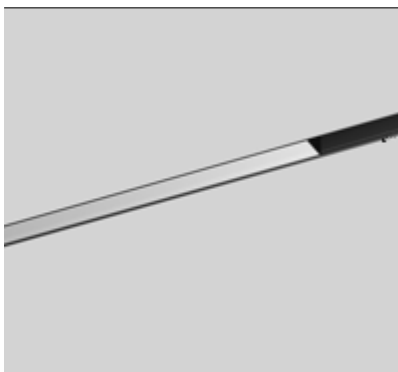

**B**-15262

**W**-15337

**LIGHT STRIPE 120cm**

lm	K	W	Control	Lens	Dimming
1850	3000	30	On-Off	90°	0-10V* 15278 DALI* 15279

\* not included

# DOTS


- Excellent optical control.
- Dark Light effect.
- Integration with Low Voltage.
- DALI version available.
- CRI 90.







### OPTIONS

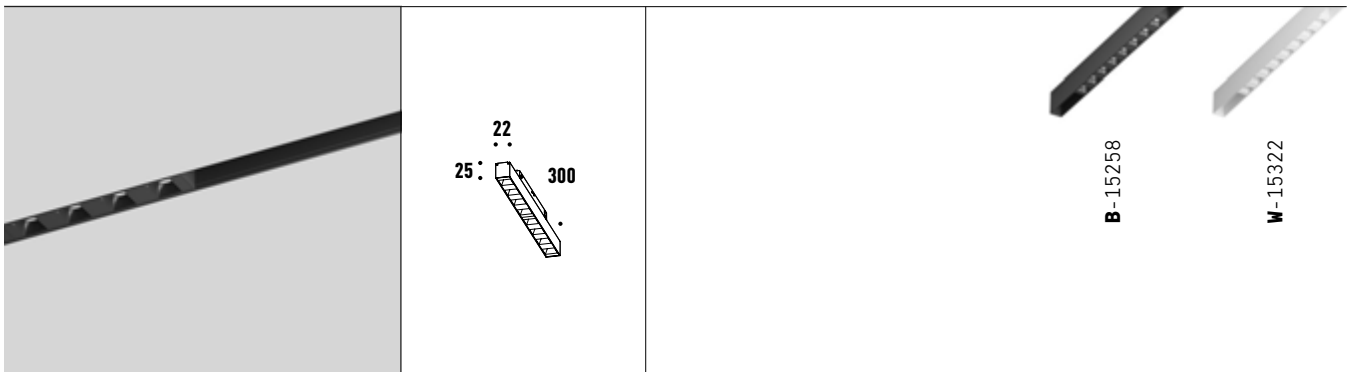


### DOTS 30cm

lm	K	W	Control	Lens
1320	3000	14	On-Off	24°

#### Dimming

0-10V*	15278
DALI*	15279

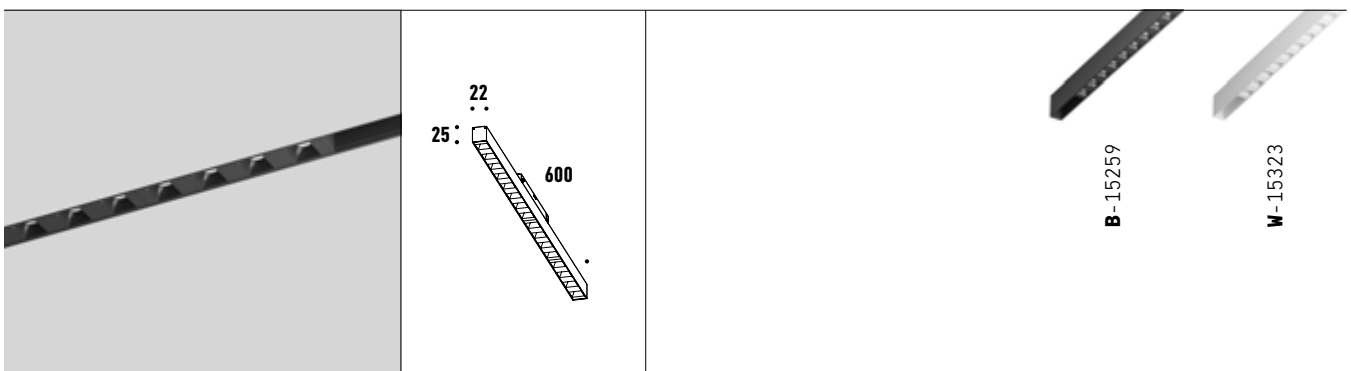

### DOTS 60cm

lm	K	W	Control	Lens
1955	3000	20	On-Off	24°

#### Dimming


0-10V*	15278
DALI*	15279

\* not included


# OUT



- Clean minimal design.
- Diffused light effect.
- Integration with Low Voltage.
- DALI version available.

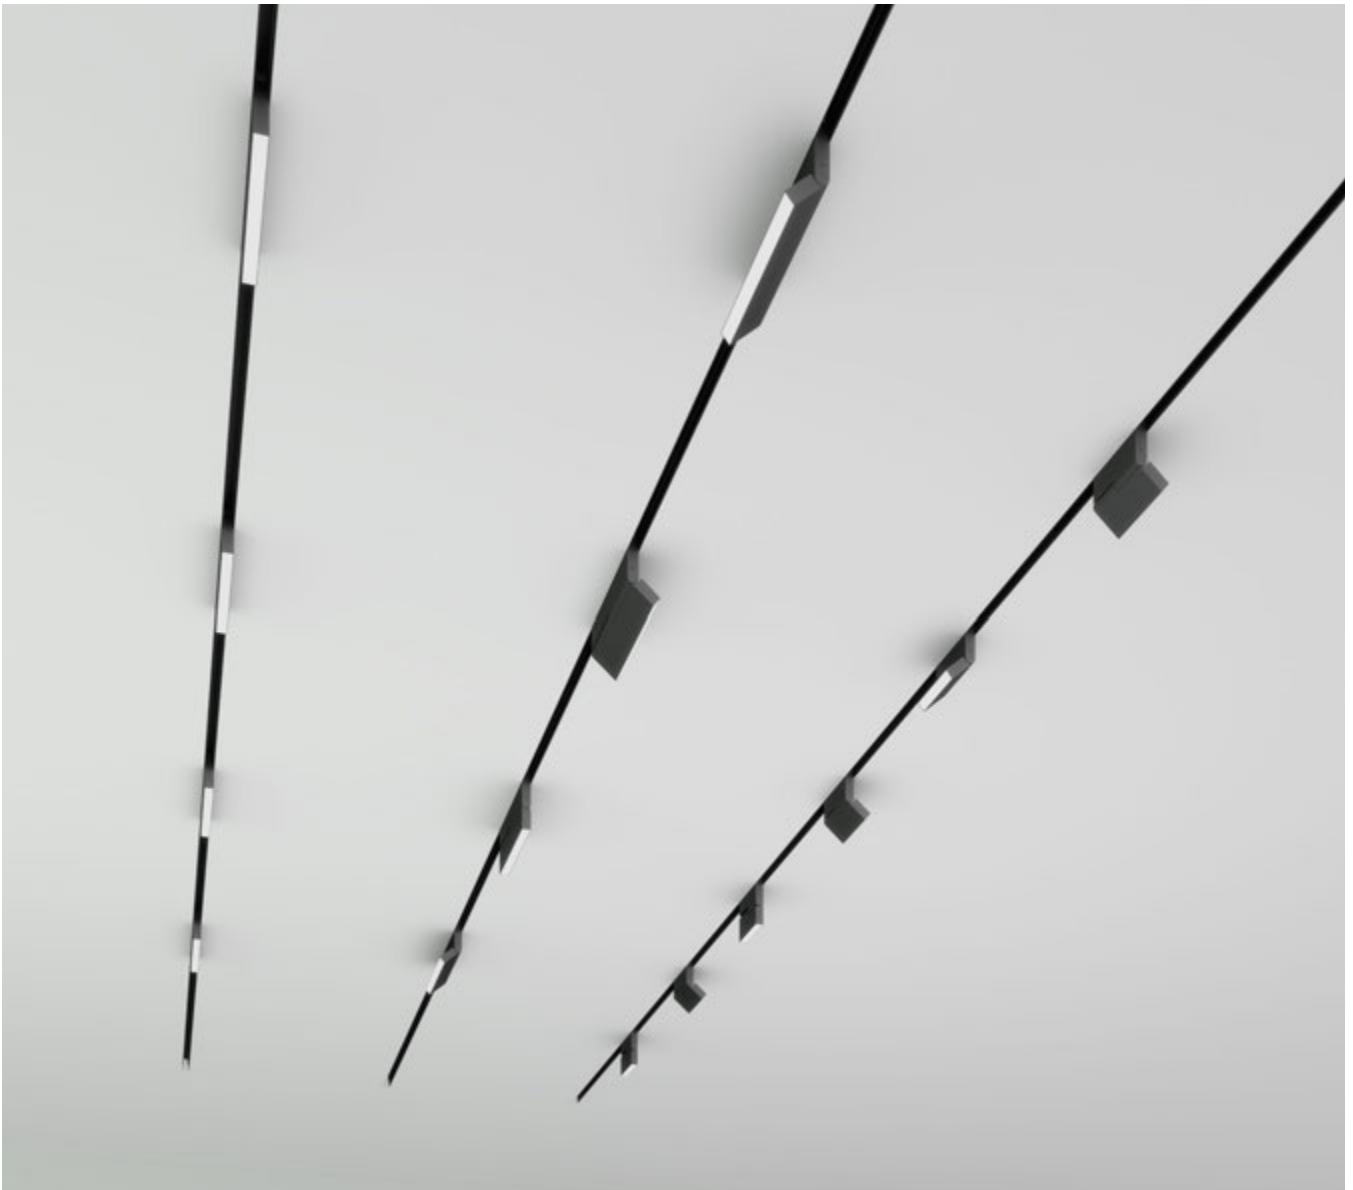

**OPTIONS**

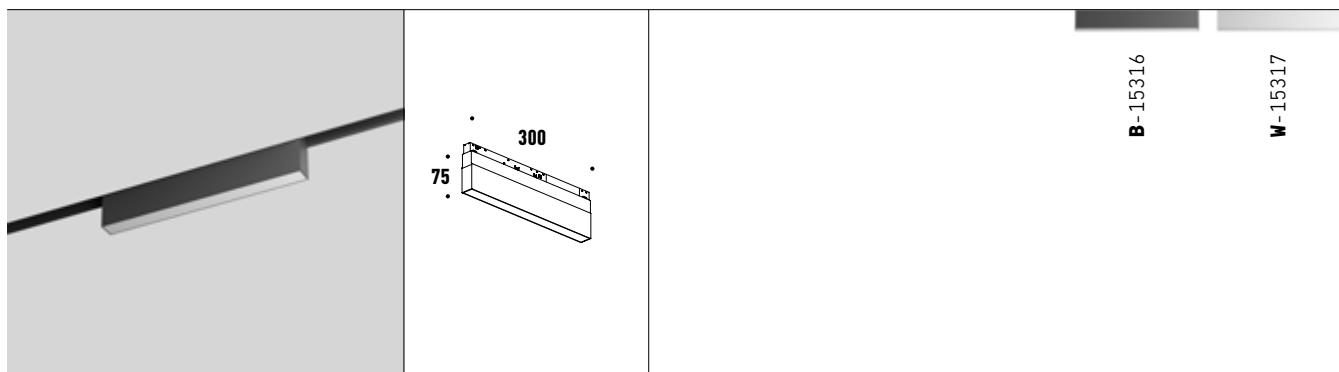

**B-15316**

**W-15317**


**OUT 30cm**

lm	K	W	Control	Lens
2180	3000	25	On-Off	90°

**Dimming**

0-10V\* 15278

DALI\* 15279

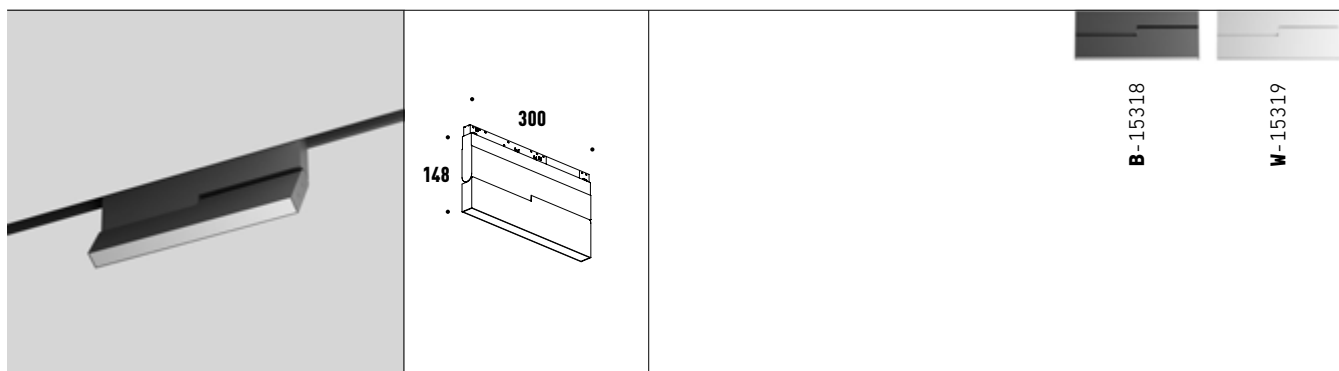

**B-15318**

**W-15319**


**BOOK 30cm**

lm	K	W	Control	Lens
2180	3000	25	On-Off	90°

**Dimming**

0-10V\* 15278

DALI\* 15279

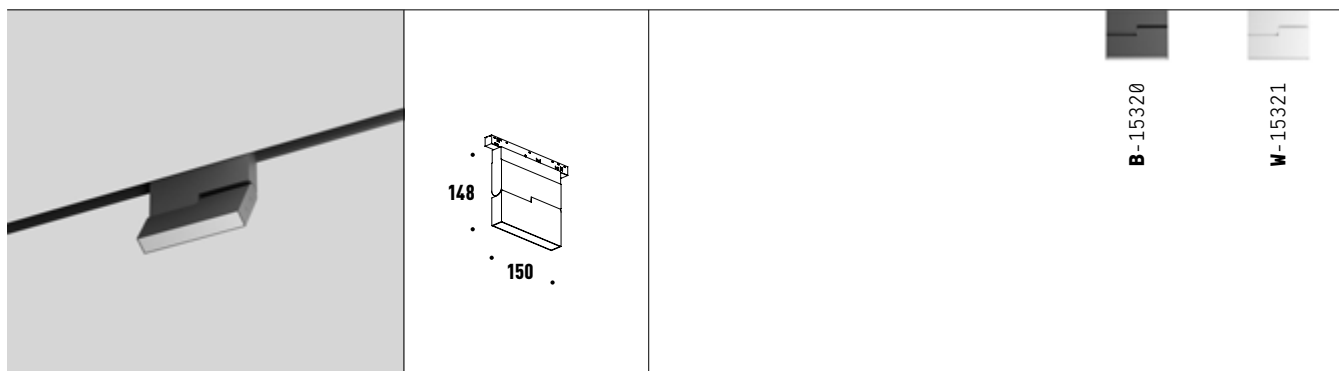

**B-15320**

**W-15321**

**BOOK 15cm**

lm	K	W	Control	Lens
1035	3000	15	On-Off	90°

**Dimming**


0-10V\* 15278

DALI\* 15279

\* not included


# MOON

- Clean minimal design.
- Diffused light effect.
- Available in different finishes.
- Integration with Low Voltage.
- DALI version available.

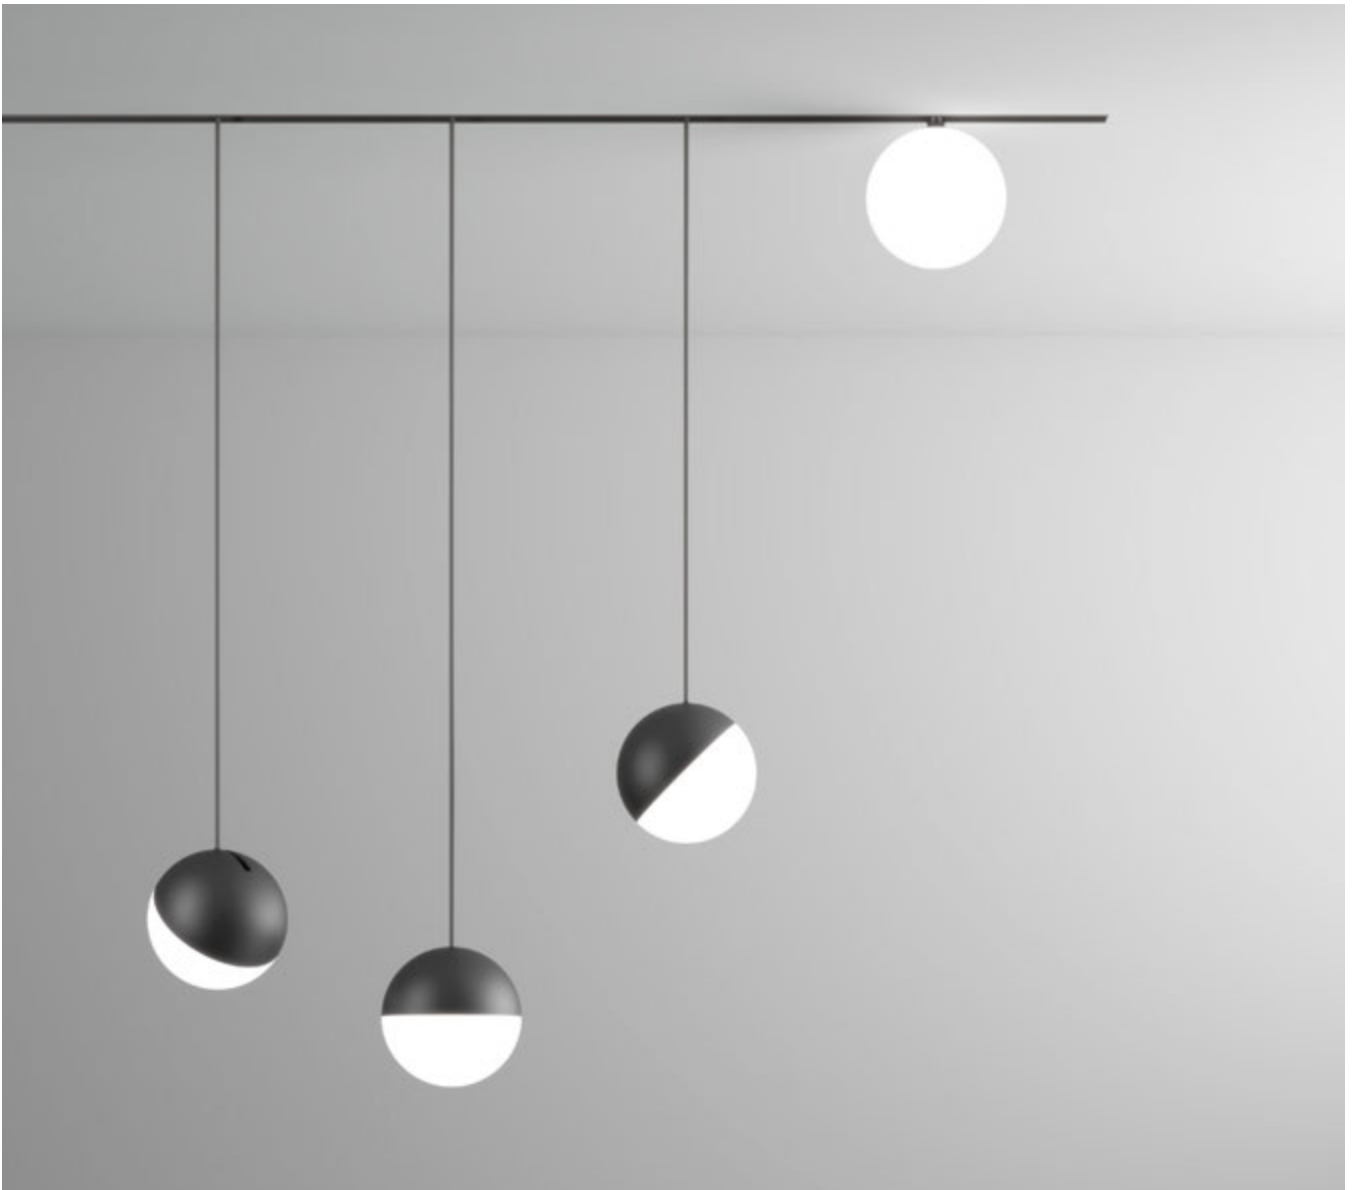




### OPTIONS

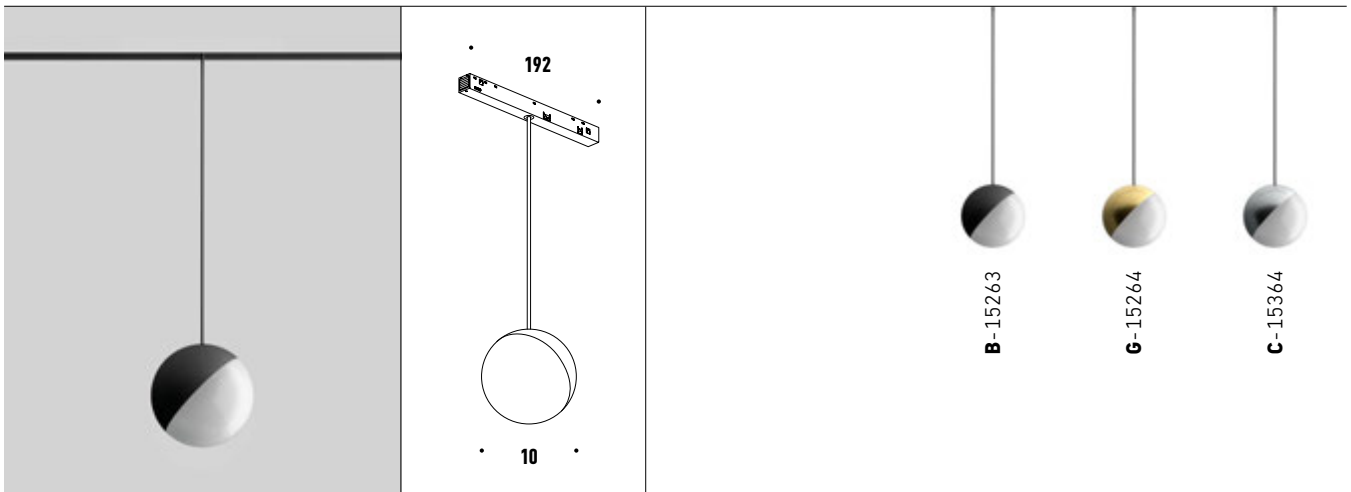

## MOON

lm	K	W	Control	Lens	Dimming
260	3000	8	On-Off	90°	0-10V* 15278
					DALI* 15279

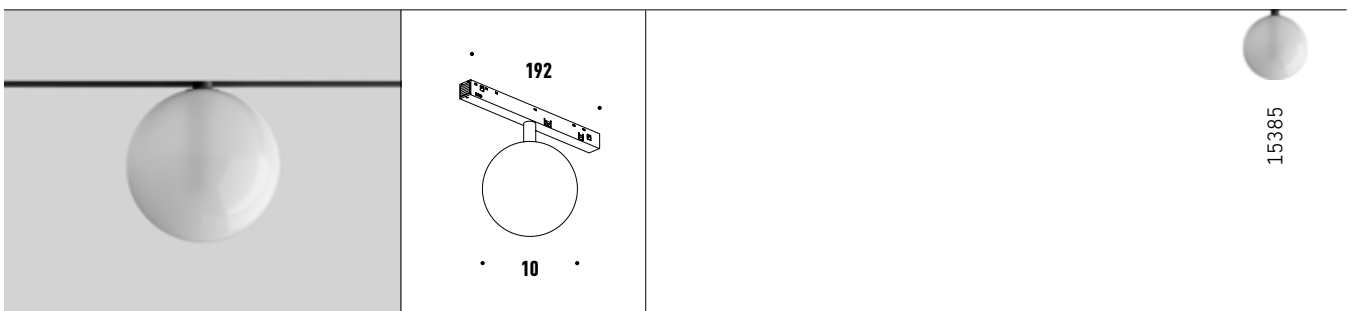

## GLASS BALL

lm	K	W	Control	Lens	Dimming
216	3000	4.5	On-Off	90°	0-10V* 15278
					DALI* 15279

\* not included











**HEADQUARTER**

Hatnufa 7 St.  
9342207 Jerusalem  
Israel

**LOGISTIC CENTER**

Tsela ha-Har St. 47  
7178127 Modein  
Israel

T +972 (2) 6727811/2

F +972 (2) 6727813

office@clight-led.com  
export@clight-led.com

**Clight**

by **Cabasso Group**